

Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
1,000 lb	17262	3 lb	Consult
2,500 lb	17263	3 lb	Consult
4,000 lb	17264	3 lb	Consult
5,000 lb	17265	5 lb	Consult
10,000 lb	17266	5 lb	Consult

Dimensions

Rated Capacity	C	H	H1	L	L1	L2	L3	L4	T	W
1,000 to 4,000	0.53	1.22	0.61	5.12	0.62	1.00	3.00	2.25	1/2-20 UNF	1.22
5,000 to 10,000	0.78	1.50	0.75	6.75	0.75	1.50	3.75	3.00	3/4-16 UNF	1.50

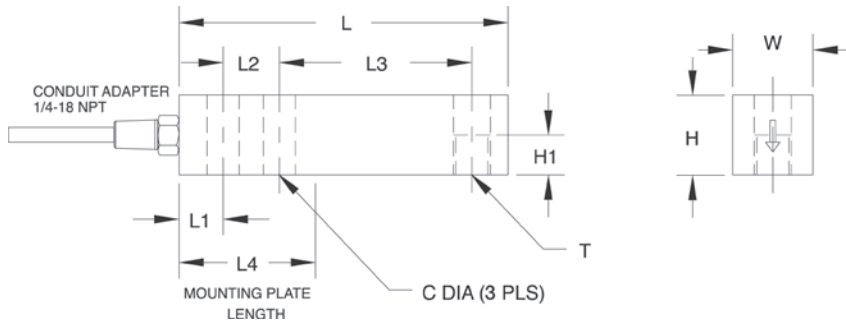

Interchangeable Products

VPG® CELTRON
SQB-HSS page 206

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS
RL50210TA.....page 43
 RICE LAKE WEIGHING SYSTEMS
RL1800 Series..... page 54

Specifications

Full Scale Output:
 3.0 mV/V

Output Resistance:
 349 to 355 ohm

Input Resistance:
 343 to 357 ohm

Material/Finish:
 Stainless steel

Temperature:
 Operating range
 0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:
 Welded-seal, IP67
 (Conduit is recommended for maximum protection against the ingress of water and moisture through the cable entry)

Safe Overload:
 150% full scale

Safe Sideload:
 100% full scale

Rated Excitation:
 5 to 10 VDC (15 V maximum)

Combined Error:
 0.03% full scale

Non-Repeatability:
 0.01% full scale

Insulation Resistance:
 5,000 megohm

Deflection at Capacity:
 1,000 to 4,000 lb: 0.008 to 0.026 in
 5,000 to 10,000 lb: 0.030 to 0.055 in

Cable Length:
 20 ft

Cable Diameter:
 0.220 in PTFE jacket

Conduit Adapter Size:
 1/4-18 NPT

Cable Color Code:
 Red +Excitation
 Black -Excitation
 Green +Signal
 White -Signal

Warranty:
 One-year limited

Approvals:
 cFMus