


CW-90XB

Light-capacity Bench Scale

BENCH SCALES

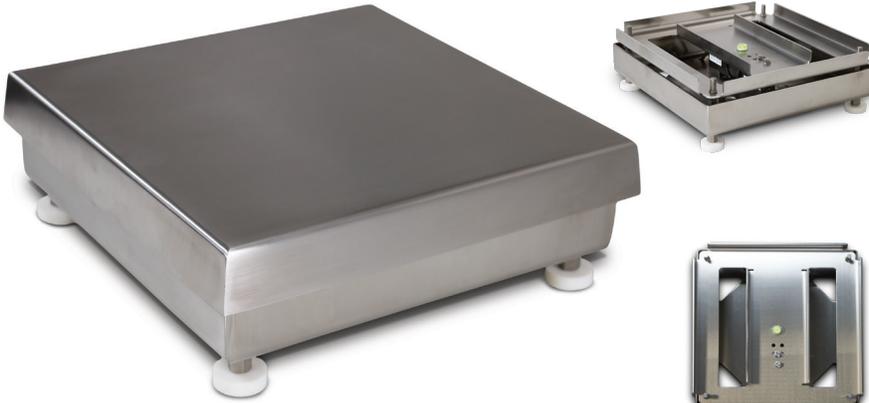

Standard Features

- IP69K, stainless steel hermetically sealed load cell
- 304 stainless steel construction
- Meets HACCP requirements
- Five-point overload protection
- Specially designed adjustable support feet provide exceptional traction and will not scratch surfaces

Specifications

Load Cell, NTEP Certified:
IP69K stainless steel and hermetically sealed

Output Impedance:
350 ohm

Maximum Overload:
180% to 200% depending on capacity

Overload Protection:
Five-point, independently adjusted

Scale Frame:
AISI304L, straight line finish, Ra=45 ± 10

Scale Cover:
AISI304L, straight line finish, Ra=45 ± 10

Cable Length:
34 in or 10 ft

Temperature:
Compensated:
14 °F to 104 °F (-10 °C to 40 °C)

Warranty:
Three-year limited
(includes water ingress)

Approvals:
NTEP 95-072, Class III 5,000 d
Measurement Canada AM-5082
NSF
Load cell is FM Approved

Approvals



Measurement
Canada
Approved



Part Number/Price

Part #	Platform Capacity	Dimensions (L × W × H)	Est. Weight	Price	
10 ft Cable	34 in Cable				
112600	106143	5 lb (2.5 kg)	10 × 10 × 4.25 in	14 lb	Consult
112602	106144	10 lb (5 kg)	10 × 10 × 4.25 in	14 lb	Consult
112604	106145	25 lb (10 kg)	10 × 10 × 4.25 in	14 lb	Consult
112606	106146	25 lb (10 kg)	12 × 12 × 4.25 in	17 lb	Consult
112608	106147	50 lb (25 kg)	12 × 12 × 4.25 in	17 lb	Consult
112610	106148	100 lb (50 kg)	12 × 12 × 4.25 in	17 lb	Consult

Options/Accessories

Part #	Description	Catalog Page #
Consult	Scale columns	See page 208
Consult	Ball transfer and roller conveyor scale tops	See page 207
Consult	Mobile scale carts	See page 203 to page 206

Dimensions

CW-90XB			
10 × 10 in			
A	4.25 in	C	10.00 in
B	10.00 in	C1	10.25 in
B1	10.25 in		

Note: 1 in = 25.4 mm

12 × 12 in			
A	4.25 in	C	12.00 in
B	12.00 in	C1	12.25 in
B1	12.25 in		

Note: 1 in = 25.4 mm

