

ROCKER COLUMN
RL82021

Stainless Steel, Hermetically Sealed, NTEP Certified 1:10,000 Class IIIIL Multiple Cell, IP69K



Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
30 t	221271	8 lb	Consult
40 t	207495	8 lb	Consult
Load Cup Kits			
30 t	223356	7.50 lb	Consult
40 t	223357	7.94 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	Ball r
t/in					
30	5.51	2.76	1.10	0.28	7.09
40	5.91	2.95	1.30	0.47	7.87

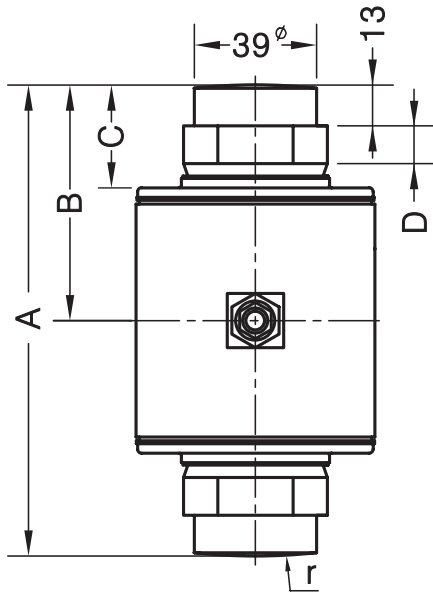

Specifications

- Full Scale Output:**
2.0 mV/V
- Output Resistance:**
1,005 (± 5) ohm
- Input Resistance:**
1,150 (± 50) ohm
- Material/Finish:**
Stainless steel
- Temperature:**
Compensated:
14 °F to 104 °F (-10 °C to 40 °C)
Operating:
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Hermetically sealer, IP69K
- Safe Overload:**
120% full scale
- Rated Excitation:**
5 to 10 VDC
- Combined Error:**
0.013% full scale
- Non-repeatability:**
0.01% full scale
- Insulation Resistance:**
5,000 megohm
- Deflection at Capacity:**
0.621 mm
- Cable Length:**
18 m overbraid cable
- Cable Color Code:**
Green +Excitation
Black -Excitation
Red +Signal
White -Signal
Blue +Sense
Yellow -Sense
- Warranty:**
Two-year limited
- Approvals:**
NTEP 21-071