
## RoughDeck® HP and SS Forklift Portability Frames

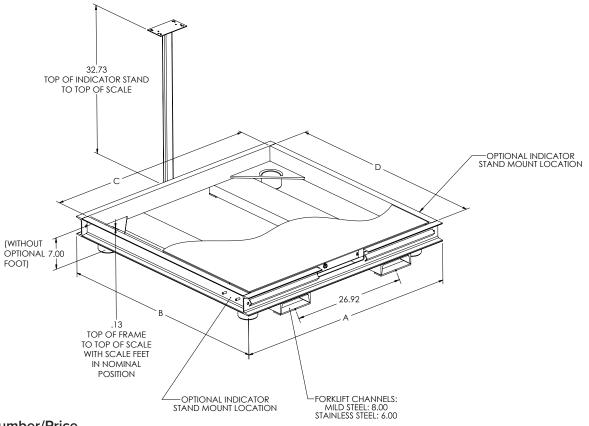

## Part Number/Price

Part #	Size (W × L)	Est. Weight	Price		
RoughDeck HP Portability Frames					
164492	$4 \times 4$ ft, up to 10,000 lb capacity, floor stand for indicator 36.3 in high, indicator stand mounting bracket	275 lb	Consult		
164493	$5 \times 5$ ft, up to 10,000 lb capacity, floor stand for indicator 36.3 in high, indicator stand mounting bracket 400 lb		Consult		
RoughDeck SS Portability Frames					
164494	$4 \times 4$ ft, up to 10,000 lb capacity, floor stand for indicator 36.3 in high, indicator stand mounting bracket	275 lb	Consult		
164495	$5 \times 5$ ft, up to 10,000 lb capacity, floor stand for indicator 36.3 in high, indicator stand mounting bracket	400 lb	Consult		

NOTE: Indicator stand mount bracket works with 120/120 Plus, 882IS/882IS Plus, 882IS/882IS Plus w/battery, 880/880 Plus, 480/480 Plus, 482/482 Plus, 680 Synergy NOTE: Consult factory if you intend on using with a pallet jack

## **Options**

Part #	Size (L × W)	Est. Weight	Price
Options			
74574	SST, captured ball foot 3.00 in diameter 1/2-20 UNF thread with jam nut	3.0 lb	Consult

## **Dimensions**

Portability Frame 4 × 4ft					
В	Mild steel: 51.92 in	Stainless steel: 52.75 in			
С	48.75 in				
D	48.75 in				
5 × 5 ft					
Α	Mild steel: 63.92 in	Stainless steel: 64.75 in			
В	Mild steel: 63.92 in	Stainless steel: 64.75 in			
С	60.75 in				
D	60.75 in				
Distanc	e from floor to inside of strap on t	ne fork entry (without optional foot) (4 × 4 ft)			
	Mild steel: 3/4 in	Stainless steel: 1/2 in			
Distanc	e from inside of strap to top of the	fork entry (without optional foot) (5 × 5 ft)			
	Mild steel: 2 in	Stainless steel: 2 1/4 in			

Note: 1 in=25.4 mm