

MSI-8004HD

Indicator/RF LED Remote Display



Standard Features

- IP65 rugged milled aluminum enclosure
- Backlit membrane keypad for user functioning and controls
- Tilt bracket included



Options

- Expanded relay outputs
- Battery pack for mobile operation
- 2nd radio module for additional network connectivity

Approvals



Measurement
Canada
Approved

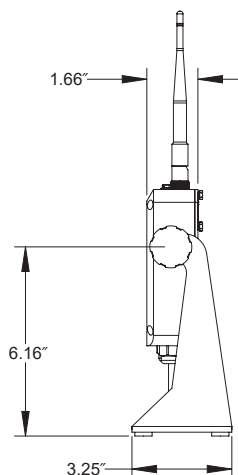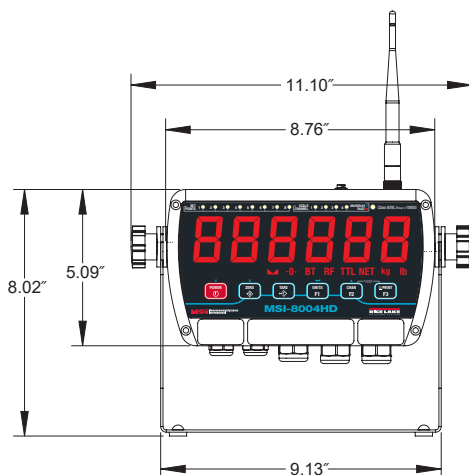

Specifications

Display

Six-digit, 38 mm LED display with red/green or blue coloring

Enclosure:

NEMA Type 4, IP65 milled anodized aluminum

Keypad:

On/Off, Zero, Tare, Print and two user-defined keys

Functions:

Peak hold, high resolution, total, view total, net/gross, units switching

Units:

Pounds, kilograms, tons, metric tons, kilonewtons

Annunciators:

Stable, COZ, peak, kg, kN, lb, M, ton, setpoint, function LEDs

Channels:

1, 2, 3, 4, TTL

Power:

90-267 VAC, 9-36 VDC, 18-72 VDC, 120-300 VDC

Temperature:

-20° C to 60° C

RF Remote Channels:

Up to 4 remote sensors monitored individually, in pairs or sum all (non-A/D version only) (when used with TranSend)

Service Counters:

A/D version only

A/D Inputs:

Four independent or summing load cell inputs

Excitation:

4,8 V current limited and over-voltage protected

Filtering:

Off, Low, Hi-1, Hi-2

RF Radio Link:

2,4 GHz 802.15.4, optional second channel for Serial RF, 802.11 Wi-Fi, cellular connectivity or Bluetooth®

RF Effective Range:

Typically 91,44 m line of sight

Data I/O:

Two RS-232 hard wired communication ports

Approvals:

NTEP COC #17-036, Measurement Canada

Warranty:

One-year limited warranty

Part Number/Price

Indicator		
Part #	Description	Price
178263	MSI-8004HD Indicator, 4CH AC, Blue 85~264VAC, 47~440 Hz, 120~370VDC	Consult
178265	MSI-8004HD Indicator, 4CH AC, Red/Green 85~264VAC, 47~440 Hz, 120~370VDC	Consult
178267	MSI-8004HD Indicator, 4CH DC 8-32V, Blue Best for external 12V SLA Batteries	Consult
178269	MSI-8004HD Indicator, 4CH DC 8-32V, Red/Green Best for external 12V SLA Batteries	Consult
178270	MSI-8004HD Indicator, 4CH DC 9-36V Iso, Blue Do not use on 12V Vehicle Systems	Consult
178271	MSI-8004HD Indicator, 4CH DC 9-36V Iso, Red/Green Do not use on 12V Vehicle Systems	Consult
183480	MSI-8004HD Indicator, 4CH DC 5V Blue, 38,1 mm LED Display For use with external 15W, 5V Power Supplies	Consult
183481	MSI-8004HD Indicator, 4CH DC 5V Red/Green 38,1 mm LED Dual Color Display For use with external 15W, 5V Power Supplies	Consult
Remote Display		
178279	MSI-8004HD Display, AC, Blue 85~264 VAC, 47~440 Hz, 120~370 VDC	Consult
178281	MSI-8004HD Display, AC, Red/Green 85~264 VAC, 47~440 Hz, 120~370 VDC	Consult
178282	MSI-8004HD Display DC, 8-32V, Blue Best for external 12 V SLA Batteries	Consult
178283	MSI-8004HD Display, DC 8-32V, Red/Green Best for external 12 V SLA Batter	Consult
178284	MSI-8004HD Display, DC 9-36V Iso, Blue Do not use on 12 V Vehicle Systems	Consult
178285	MSI-8004HD Display, DC 9-36V Iso, Red/Green Do not use on 12 V Vehicle Systems	Consult
183478	MSI-8004HD Display, DC 9-36V Iso, Blue, 38,1 mm LED Display Do not use on 12 V Vehicle Systems	Consult
183479	MSI-8004HD Display, DC 9-36V Iso, Red/Green, 38,1 mm Dual Color LED Display Do not use on 12 V Vehicle Systems	Consult

Options

Part #	Description	Price
148624	Serial Cable, RS-232 9000 Serial Cable, DCE	Consult
139309	Antenna Kit, Long Range Omni-directional, 9 dBi with 3 m Coax Intended for omni-directional mast mounting (up to 51 mm Ø). Beam-width. Must be mounted vertically.	Consult
139310	Antenna Kit, Corner Reflector, 9 dBi with 3 m coax intended for directional wall or mast mounting (up to 51 mm Ø). Beam-width: 75° Elevation, 65° Azimuth	Consult
139311	Antenna Kit, Corner Reflector, 12 dBi with 3 m coax intended for directional wall or mast mounting (up to 51 mm Ø). Beam-width: 50° Elevation, 36° Azimuth	Consult
139312	Antenna Kit, YAGI, 15 dBi with 3 m coax highly directional wall or mast mounting (up to 51 mm Ø). Beam-width: 30° Elevation, 34° Azimuth	Consult
139313	Antenna Kit, Vehicle Mount, 5 dBi with 5 m coax omni-directional. Mounts in 19,1 mm Hole.	Consult
155173	Option kit, tilt stand	Consult
155193	Option kit, Ethernet (hard wired) RJ-45 Cable (included)	Consult
171203	Audible alarm Not compatible with battery versions 22436	Consult
22436	Cable, Comm DB9F 9 Pin Fem One end stripped and tinned on other end 6 Pin 2 (Brown) Pin 3 (Red) Pin 5 (Yellow) For use with MSI-8004HD serial ports to connect to: Scoreboard displays, printers, computers & other equipment that supports RS-232	Consult
183437	Battery, 5V Li-ion battery with USB power ports. Output 5V/3,0A per port (6,0 A max)Rate, 2A per port (4A if both ports are used)	Consult
184132 *	8004 option kit, Bluetooth® with SMA antenna	Consult
184131	8004 option kit, WiFi with SMA antenna	Consult
182224	Power Adapter, 12VDC 5VDC Dual USB Car Charger plus 0,9m USB Cable	Consult
Relays		
172500	Expanded Relays Option Kit, four-channel, 3A, 60VPK SSR form C	Consult
172501	Expanded Relays Option Kit, eight-channel, 3A 60VPK, SSR form C	Consult
172493	Expanded Relays Option Kit, four-channel, 3A 60VPK, AC/DC SSR	Consult
172497	Expanded Relays Option Kit, eight-channel, 3A 60VPK, AC/DC SSR	Consult
172494	Expanded Relays Option Kit, four-channel, 0,9A 200VPK, AC/DC SSR	Consult
172502	Expanded Relays Option Kit, eight-channel, 0,9A 200VPK, SSR form C	Consult
172498	Expanded Relays Option Kit, eight-channel, 0,9A 200VPK, SSR	Consult
172492	Expanded Relays Option Kit, four-channel, 12A 5V, momentary	Consult
172495	Expanded Relays Option Kit, eight-channel, 12A 5V, momentary	Consult
172490	Expanded Relays Option Kit, four-channel, 12A 5V, latching relays	Consult
171676	Expanded Relays Option Kit, eight-channel, 12A 5V, latching relays	Consult

* Bluetooth modems only work with certain Android devices. Please contact office for potential applications.