2021

Traster Catalog



CELEBRATING 75 YEARS OF SERVICE. 1946 - 2021



800-472-6703 **www.ricelake.com**

Medical Scales

TABLE OF CONTENTS	
RL-330HHD/RL-330HHL DIAL HOME HEALTH SCALE836	
DHH-10 DIGITAL HOME HEALTH SCALE837	
RL-MPS MECHANICAL PHYSICIAN SCALE838	
RL-MPS-10 MECHANICAL PHYSICIAN SCALE839	
RL-MPS-20 MECHANICAL PHYSICIAN SCALE840	
RL-MPS-30 MECHANICAL PHYSICIAN SCALE841	
RL-MPS-40 MECHANICAL PHYSICIAN SCALE842	
RL-MPS-50 MECHANICAL PHYSICIAN SCALE843	
150-10-5 DIGITAL PHYSICIAN SCALE EYE-LEVEL844	
150-10-6 DIGITAL PHYSICIAN SCALE WAIST-LEVEL 846	
150-10-7 DIGITAL PHYSICIAN SCALE848	
160-10-7N DIGITAL ATHLETIC LOW-PROFILE SCALE849	
RL-WMS-10 WALL MOUNT STADIOMETER850	
RL-MIS MECHANICAL BABY SCALE851	
RL-MIS-20 MECHANICAL BABY SCALE852	
DIGITAL BABY SCALE - SUSPENDED INFANT SCALE853	
RL-DBS DIGITAL BABY SCALE 854	
RL-DBS-2 DIGITAL BABY SCALE855	
D400 ADULT AND CHILD SCALE856	
650-10-1 NEONATAL SCALE857	
RL-PMM PEDIATRIC MEASURING MAT858	
RL-PCT-10 PEDIATRIC CIRCUMFERENCE TAPE858	
260-10-1 BARIATRIC HANDRAIL SCALE859	
250-10-2 BARIATRIC HANDRAIL SCALE860	
250-10-4	

RL-MCS RICE LAKE	
MECHANICAL CHAIR SCALE	862
560-10-1 DIGITAL CHAIR SCALE	863
550-10-1 DIGITAL CHAIR SCALE	864
D300 SERIES WIRELESS WHEELCHAIR SCALE	865
350-10-3M DUAL-RAMP WHEELCHAIR SCALE	866
350-10-2 SINGLE-RAMP WHEELCHAIR SCALE	867
350-10-7 SINGLE-RAMP WHEELCHAIR PLATFORM SCALE	868
350-10-3 DUAL-RAMP WHEELCHAIR SCALE	869
350-10-4 DUAL-RAMP	
WHEELCHAIR SCALE	870
350-10-8 DUAL-RAMP WHEELCHAIR PLATFORM SCALE	871
RL-350-5 SINGLE-RAMP PORTABLE BARIATRIC WHEELCHAIR SCALE	872
RL-350-6 DUAL-RAMP PORTABLE BARIATRIC WHEELCHAIR SCALE	873
SB-1150 SUMMIT™ BARIATRIC WHEELCHAIR SCALE	874
SD-1150-WP DIALYSIS WHEELCHAIR SCALE	875



BARIATRIC HANDRAIL SCALE861

Product names, logos, brands and other trademarks featured or referred to within this publication are the property of their respective trademark holders.

RL-330HHD/RL-330HHL **Dial Home Health Scale**





Model RL-330HHL

Standard Features

- Durable steel base and platform
- Non-slip mat
- Large dial display
- Units of measure: lb (RL-330HHL); lb, kg (RL-330HHD)
- · Colorful markers to track weight values

Part Number/Price


Part #	Model #	Capacity	Price
110592	RL-330HHL	330 lb x 1 lb (lb markings only)	\$64.00
113500	RL-330HHD	330 lb x 1 lb (150 kg x 0.5 kg) (lb and kg)	\$64.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
110592	RL-330HHL	19	13	5	9	9	9
113500	RL-330HHD	19	12	6	9	10	10

Dimensions

	Inches	Centimeters
Α	11.2	28.5
В	16.9	43
С	2.5	6.4
D	7.9	20.1



Specifications

Capacity:RL-330HHL: 330 lb x 1 lb
RL-330HHD: 330 lb x 1 lb (150 kg x 0.5 kg)

Warranty:One-year limited warranty

DHH-10 Digital Home Health Scale

Specifications

Capacity: 440 lb x 0.2 lb (200 kg x 0.1 kg)

Dimensions:

(W x L x H) 15.4 in x 11.8 in x 1 in

Battery Type: (2) AAA alkaline batteries (included)

Display

Digit size: 1.75 in

Warranty:

One-year limited warranty

Approvals: CE Marked

DHH-10BT:

Designed to work with AccuroFit App available for Apple and Android







Model DHH-10

Standard Features

- 8 mm tempered safety glass weighing surface
- · Low battery indication
- Display lb or kg
- · Large LCD display

APPROVALS



Part Number/Price


Part #	Model #	Capacity	Price				
Master Carton							
*195261	DHH-10	440 lb x 0.2 lb (200 kg x 0.1 kg)	\$105.00				
*195262	DHH-10BT	440 lb x 0.2 lb (200 kg x 0.1 kg) with Bluetooth	\$132.00				
Single Carton	Single Carton						
201124	DHH-10	440 lb x 0.2 lb (200 kg x 0.1 kg)	\$64.00				
201125	DHH-10BT	440 lb x 0.2 lb (200 kg x 0.1 kg) with Bluetooth	\$77.00				

^{*(2)} scales contained in each master carton

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)	
Master C	Master Carton							
195261	DHH-10	18	15	4	13.7	7.8	13.7	
195262	DHH-10BT	18	15	4	13.7	7.8	13.7	
Single Ca	Single Carton							
201124	DHH-10	17	13	2	6.5	3.0	6.5	
201125	DHH-10BT	17	13	2	6.5	3.0	6.5	

	Inches	Centimeters
Α	15.4	39
В	11.8	30
С	1	2.5

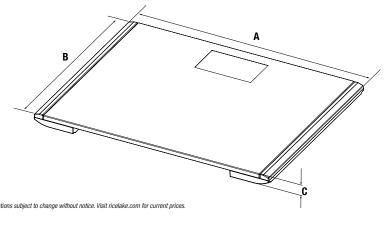

RL-MPS Mechanical Physician Scale

Lb and Kg



Specifications

Capacity: 440 lb x 4 oz (200 kg x 100 g)

Platform Dimensions:

(W x L x H) 10.75 in x 14.75 in x 4.125 in

Height Rod:

24-84 in (60-212 cm)

Height Division:

0.125 in (0.1 cm)

Warranty:

Two-year limited warranty

Standard Features


- · Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Durable wheels for easy transport
- · Easy operation with two sliding weights
- Removable slip-resistant scale base cover
- Aluminum height rod measures from 24 to 84 in (60 to 212 cm)

Part Number/Price

Part #	Model #	Capacity	Price
102613	RL-MPS	440 lb x 4 oz (200 kg x 100 g)	\$315.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
102613	RL-MPS	60	21	7	42	64	64

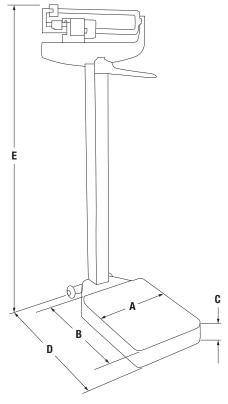

	Inches	Centimeters
Α	10.8	27.4
В	14.8	37.6
C	4.1	10.4
D	22.3	56.6
E	58.5	148.6

Specifications

Capacity: 450 lb x 4 oz

Platform Dimensions:

(W x L x H) 10.75 in x 14.75 in x 4.125 in

Height Rod:


24-84 in

Height Division:

0.125 in

Warranty:

Two-year limited warranty

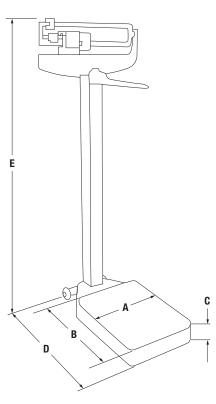

Dimensions

	Inches	Centimeters
Α	10.8	27.4
В	14.8	37.6
С	4.1	10.4
D	22.3	56.6
Е	58.5	148.6





Standard Features

- · Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Durable wheels for easy transport
- Easy operation with two sliding weights
- Removable slip-resistant scale base cover
- Aluminum height rod measures from 24 to 84 inches

Part Number/Price

Part #	Model #	Capacity	Price
124223	RL-MPS-10	450 lb x 4 oz	\$315.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
124223	RL-MPS-10	60	21	7	42	64	64

RL-MPS-20 Mechanical Physician Scale

Lb and Kg





Specifications

Capacity: 440 lb x 4 oz (200 kg x 100 g)

Platform Dimensions:

(W x L x H) 10.75 in x 14.75 in x 4.125 in

Warranty:

Two-year limited warranty

Standard Features


- · Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Easy operation with two sliding weights
- Removable slip-resistant scale base cover

Part Number/Price

Part #	Model #	Capacity	Price
124222	RL-MPS-20	440 lb x 4 oz (200 kg x 100 g)	\$300.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
124222	RL-MPS-20	60	21	7	36	64	64

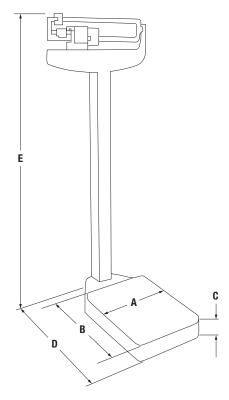

	Inches	Centimeters
Α	10.8	27.4
В	14.8	37.6
С	4.1	10.4
D	22.3	56.6
E	58.5	148.6

RL-MPS-30 Mechanical Physician Scale

Specifications

Capacity: 180 kg x 100 g

Platform Dimensions:

(W x L x H) 27.5 cm x 37.5 cm x 10.5 cm

Height Division:


0.1 cm

Height Rod:

60-212 cm

Warranty:

Two-year limited warranty

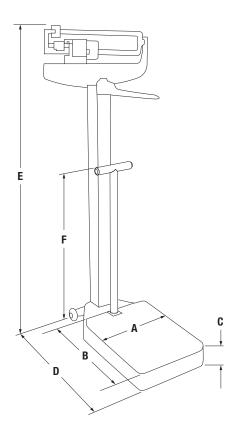

Dimensions

	Inches	Centimeters
Α	10.8	27.4
В	14.8	37.6
С	4.1	10.4
D	22.3	56.6
Е	58.5	148.6
F	31.5	80.0





Standard Features

- · Sturdy, enameled steel body
- Painted beam
- · Rugged scale understructure
- Handpost
- · Durable wheels for easy transport
- · Easy operation with two sliding weights
- Removable slip-resistant scale base cover
- Aluminum height rod measures from 60 to 212 cm

Part Number/Price

Part #	Model #	Capacity	Price
132703	RL-MPS-30	180 kg x 100 g	\$350.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
	RL-MPS-30		21	7	40	64	64

RL-MPS-40 Mechanical Physician Scale

Lb and Kg



Specifications

Capacity with counterpoise weights: 490 lb x 4 oz (220 kg x 100 g)

Platform Dimensions:

(W x L x H) 10.75 in x 14.75 in x 4.125 in

Height Rod:

24-84 in (60-212 cm)

Height Division:

0.125 in (0.1 cm)

Warranty:

Two-year limited warranty

Standard Features


- Dual-read capacity and height rod
- · Sturdy enameled steel body
- · Painted beam designed to hold counterpoise weights
- Rugged scale understructure
- · Removable slip-resistant plastic base cover
- Retractable aluminum height rod
- · Easy operation with two sliding weights and two counterpoise weights
- · Rear wheels for portability ease
- Aluminum height rod measures from 24 to 84 in (60 to 212 cm)

Part Number/Price

Part #	Model #	Capacity	Price
185289	RL-MPS-40	490 lb x 4 oz (220 kg x 100 g)	\$340.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
185289	RL-MPS-40	60	21	7	44	64	64

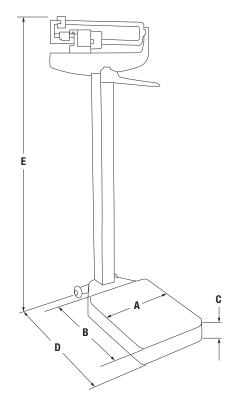

	Inches	Centimeters					
Α	10.8	27.4					
В	14.8	37.6					
С	4.1	10.4					
D	22.3	56.6					
F	58.5	148.6					

RL-MPS-50 Mechanical Physician Scale

Lb and Kg

Specifications

Capacity: 450 lb x 4 oz (200 kg x 100 g)

Platform Dimensions:

(W x L x H) 11.02 in x 14.96 in x 4.21 in

Height Division:


0.25 in (5 mm)

Height Rod:

29.5-78.75 in (75-200 cm)

Warranty:

One-year limited warranty

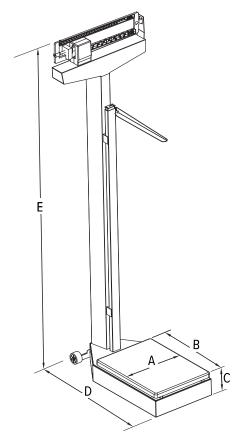



Standard Features

- Ease of transport with rear wheels
- Aluminum height rod included
- Poise travels free on weigh beam with simple finger tap
- Easy-to-read weigh beam's color-coded black inset shows LB markings, white inset shows KG markings. The beam can be rotated to the desired unit of measure.

Part Number/Price

Part #	Model #	Capacity	Price
195264	RL-MPS-50	450 lb x 4 oz (200 kg x 100 g)	\$315.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
195264	RL-MPS-50	60	21	5	39	46	46

Dimensions

	Inches	Centimeters
Α	11	28.9
В	15	38.1
С	4.2	10.7
D	22.2	56.4
E	58.9	149.6





843

150-10-5 Digital Physician Scale Eye-level



Standard Features

- Large, stable scale base
- Integrated height rod measures from 27.5 in to 82 in (70 cm to 208 cm)
- · Rubber wheels for easy transport
- Push-button LCD display
- · Unit of measure toggle or locking
- Motiontrap[™] movement compensation technology
- · EHR capable
- USB, Bluetooth 2.0, or BLE 4.0 available, part number selectable
- Hold function
- · Zero function
- . BMI (body mass index) function
- · Factory calibrated

Part Number/Price

Part #	Model #	Capacity	Price
119113	150-10-5	550 lb x 0.2 lb (250 kg x 0.1 kg), with USB	\$615.00
194726	150-10-5BLE	550 lb x 0.2 lb (250 kg x 0.1 kg), with Bluetooth® BLE 4.0	\$850.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
11911	3 150-10-5	30	18	9	26	35	35
19472	6 150-10-5BLE	30	18	9	26	35	35

Specifications

Capacity:

550 lb x 0.2 lb (250 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 14.5 in x 14.5 in x 3 in

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type: Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty

150-10-5 Digital Physician Scale Eye-level

Options/Accessories

Part #	Description	Price
115655 <i>†</i>	9 VDC adaptor, 120 V/230 V auto switching c-MET medical grade power supply	\$43.00
133077 <i>†</i>	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ††	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00






† NEMA 1-15 Plug

†† CEE 7/16 Plug

	Inches	Centimeters
Α	54	137.2
В	22.4	57
С	14.7	37.5
D	3.0	7.6

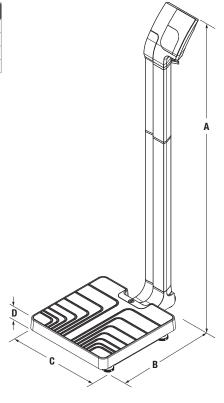

150-10-6 Digital Physician Scale Waist-level



Standard Features

- · Large, stable scale base
- · Rubber wheels for easy transport
- · Push- button LCD display
- · Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- · EHR capable
- USB, Bluetooth 2.0, or BLE 4.0 available, part number selectable
- Hold function
- Zero function
- · BMI (body mass index) function
- · Factory calibrated

Part Number/Price

Part #	Model #	Capacity	Price
161786	150-10-6	550 lb x 0.2 lb (250 kg x 0.1 kg), with USB	\$595.00
194732	150-10-6BLE	550 lb x 0.2 lb (250 x 0.1 kg), with Bluetooth® BLE 4.0	\$830.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
161786	150-10-6	30	19	9	25	37	37
194732	150-10-6BLE	30	19	9	25	37	37

Specifications

Capacity:

550 lb x 0.2 lb (250 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 14.5 in x 14.5 in x 3 in

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display: 5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty

150-10-6 Digital Physician Scale Waist-Level

Options/Accessories

Part #	Description	Price
115655 <i>†</i>	9 VDC adaptor, 120 V/230 V auto switching c-MET medical grade power supply	\$43.00
133077 <i>†</i>	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ++	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00






† NEMA 1-15 Plug

†† CEE 7/16 Plug

	Inches	Centimeters
Α	48.4	123
В	22.4	57
С	14.7	37.5
D	3.0	7.6

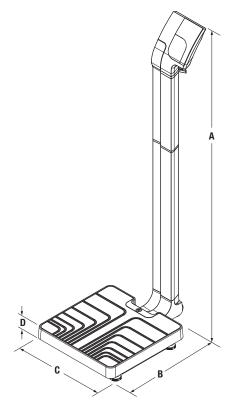

150-10-7 Digital Physician Scale

Floor-level



Standard Features

- · Large, stable scale base
- · Push-button LCD display
- Unit of measure toggle or locking
- Motiontrap[™] movement compensation technology
- · EHR capable
- USB, Bluetooth 2.0, or BLE 4.0 available, part number selectable
- · Hold function
- Zero function
- BMI (body mass index) function
- 6 ft cable between digital display and base
- · Factory calibrated

Part Number/Price

Part #	Model #	Capacity	Price
121304	150-10-7	550 lb x 0.2 lb (250 kg x 0.1 kg), with USB	\$480.00
194728	150-10-7BLE	550 lb x 0.2 lb (250 kg x 0.1 kg), with Bluetooth® BLE 4.0	\$715.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
121304	150-10-7	25	18	6	17	20	20
194728	150-10-7BLE	25	18	6	17	20	20

Options/Accessories

Part #	Description	Price
102508 ††	9 VDC adaptor, 230 V	\$30.00
107445	Carrying case	\$92.00
115655 <i>†</i>	9 VDC adaptor, 120 V/230 V auto switching c-MET medical grade power supply	\$43.00
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00





† NEMA 1-15 Plug

†† CEE 7/16 Plug

Specifications

Capacity: 550 lb x 0.2 lb (250 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 14.5 in x 14.5 in x 3 in

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature: 50° F to 104° F (10° C to 40° C)


Display: 5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty



	Inches	Centimeters
Α	14.7	37.5
В	14.7	37.5
B C D	3.0	7.6
D	7.8	20
E	6.7	17

160-10-7N Digital Athletic Low-profile Scale

Specifications

Capacity: 550 lb x 0.2 lb (250 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 14.4 in x 14.4 in x 1.65 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or 120V/230V AC adaptor, NEMA 1-15 plug (included)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986 NTEP CC 18-011

Measurement Canada AM-6097

Warranty:

Two-year limited warranty



Standard Features

- · Large, stable scale base
- · Push-button LCD display
- · Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EHR capable
- 6 ft cable between digital display and base
- Zero function
- · Factory calibrated

APPROVALS





Part Number/Price

Part #	Model #	Capacity	Price
193355	160-10-7N	550 lb x 0.2 lb (250 kg x 0.1 kg)	\$709.00


Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
193355	160-10-7N	20	18	6	18	16	18

Options/Accessories

- p	, , , , , , , , , , , , , , , , , , , ,	
Part #	Description	Price
107445	Carrying case	\$92.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to BJ-45, 6 ft	\$65.00





	Inches	Centimeters
Α	1.7	4.3
В	14.4	36.6
С	14.4	36.6
D	7.8	20
Е	6.7	17

RL-WMS-10 Wall Mount Stadiometer



Specifications

Master Carton:

10 stadiometers per master carton

Measurement Range:

23 to 82 in (60 to 210 cm)

Height Divisions:

1/16 in (1 mm)

Warranty: One-year limited warranty

Standard Features

- Aluminum construction
- · Folding headpiece makes the product compact when not in use
- Measures both inches and centimeters
- Hardware included for mounting to metal, wood or sheet rock walls

Part Number/Price

Part #	Model #	Capacity	Price
Master Carton			
*195263	RL-WMS-10	23-82 x 1/16 in (60-120 cm x 1 mm)	\$980.00
Single Carton			
206553	RL-WMS-10	23-82 x 1/16 in (60-120 cm x 1 mm)	\$103.00

^{*10} Stadiometers per master carton

RL-MIS Mechanical Baby Scale Lb and Kg Beam

Specifications

Capacity: 135 lb x 1 oz (62 kg x 20 g)

Tray Dimensions:

(W x L x H) 24 in x 16 in x 3 in 61 cm x 41 cm x 7.5 cm

Warranty: Two-year limited warranty



- Painted beam
- · Sturdy, enameled steel body
- Easy-to-clean ABS plastic tray
- · Dual-read capacity; lb and kg
- Built-in measuring tape 0-23 in (0-58 cm)

Part Number/Price

Part #	Model #	Capacity	Price
131470	RL-MIS	135 lb x 1 oz (62 kg x 20 g)	\$350.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
131470	RL-MIS	28	20	14	30	57	57

RL-MIS-20 Mechanical Baby Scale



Specifications

Capacity: 70 kg x 20 g

Tray Dimensions: (W x L x H) 61 cm x 41 cm x 7.5 cm

Warranty:Two-year limited warranty

Standard Features

- · Painted beam
- Sturdy, enameled steel body
- Easy-to-clean ABS plastic tray
- · Unit of measure: kg
- Built-in measuring tape 0-58 cm

Part Number/Price

Part #	Model #	Capacity	Price
131471	RL-MIS-20	70 kg x 20 g	\$350.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
131471	RL-MIS-20	28	20	14	30	57	57

Digital Baby Scale - Suspended Infant Scale

Specifications

Capacity:0S-10: 22 lb x 0.02 lb (22 lb x 0.25 oz) (10 kg x 0.01 kg) OS-25: 55 lb x 0.05 lb (55 lb x 0.5 oz) (25 kg x 0.02 kg) OS-45: 99 lb x 0.1 lb (99 lb x 1 oz) (45 kg x .05 kg)

Power:

Two AA batteries (included)

Operating Temperature: 32° F to 104° F (0° C to 40° C)

Warranty:

One-year limited warranty

Approvals:

CE Marked



Standard Features

- · Hold function
- Units of measure kg/lb/lb-oz
- · Adjustable automatic shut-off
- Ergonomic handheld design
- Carrying case and top s-hook included

APPROVALS



Part Number/Price

Part #	Model #	Capacity	Price
130292	0S-10	22 lb \times 0.02 lb (22 lb \times 0.25 oz) (10 kg \times 0.01 kg)	\$85.00
130293	0S-25	$55 \text{ lb} \times 0.05 \text{ lb} (22 \text{ lb} \times 0.5 \text{ oz}) (25 \text{ kg} \times 0.02 \text{ kg})$	\$85.00
130294	0S-45	99 lb \times 0.1 lb (22 lb \times 1 oz) (45 kg \times 0.05 kg)	\$85.00

Shipping Weight


Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
130292	0S-10	10	5	3	2	2	2
130293	0S-25	10	5	3	2	2	2
130294	0S-45	10	5	3	2	2	2

Options/Accessories

Part #	Description	Price
141444	Suspended pediatric sling seat trousers	\$5.00



Optional suspended pediatric sling trousers



	Inches	Centimeters
Α	14.27	36.25
В	3.62	9.2
С	1.26	3.2
D	11.56	29.35

RL-DBS Digital Baby Scale



Specifications

Capacity: 44 lb x 0.5 oz (20 kg x 10 g)

Power:

Four AA alkaline batteries (included) or AC adaptor (included)

Battery Type: Four AA alkaline (included)

Approvals:

AC adaptor: UL and C-UL

Warranty:

Two-year limited warranty

Standard Features

- Large 1- inch LCD display
- · Unit of measure locking
- · Recall function to view last weight
- · Automatic shut-off for long battery life
- Built-in measuring tape 0-22.5 in (0-57 cm)

Part Number/Price


Part #	Model #	Capacity	Price
107423	RL-DBS	44 lb x 0.5 oz (20 kg x 10 g), includes 120 VAC adaptor	\$143.00
112571	RL-DBS	44 lb x 0.5 oz (20 kg x 10 g), includes 230 VAC adaptor	\$143.00


Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
107423	RL-DBS 120V	28	18	6	8	22	22
112571	RL-DBS 230V	27	18	6	10	21	21

Options/Accessories

Part #	Description	Price
112570	Carrying Case	\$56.00
158463	Growth Chart, Birth to 36 months, Boy, contains 100 sheets	\$26.00
158464	Growth Chart, Birth to 36 months, Girl, contains 100 sheets	\$25.00
158465	Growth Chart, 2-20 years Boy, contains 100 sheets	\$26.00
158466	Growth Chart, 2-20 years Girl, contains 100 sheets	\$26.00








Optional Transport/Carrying Case



Optional Growth Charts



	Inches	Centimeters
Α	3.9	10.03
В	15.0	38.0
С	3.1	7.93
D	23.6	60.0
E	11	27.9

Specifications

Capacity:

0-22 lb x 0.2 oz (0-10 kg x 5 g) 22-44 lb x 0.5 oz (10-20 kg x 10 g)

Four AA alkaline batteries (included) or AC adaptor (included)

Battery Type:

Four AA alkaline (included)

Approvals:

AC adaptor: UL and C-UL

Warranty:

Two-year limited warranty




Standard Features


- Large 1- inch LCD display
- Dual-range capacity for increased precision from 0-22 lb
- · Accuracy within five grams
- · Unit of measure locking
- · Recall function to view last weight
- Automatic shut-off for long battery life
- Built-in measuring tape 0-22.5 in (0-57 cm)
- · Optional carrying case

Part Number/Price

Part #	Model #	Capacity	Price
155922	RL-DBS-2	$0-22 \text{ lb} \times 0.2 \text{ oz}, 22-44 \text{ lb} \times 0.5 \text{ oz}$ $(0-10 \text{ kg} \times 5 \text{ g}, 10-20 \text{ kg} \times 10 \text{ g})$ includes 120 VAC adaptor	\$171.00
155923	RL-DBS-02	0-22 lb × 0.2 oz, 22-44 lb × 0.5 oz (0-10 kg × 5 g, 10-20 kg × 10 g) includes 230 VAC adaptor	\$171.00







Dimensions

	Inches	Centimeters
Α	3.9	10.03
В	15.0	38.0
С	3.1	7.93
D	23.6	60.0
E	11	27.9

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
155922	RL-DBS-2 120V	28	18	6	10	22	22
155923	RI -DBS-2 230V	28	18	6	10	22	22

Options/Accessories

Part #	Description	Price
112570	Carrying Case	\$56.00
158463	Growth Chart, Birth to 36 months, Boy, contains 100 sheets	\$26.00
158464	Growth Chart, Birth to 36 months, Girl, contains 100 sheets	\$25.00
158465	Growth Chart, 2-20 years Boy, contains 100 sheets	\$26.00
158466	Growth Chart, 2-20 years Girl, contains 100 sheets	\$26.00



Optional Growth Charts

Optional Transport/Carrying Case

D400 Adult and Child Scale



Specifications

Capacity:
No tare entered:
0-100 lb x 0.1 lb; 100-440 lb x 0.2 lb
Tare entered: 0-100 lb x 2 oz; 100-400 lb x 4 oz Metric: 0-50 kg x 0.05 kg; 50-200 kg x 0.1 kg

Power:

Four AA alkaline batteries (included) or AC adaptor (included)

Battery Type:

Four AA alkaline (included)

Warranty:

One-year limited warranty

Standard Features

- · Large, stable scale base
- · LCD display
- Standard or Adult and Child weighing mode
- Tap to turn on
- · Auto power-off ensures long battery life
- Master power switch to prevent power-on during transport
- . Units of measure: lb, kg
- · Scale capacity switches from pounds to ounces when tare function for adult weight is used
- · Optional carrying case

Part Number/Price

Part #	Model #	Capacity	Price
157108	D400	440 lb (220 kg)	\$132.00

Shipping Weight


Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
157108	D400	17	15	6	9	12	12

Options/Accessories

Part #	Description	Price
107445	Carrying case	\$92.00



Optional Transport/Carrying Case



	Inches	Centimeters
Α	12.68	32.2
В	12.68	32.2
С	1.97	5.0

Specifications

Capacity:

0-10 lb x 0.05 oz (0-5 kg x 1 g) 10-33 lb x 0.1 oz (5-15 kg x 2 g)

Power:

12 VDC, provided by six AA lithium batteries (included) or AC adaptor (optional)

Battery Type:

Six Li-FeS2 batteries

Operating Temperature: 50° F to 95° F (10 $^{\circ}$ C to 35° C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met E113986

Warranty:

Two-year limited warranty



Standard Features

- Large, easy-to-read, 0.75- in LCD display
- Dual-range capacity for increased precision from 0-10 lb
- · Unit of measure locking
- · Automatic shut-off for long battery life
- Motiontrap[™] movement compensation technology
- Built-in measuring tape 0-23.5 in x 0.125 in (0-60 cm x 0.25 cm)

Part Number/Price


Part #	Model #	Capacity	Price
161784	650-10-1	0-10 lb \times 0.05 oz, 10-33 lb \times 0.1 oz (0-5 kg \times 1 g, 5-15 kg \times 2 g) 120V/230V	\$950.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
161784	650-10-1	18	28	11	25	40	40

Options/Accessories

Part #	Description	Price
165138	AC adaptor, input voltage 100-240V, c-Met, medical grade	\$55.00



	Inches	Centimeters
Α	24	60.8
В	19	48.2
С	6.75	17.1
D	17	43.2

RL-PMM Pediatric Measuring Mat



Standard Features

- Graduations in inches and centimeters along both edges for easy viewing (PN 180124)
- Graduations in centimeters along both edges for easy viewing (PN 182999)
- · Washable surface
- Fixed head positioner with sliding foot piece
- · Soft, flexible, latex free material
- · Head positioner and foot piece designed with rounded edges for safety
- · Carry handle and lightweight design for easy portability

Part Number/Price

Part #	Model #	Capacity	Est. Weight	Price
180124	RL-PMM-10	4 in - 39 in (20 cm - 99 cm) measuring range 1/4 in (5 mm) graduation	2 lb	\$41.00
182999	RL-PMM-20	20 cm - 99 cm measuring range 5 mm graduation	2 lb	\$41.00

RL-PCT-10 Pediatric Circumference Tape



Standard Features

- Button to make tape retract around measurement surface for accurate body measurements
- Easy to read measurements, inches on one side centimeters on the other side
- · Compact and portable

Part Number/Price

	Part #	Model #	Measuring Range	Est. Weight	Price
\ [186608	RL-PCT-10	0-205 cm x 1 mm; 0-80 in x 1/8 in	1 lb	\$6.00

260-10-1 Bariatric Handrail Scale

Specifications

Capacity:

800 lb x 0.2 lb (360 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 24 in x 24 in x 2.75 in

Height Rod Dimensions:

30-83.125 in (77-211 cm)

Power

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Operating Temperature:


50° F to 104° F (10° C to 40° C)

Warranty:

Two-year limited warranty



Shown with optional height rod





Standard Features

- · Handrail for support and safety
- · Two wheels for ease of portability
- Large 1-inch LCD display
- Non- skid platform
- · Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- · EHR capable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- · Optional height rod can be installed on-site

Part Number/Price

Part #	Model #	Capacity	Price
170139	260-10-1	800 lb x 0.2 lb (360 kg x 0.1 kg) with USB	\$1,150.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
170139	260-10-1	40	40	10	58	116	116
172958	Height Rod	33	9	3	3	7	7

Options/Accessories

Part #	Description	Price
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ††	9 VDC adaptor, 230 V	\$30.00
172958	Height rod 30-83 in (77-210 cm)	\$75.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00





† NEMA 1-15 Plug

	Inches	Centimeters		Inches	Centimeters
Α	24	61	D	25.5	65
В	24	61	E	33.5	85
С	2.75	7	F	43	109

250-10-2 Bariatric Handrail Scale



Standard Features

- · Handrail for support and safety
- · Two wheels for ease of portability
- Large 1-inch LCD display
- · Non-skid platform
- · Unit of measure toggle or locking
- Motiontrap[™] movement compensation technology
- · EHR capable
- USB, Bluetooth 2.0, or BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

Part Number/Price

Part #	Model #	Capacity	Price
133119	250-10-2	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,260.00
194733	250-10-2BLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg) Bluetooth® BLE 4.0	\$1,495.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
133119	250-10-2	45	29	9	66	85	85
194733	250-10-2BLE	45	29	9	66	85	85

Options/Accessories

Part #	Description	Price
115655 †	9 VDC adaptor, 120 V/230 V auto switching c-MET medical grade power supply	\$43.00
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ††	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00





Specifications

Capacity: 1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 20 in x 25 in x 3 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature: 50° F to 104° F (10° C to 40° C)


Display: 5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty



	Inches	Centimeters
Α	20	50.8
В	25	63.5
С	3	7.6
D	25	63.5
E	34	86.4
F	44.5	113

250-10-4 Bariatric Handrail Scale

Specifications

Capacity: 1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 20 in x 25 in x 3 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display:


5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty



Dimensions

	Inches	Centimeters
Α	2.8	7
В	25.7	65.3
С	25.2	64
D	21.6	54.9
E	32	81.1
F	47.5	120.7
G	20	50.8
Н	12	30.5



Standard Features

- · Handrail for support and safety
- · Folding seat
- Two wheels for ease of portability
- · Large 1-inch LCD display
- · Non-skid platform
- · Unit of measure toggle or locking
- Motiontrap[™] movement compensation technology
- · EHR capable
- USB, Bluetooth 2.0, or BLE 4.0 available, part number selectable
- Tare function
- Hold function
- · BMI (body mass index) function
- · Factory calibrated

Part Number/Price

Part #	Model #	Capacity	Price
133120	250-10-4	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,990.00
194734	250-10-4BLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg) Bluetooth® BLE 4.0	\$2,225.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
133120	250-10-4	32	27	46	70	286	286
194734	250-10-4BLE	32	27	46	70	286	286

Options/Accessories

Part #	Description	Price
115655 †	9 VDC adaptor, 120 V/230 V auto switching c-MET medical grade power supply	\$43.00
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ++	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00





861

RL-MCS Rice Lake Mechanical Chair Scale

16 Inch Wide Seat



Specifications

Capacity: Lb only beam 440 lb x 4 oz Kg only beam 200 kg x 100 g

Warranty: Two-year limited warranty

Standard Features

- Capacity: Lb only beam 440 lb x 4 oz; kg only beam 200 kg x 100 g
- Swing-up arms for easy access and exit
- Fold up footrest
- · Sturdy enameled, steel frame
- Dual read die cast beam
- Polypropylene seat with ABS armrest
- · Heavy duty wheels two back wheels lock, two front wheels swivel

Part Number/Price


Part #	Model #	Capacity	Price
172098	RL-MCS-LB	450 lb x 4 oz	\$600.00
172099	RL-MCS-KG	200 kg x 100 g	\$600.00


Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
172098	RL-MCS-LB	29	25	25	79	131	131
172099	RL-MCS-KG	29	25	25	79	131	131



Model RL-MCS-LB





	Inches	Centimeters
Α	21.5	54.6
В	14.2	36.1
С	14.8	37.6
D	16	40.6
E	35.7	90.7
F	38.4	97.5

560-10-1 Digital Chair Scale

20 Inch Wide Seat

Specifications

Capacity: 660 lb x 0.2 lb (300 kg x 0.1 kg)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Power:

9 VDC provided by six AA alkaline batteries (included) or 120 V/230 VAC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Warranty:

Two-year limited warranty







Standard Features

- · Enameled tubular steel frame
- · Four heavy-duty caster wheels (rear wheels locking)
- · Swing-up arms
- · Side-folding footrests
- · Molded seat
- · Large 1-inch LCD display
- · Unit of measure toggle or locking
- Motiontrap[™] movement compensation technology
- EHR capable
- Tare function
- Hold function
- · BMI (body mass index) function
- Factory calibrated

Part Number/Price

Part #	Model #	Capacity	Price
166644	560-10-1	660 lb x 0.2 lb (300 kg x 0.1 kg)	\$1,150.00

Shipping Weight


Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
166644	560-10-1	33	23	27	65	148	148


Options/Accessories

Part #	Description	Price
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ++	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00









	Inches	Centimeters
Α	20.1	51.1
В	17.3	44.0
С	20.1	51.1
D	36.4	92.5
E	5.9	15.0
F	42.9	109.0
G	34.6	88.0

550-10-1 Digital Chair Scale 17 Inch Wide Seat



Standard Features

- Enameled tubular steel frame
- · Four heavy-duty locking caster wheels
- · Swing-up arms
- · Flip-up footrest
- · Large 1-inch LCD display
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- · EHR capable
- USB, Bluetooth 2.0, or BLE 4.0 available, part number selectable
- Tare function
- · Hold function
- · BMI (body mass index) function
- · Factory calibrated

Part Number/Price

Part #	Model #	Capacity	Price
119114	550-10-1	660 lb x 0.2 lb (300 kg x 0.1 kg) with USB	\$1,100.00
194740	550-10-1BLE	660 lb x 0.2 lb (300 kg x 0.1 kg) with Bluetooth® BLE 4.0	\$1,335.00

Shipping Weight

	Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
	119114	550-10-1	29	27	30	56	169	169
Γ	194740	550-10-1BLE	29	27	29	54	164	164

Options/Accessories

Part #	Description	Price
115655 <i>†</i>	9 VDC adaptor, 120 V/230 V auto switching c-MET medical grade power supply	\$43.00
133077 /	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ++	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00







Power:

9 VDC provided by six AA alkaline batteries (included) or 120 V/230 VAC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

5-digit LCD display, 0.75 in (1.9 cm) digit height


Operating Temperature: 50° F to 104° F (10° C to 40° C)

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty



	Inches	Centimeters
Α	37.4	95
ВС	33.4	85
	25.2	64
D	20.5	52
E	17	43.2
D E F	16	40.6
G	17	43.2

Specifications

Capacity:D300-8: 800 lb x 0.5 lb (363 kg x 0.2 kg)

Power:

Wheel pads: Eight EL-123 batteries per scale system (two per pad) (included) Controller: Three AAA lithium batteries (included)

Operating Temperature:

50° F to 90° F (10° C to 32° C)

Warranty:

Two-year limited warranty





Optional transport/carrying case



Wheelchair positioned on pads

Standard Features

- Four lightweight, wireless scale pads
- Powder-coated molded plastic and cast aluminum construction
- Four wheel-stops and roll-up ramps
- · Handheld controller
- · Rubber controller glove and lanyard
- · Optional carrying case

Part Number/Price

Part #	Model #	Capacity	Price
157141	D300-8	800 lb x 0.5 lb (363 kg x 0.2 kg)	\$2,832.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
157141	D300-8	17	13	13	15	21	21

Options/Accessories

Part #	Description	Price
107445	Carrying Case	\$92.00



350-10-3M Dual-ramp Wheelchair Scale

Metal Platform



Standard Features

- Two wheels for portability
- Dual ramp
- Non-slip platform
- · Large 1-inch LCD display
- Motiontrap™ movement compensation technology
- · Unit of measure toggle or locking
- · EHR capable
- USB, Bluetooth 2.0, or BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- Easy to store, folded depth is 11.75 in

Part Number/Price

Part #	Model #	Capacity	Price
193956	350-10-3M	1,000 lb x 0.2 lb (450 kg x 0.1 kg)	\$2,125.00
203910	350-10-3MBLE	1,000lb x 0.2lb (450kg x 0.1kg)	\$2,360.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
193956	350-10-3M	51	42	14	102	216	216
203910	350-10-3MBLE	51	42	14	102	216	216

Options/Accessories

Part #	Description	Price
115655 <i>†</i>	9 VDC adaptor, 120 V/230 V auto switching c-MET medical grade power supply	\$43.00
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ++	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00





Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 31.5 in x 29.5 in x 3.15 in

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type: Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:


c-Met, E113986

Warranty:

Two-year limited warranty



Wheelchair scale in folded position



	Inches	Centimeters
Α	3.15	8.0
В	47.7	121.2
С	37.8	96
D	45.3	115.1
E	31.5	80
F	29.5	74.9
G	2.4	6.1
Н	27.2	69.1

350-10-2 Single-Ramp Wheelchair Scale

with Handrail

Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps:

(W x L x H) 32 in x 29.5 in x 2.375 in

Power

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:


c-Met, E113986

Warranty:

Two-year limited warranty



Wheelchair scale in folded position



Dimensions

	Inches	Centimeters
Α	29.5	74.9
B C	32	81.3
С	2.4	6.1
D	9.25	23.5
Е	37.5	95.3
F	45	114.3



Standard Features

- · Two wheels for portability
- · Single ramp
- · Non-slip platform
- · Large 1-inch LCD display
- Motiontrap[™] (movement compensation technology)
- · Unit of measure toggle or locking
- · EHR capable
- USB, Bluetooth 2.0, or BLE 4.0 available, part number selectable
- Tare function
- Hold function
- · BMI (body mass index) function
- Factory calibrated
- Easy to store, folded depth is 11.75 in

Part Number/Price

Part #	Model #	Capacity	Price
141445	350-10-2	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,260.00
194739	350-10-2BLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with Bluetooth® BLE 4.0	\$1,495.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
141445	350-10-2	42	41	14	90	174	174
194739	350-10-2BLE	42	41	14	90	174	174

Options/Accessories

Part #	Description	Price
115655 †	9 VDC adaptor, 120 V/230 V auto switching c-MET medical grade power supply	\$43.00
133077 +	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ++	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00





350-10-7 Single-ramp Wheelchair Platform Scale



Standard Features

- · Two wheels for portability
- · Single ramp
- Non-slip platform
- Large 1-inch LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- · EHR capable
- USB, Bluetooth 2.0, or BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- · Factory calibrated

Part Number/Price

Part #	Model #	Capacity	Price
141446	350-10-7	1,000 x 0.2 lb (450 x 0.1 kg) with USB	\$1,200.00
194738	350-10-7BLE	1,000 x 0.2 lb (450 x 0.1 kg) with Bluetooth® BLE 4.0	\$1,435.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
141446	350-10-7	45	44	7	78	100	100
194738	350-10-7BLE	45	44	7	78	100	100

Options/Accessories

Part #	Description	Price
115655 †	9 VDC adaptor, 120 V/230 V auto switching c-MET medical grade power supply	\$43.00
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ††	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00





Specifications

Capacity: 1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps:

(W x L x H) 32 in x 29.5 in x 2.375 in

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)


Display: 5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty



	Inches	Centimeters
Α	29.5	74.9
В	32	81.3
С	2.4	6.1
D	9.25	23.5
E	37.5	95.3

350-10-3 Dual-ramp Wheelchair Scale

with Handrail

Specifications

Capacity: 1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 32 in x 29.5 in x 2.375 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:


c-Met, E113986

Warranty:

Two-year limited warranty



Wheelchair scale in folded position



Dimensions

	Inches	Centimeters
Α	48.5	123.2
B C	32	81.3
С	2.4	6.1
D	9.3	23.6
E	38	96.5
F	45	114.3



Standard Features

- · Two wheels for portability
- Dual ramp
- · Non-slip platform
- Large 1-inch LCD display
- Motiontrap™ movement compensation technology
- · Unit of measure toggle or locking
- EHR capable
- USB, Bluetooth 2.0, or BLE 4.0 available, part number selectable
- · Tare function
- Hold function
- · BMI (body mass index) function
- Factory calibrated
- . Easy to store, folded depth is 11.75 in

Part Number/Price

Part #	Model #	Capacity	Price
141447	350-10-3	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,930.00
194736	350-10-3BLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with Bluetooth® BLE 4.0	\$2,165.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
141447	350-10-3	51	42	14	102	216	216
194736	350-10-3BLE	51	42	14	102	216	216

Options/Accessories

Part #	Description	Price
115655 <i>†</i>	9 VDC adaptor, 120 V/230 V auto switching c-MET medical grade power supply	\$43.00
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ++	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00





†† CEE 7/16 Plug

350-10-4 Dual-ramp Wheelchair Scale

With Seat and Handrail



Standard Features

- · Two wheels for portability
- Dual ramp
- Non-slip platform
- Fold-away padded seat with backrest
- Large 1-inch LCD display
- Motiontrap[™] movement compensation technology
- · Unit of measure toggle or locking
- EHR capable
- USB, Bluetooth 2.0, or BLE 4.0 available, part number selectable
- Tare function
- Hold function
- · BMI (body mass index) function
- · Factory calibrated
- Easy to store, folded depth is 11.75 in

Part Number/Price

Part #	Model #	Capacity	Price
141448	350-10-4	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$2,775.00
194737	350-10-4BLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with Bluetooth® BLE 4.0	\$3,010.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
141448	350-10-4	51	43	21	132	332	332
194737	350-10-4BLE	51	43	21	132	332	332

Options/Accessories

Part #	Description	Price
115655 <i>†</i>	9 VDC adaptor, 120 V/230 V auto switching c-MET medical grade power supply	\$43.00
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ++	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00





† NEMA 1-15 Plug

†† CEE 7/16 Plug

Specifications

Capacity: 1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 32 in x 29.5 in x 2.375 in

Chair Dimensions:

(W x D) 12 in x 6.25 in

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:


50° F to 104° F (10° C to 40° C)

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty



	Inches	Centimeters
Α	48.5	123.2
В	32	81.3
С	2.4	6.1
D	9.3	23.6
Е	38	96.5
F	45	114.3
G	6.3	16
Н	12	30.5

Specifications

Capacity: 1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions Without Ramps:

(W x L x H) 35 in x 29.5 in x 2.375 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited warranty



Standard Features

- · Two wheels for portability
- · Dual ramp
- Non-slip platform
- Large 1-inch LCD display
- Motiontrap[™] movement compensation technology
- · Unit of measure toggle or locking
- EHR capable
- USB, Bluetooth 2.0, or BLE 4.0 available, part number selectable
- Tare function
- Hold function
- · BMI (body mass index) function
- Factory calibrated

Part Number/Price

Part #	Model #	Capacity	Price
141449	350-10-8	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,895.00
194735	350-10-8BLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with Bluetooth® BLE 4.0	\$2,130.00

Shipping Weight

Par	t #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
141	449	350-10-8	53	45	7	86	121	121
194	735	350-10-8BLE	53	45	7	86	121	121


Options/Accessories

Part #	Description	Price
115655 <i>†</i>	9 VDC adaptor, 120 V/230 V auto switching c-MET medical grade power supply	\$43.00
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ++	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00



† NEMA 1-15 Plug






	Inches	Centimeters
Α	48.5	123.2
В	32	81.3
С	2.4	6.1
D	9.3	23.6
Е	38	96.5

RL-350-5 Single-ramp Portable Bariatric Wheelchair Scale

34 Inches Wide

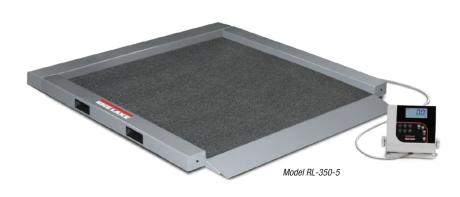

Specifications

Capacity: 1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 34 in x 34 in x 2.22 in

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display: 5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met (pending)

Warranty:

Two-year limited warranty

Standard Features

- · Integrated handles and wheels for easy transport
- Single ramp
- · Large, stable scale base
- · Large 1-inch LCD display
- · Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EHR capable
- · Tare function
- . BMI (body mass index) function
- Hold function
- 10 ft cable between scale base and indicator

Part Number/Price

Part #	Model #	Capacity	Price
150703	RL-350-5	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,850.00
205976	RL-350-5BLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with Bluetooth® BLE 4.0	\$2,085.00

Shipping Weight


Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
150703	RL-350-5	43	43	11	162	147	162
205976	RL-350-5BLE	43	43	11	162	147	162

Options/Accessories

Part #	Description	Price
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ††	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00







	Inches	Centimeters
Α	41	104.1
В	40	101.6
С	2.2	5.6
D	34	86.4
Е	34	86.4

Specifications

Capacity: 1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 34 in x 34 in x 2.22 in

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display:


5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met (pending)

Warranty:

Two-year limited warranty

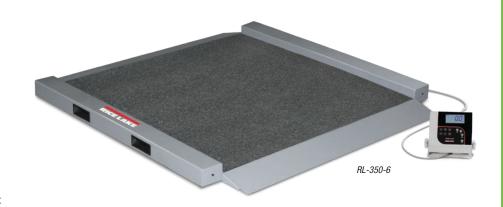

Standard Features

- · Integrated handles and wheels for easy transport
- Dual ramp
- · Large, stable scale base
- Large 1-inch LCD display
- · Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- · EHR capable
- · Tare function
- . BMI (body mass index) function
- Hold function
- . 10 ft cable between scale base and indicator

Part Number/Price


Part #	Model #	Capacity	Price
150704	RL-350-6	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,850.00
205974	RL-350-6BLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with Bluetooth® BLE 4.0	\$2,085.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
150704	RL-350-6	43	43	11	154	147	154
205974	RI -350-6BI F	43	43	11	154	147	154

Options/Accessories

Part #	Description	Price
133077 /	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ++	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00



	Inches	Centimeters
Α	41	104.1
ВС	40	101.6
С	2.2	5.6
D	34	86.4
Е	34	86.4







Standard Features

- · Heavy-duty mild steel construction
- Single ramp
- · Large 1-inch LCD display
- · Unit of measure toggle or locking
- Motiontrap[™] movement compensation technology
- EHR capable
- Tare function
- Hold function
- · BMI (body mass index) function
- · Factory calibrated
- 10 ft cable between scale base and display

Part Number/Price

Part #	Model #	Capacity	Price
150706	SB-1150	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,695.00
205977	SB-1150BLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with Bluetooth® BLE 4.0	\$1,930.00

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
150706	SB-1150	49	48	24	363	407	407
205977	SB-1150BLE	49	48	24	363	407	407

Options/Accessories

Part #	Description	Price
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ++	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00







Specifications

Capacity: 1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 36 in x 36 in x 4 in

Ramp Dimensions:

(W x L x H) 36 in x 28.5 in x 4 in

5-digit LCD display, 0.75 in (1.9 mm) digit height

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:


50° F to 104° F (14° C to 40° C)

Warranty:

Two-year limited warranty

Approvals:

c-Met (pending)



	Inches	Centimeters
Α	36	91.4
В	36	91.4
C	28.5	72.4
D	36	91.4
E	4	10.2
F	1	2.5

SD-1150-WP Dialysis Wheelchair Scale

Specifications

Capacity:

1,000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimensions:

(W x L x H) 36 in x 36 in x 3 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adaptor (optional)

Battery Type:

Six AA alkaline

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature:

50° F to 104° F (10° C to 40° C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Warranty:

Two-year limited warranty

Approvals:

c-Met (pending)



Model SD-1150-WP

Standard Features

- · Package includes scale, pit frame, handrail and indicator
- · Heavy-duty mild steel construction
- · Handrail for added patient safety
- · Large 1-inch LCD display
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EHR capable
- · Tare function
- · Hold function
- BMI (body mass index) function
- Factory calibrated

Part Number/Price

Part #	Model #	Capacity	Price
150707	SD-1150-WP	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with USB	\$1,960.00
205978	SD-1150-WPBLE	1,000 lb x 0.2 lb (450 kg x 0.1 kg) with Bluetooth® BLE 4.0	\$2,195.00

Shipping Weight


Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
150707	SD-1150-WP	40	39	15	246	169	246
205978	SD-1150-WPBLE	40	39	15	246	169	246

Options/Accessories

Part #	Description	Price
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ++	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00









	Inches	Centimeters
Α	36	91.4
В	36	91.4
С	3	7.6
D	31.5	80.0
E	37	94.0

Wheelchair Scales

Pit Frame Concrete Details

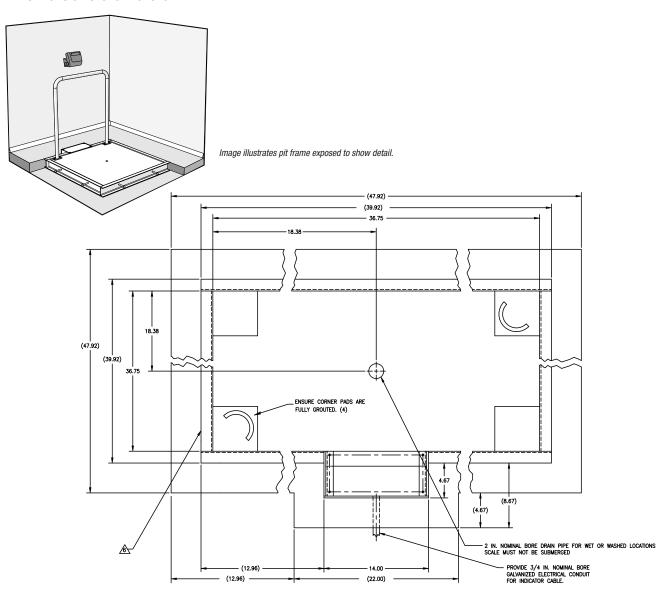

NOTE: HANDRAIL ON SCALE WILL MOUNT ON SAME SIDE AS JUNCTION BOX POCKET

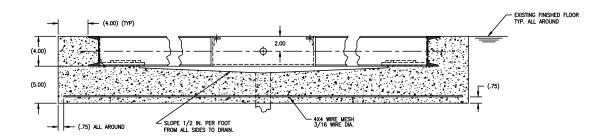

NOTE:

- 1. USE CONCRETE OF MINIMUM YIELD STRENGTH 5000 PSI OR 6-BAG MIX.
- 2. ALLOW 7 DAYS TO CURE. WET CONCRETE PERIODICALLY DURING THIS TIME.
- 3. DIMENSIONS SHOWN ASSUME FIRM, STABLE SOIL CONDITIONS. WHEN SOIL CONDITIONS ARE NOT ADEQUATE, PLACE FOUNDATION AT SUFFICIENT DEPTH.
- IN WET OR WASHDOWN APPLICATIONS WE RECOMMEND THE USE OF HERMETICALLY SEALED LOAD CELLS, AND THAT THE JUNCTION BOX BE MOUNTED REMOTELY IN A DRY LOCATION.
- 5. WIRE MESH TO HAVE MINIMUM .75 COVER BOTTOM AND SIDES.
- 6 ON STAINLESS STEEL VERSIONS, TWO PIECES OF 2 INCH ANGLE WILL BE SUBSTITUTED FOR THE 4 INCH CHANNEL.

Specifications

Capacity

1000 lb x 0.2 lb (450 kg x 0.1 kg)

Platform Dimension without Ramps (W x L x H) 32.7 in x 49.3 in x 2.4 in

Dimensions with Wheels and Ramps

(W x L x H) 34.2 in x 63.7 in x 3.7 in

Power

9VDC output provided by six AA batteries (included) 230v/120v input provided by AC adapter (optional)

Battery Type

Six AA alkaline (included)

Battery Use

25 hours continuous use with batteries. Automatic power-off can be configured

Operating Temperature

50° F to 104° F (10° C to 40° C)

Display

5-digit LCD display, 0.75 in (1.9 cm) digit height

Warranty

Two-year limited warranty



Standard Features

- Two wheels for portability
- · Dual ramp
- Non-slip platform
- · Safety side rails
- · Push-button LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- · EHR capable
- USB or Bluetooth BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- 7 ft cable between scale base and display

Part Number/Price

Part #	Model #	Capacity	Price
203622	350-10-8S	$1,000 \text{lb} \times 0.2 \text{lb} \ (450 \text{kg} \times 0.1 \text{kg}) \ \text{with USB}$	\$2,050.00
203623	350-10-8SBLE	1,000 lb × 0.2 lb (450 kg × 0.1 kg) with Bluetooth® BLE 4.0	\$2,056.00

Shipping Weight


Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
203622	350-10-8S	67.2	36	6	154	104	154
203623	350-10-8SBLE	67.2	36	6	154	104	154

Options/Accessories

Part #	Description	Price
133077 †	9 VDC adaptor, 120 V/230V auto switching	\$25.00
102508 ††	9 VDC adaptor, 230 V	\$30.00
81076	Epson TM-U220 tape printer	\$420.00
186830	Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	\$65.00







	Inches	Centimeters
Α	63.8	162
В	49.3	125.3
С	32.7	83.1
D	32.7	83
E	3.9	9.8
F	2.6	6.7

Over 40,000 weighing products and 3 million parts distributed worldwide.

An ISO 9001 registered company



Extended Business Hours

Monday through Friday from 6:30 a.m. to 6:30 p.m. Saturday from 8:00 a.m. to 12:00 p.m. Central Time

Emergency contact information

Your service doesn't stop when the office is closed and neither does ours. Simply call 800-472-6703 and press 1 to reach on-call personnel outside of our normal business hours.



CORPORATE OFFICE

230 W. Coleman Street, Rice Lake, WI 54868 • USA USA: 800-472-6703 Canada/Mexico: 800-321-6703 Direct: 715-234-9171 Fax: 715-234-6967