

Limited Stock Available

DOUBLE-ENDED BEAM

RL75016

Alloy Steel, Environmentally Sealed, IP67



Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
1,500 lb	17302	4 lb	Consult
15,000 lb	17313	7 lb	Consult

Dimensions

Rated Capacity	A1	A2	C	D	E	F
lb/in						
1,500	0.50	1.25	1.25	1.25	7.50	6.25
15,000	0.81	1.99	1.44	1.94	8.75	7.50

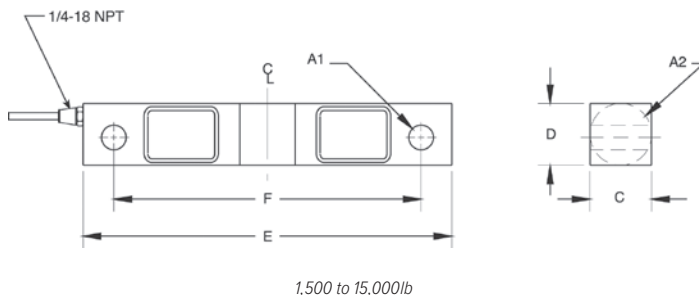

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL77032.....page 128

VPG® CELTRON®

DSR.....page 195

VPG® SENSORTRONICS®

65016.....page 290

VPG® REVERE

5203

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

RL1600 Series.....page 66

Specifications

Full Scale Output:

3.0 mV/V

Output Resistance:

700 (± 5) ohm

Input Resistance:

770 (± 10) ohm

Material/Finish:

High-alloy steel, nickel plated

Temperature:

Operating:
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Nonlinearity:

0.03% full scale

Hysteresis:

0.02% full scale

Insulation Resistance:

5,000 megohm

Deflection at Capacity:

1,500 lb: 0.01 in
15,000 to 20,000 lb: 0.022 in

Cable Length:

25 ft

Cable Diameter:

0.200 in
Polyurethane jacket

Cable Color Code:

Red +Excitation
Black -Excitation
Green +Signal
White -Signal

Warranty:

Two-year limited

Approvals:

cFMus

**RICE LAKE
LOAD CELLS**