



Picture is a representation of actual product

Approvals



Available upon request



Available upon request

Order Information

Load Rating	Part #	Est. Weight	Price
NTEP Certified, 10 ft Cable			
50 kg	17478	6 lb	Consult
75 kg	17469	6 lb	Consult
100 kg	33711	6 lb	Consult
150 kg	33712	6 lb	Consult
200 kg	33713	6 lb	Consult
250 kg	33714	6 lb	Consult
300 kg	33715	6 lb	Consult
500 kg	33716	6 lb	Consult
635 kg	33717	6 lb	Consult
1,000 kg	17480	6 lb	Consult
Non-NTEP Certified, 25 ft Cable			
50 kg	40944	6 lb	Consult
75 kg	40945	6 lb	Consult
100 kg	40946	6 lb	Consult
150 kg	32342	6 lb	Consult
200 kg	32341	6 lb	Consult
250 kg	40947	6 lb	Consult
300 kg	32340	6 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	G	H	J	K	M	N	P
kg/mm												
50 to 1,000	191.0	11.0	25.0	125.0	25.0	60.0	75.0	82.0	75.0	57.5	85.0	5/16-18 UNC x 15 DP

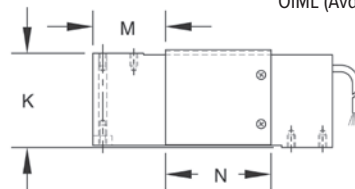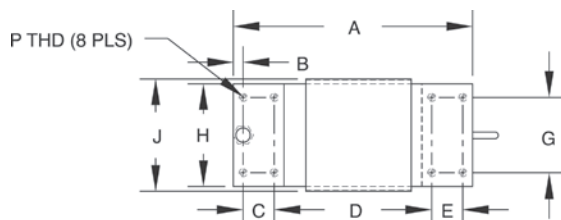

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS
RL1218A.....page 181

RICE LAKE WEIGHING SYSTEMS
RL1250

FLINTEC®
PCB*.....page 228

TRANSCELL®
FAY

*Stainless steel, hermetically sealed

Specifications

Full Scale Output:
2.0 mV/V

Bridge Resistance:
350 ohm, nominal

Material/Finish:
Anodized aluminum

Temperature:
Compensated range
14 °F to 104 °F (-10 °C to 40 °C)
Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:
Environmentally sealed, IP67

Safe Overload:
150% of full scale at center loading point

Rated Excitation:
5 to 10 VDC (15 V maximum)

Combined Error:
0.02% full scale

Insulation Resistance:
2,000 megohm

Deflection at Capacity:
0.015 in

Cable Length:
10 ft
25 ft

Cable Diameter:
0.200 in PVC jacket

Cable Color Code:
Green +Excitation
Black -Excitation
Red +Signal
White -Signal
Blue +Sense
Brown -Sense

Max Platform size:
50 to 500 kg: 800 × 800 mm
635 to 1,000 kg: 600 × 600 mm

Warranty:
One-year limited

Approvals:
cFMus
NTEP
Ex (Available upon request)
OIML (Available upon request)

VPG
TEDEA-HUNTLEIGH