



Picture is a representation of actual product

Approvals



Available
upon
request


Available
upon
request

Order Information

Load Rating	Part #	Est. Weight	Price
NTEP Certified, 10 ft Cable			
50 kg	17478	6 lb	Consult
75 kg	17469	6 lb	Consult
100 kg	33711	6 lb	Consult
150 kg	33712	6 lb	Consult
200 kg	33713	6 lb	Consult
250 kg	33714	6 lb	Consult
300 kg	33715	6 lb	Consult
500 kg	33716	6 lb	Consult
635 kg	33717	6 lb	Consult
1,000 kg	17480	6 lb	Consult
Non-NTEP Certified, 25 ft Cable			
50 kg	40944	6 lb	Consult
75 kg	40945	6 lb	Consult
100 kg	40946	6 lb	Consult
150 kg	32342	6 lb	Consult
200 kg	32341	6 lb	Consult
250 kg	40947	6 lb	Consult
300 kg	32340	6 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	G	H	J	K	M	N	P
kg/mm												
50 to 1,000	191.0	11.0	25.0	125.0	25.0	60.0	75.0	82.0	75.0	57.5	85.0	5/16-18 UNC × 15 DP

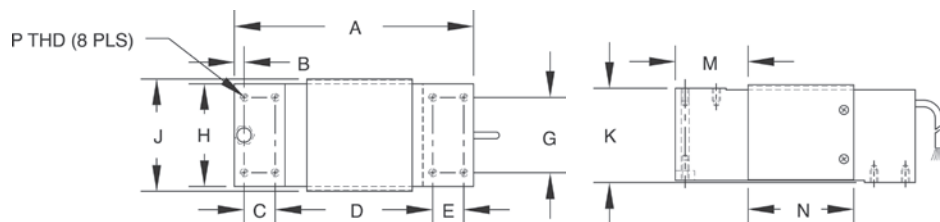

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL1218A.....page 168

RICE LAKE WEIGHING SYSTEMS

RL1250

FLINTEC®

PCB*page 214

TRANSCELL®

FAY

*Stainless steel, hermetically sealed

Specifications

Full Scale Output:

2.0 mV/V

Bridge Resistance:

350 ohm, nominal

Material/Finish:

Anodized aluminum

Temperature:

Compensated:

14 °F to 104 °F (-10 °C to 40 °C)

Operating:

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% of full scale at center loading point

Safe Overload:

150% of full scale at center loading point

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Insulation Resistance:

2,000 megohm

Deflection at Capacity:

0.015 in

Cable Length:

10 ft

25 ft

Cable Diameter:

0.200 in

PVC jacket

Cable Color Code:

Green +Excitation

Black -Excitation

Red +Signal

White -Signal

Blue +Sense

Brown -Sense

Max Platform Size:

50 to 500 kg: 800 × 800 mm

635 to 1,000 kg: 600 × 600 mm

Warranty:

One-year limited

Approvals:

NTEP

OIML (Available upon request)

cFMus

Ex (Available upon request)