

# Health Scales

## TABLE OF CONTENTS

<b>Health Scales</b> .....	<b>453</b>	<b>250-10-4</b> .....	<b>474</b>
<b>RL-330HHD</b> .....	<b>454</b>	<i>Bariatric Handrail Scale</i>	
<i>Dial Home Health Scale</i>		<b>RL-MCS</b> .....	<b>475</b>
<b>DHH-10</b> .....	<b>455</b>	<i>Mechanical Chair Scale</i>	
<i>Digital Home Health Scale</i>		<b>560-10-1</b> .....	<b>476</b>
<b>RL-MPS</b> .....	<b>456</b>	<i>Digital Chair Scale</i>	
<i>Mechanical Physician Scale</i>		<b>550-10-1</b> .....	<b>477</b>
<b>RL-MPS-10</b> .....	<b>457</b>	<i>Digital Chair Scale</i>	
<i>Mechanical Physician Scale</i>		<b>350-10-3M</b> .....	<b>478</b>
<b>RL-MPS-30</b> .....	<b>458</b>	<i>Dual-ramp Wheelchair Scale</i>	
<i>Mechanical Physician Scale</i>		<b>350-10-2</b> .....	<b>479</b>
<b>RL-MPS-40</b> .....	<b>459</b>	<i>Single-ramp Wheelchair Scale</i>	
<i>Mechanical Physician Scale</i>		<b>350-10-7</b> .....	<b>480</b>
<b>RL-MPS-50</b> .....	<b>460</b>	<i>Single-ramp Wheelchair Platform Scale</i>	
<i>Mechanical Physician Scale</i>		<b>350-10-3</b> .....	<b>481</b>
<b>150-10-5</b> .....	<b>461</b>	<i>Dual-ramp Wheelchair Scale</i>	
<i>Digital Physician Scale</i>		<b>350-10-4</b> .....	<b>482</b>
<b>150-10-6</b> .....	<b>462</b>	<i>Dual-ramp Wheelchair Scale</i>	
<i>Digital Physician Scale</i>		<b>350-10-8</b> .....	<b>483</b>
<b>150-10-7</b> .....	<b>463</b>	<i>Dual-ramp Wheelchair Platform Scale</i>	
<i>Digital Physician Scale</i>		<b>RL-350-5</b> .....	<b>484</b>
<b>150-10-8</b> .....	<b>464</b>	<i>Single-ramp Portable Bariatric Wheelchair Scale</i>	
<i>Digital Physician Scale</i>		<b>RL-350-6</b> .....	<b>485</b>
<b>160-10-7N</b> .....	<b>465</b>	<i>Dual-ramp Portable Bariatric Wheelchair Scale</i>	
<i>Digital Athletic Low-profile Scale</i>		<b>SB-1150 Summit™</b> .....	<b>486</b>
<b>RL-WMS-10</b> .....	<b>466</b>	<i>Bariatric Wheelchair Scale</i>	
<i>Wall Mount Stadiometer</i>		<b>SD-1150-WP</b> .....	<b>487</b>
<b>RL-MIS</b> .....	<b>467</b>	<i>Dialysis Wheelchair Scale</i>	
<i>Mechanical Baby Scale</i>		<i>Pit Frame Concrete Details</i>	
<b>RL-MIS-20</b> .....	<b>468</b>	<b>350-10-8S</b> .....	<b>489</b>
<i>Mechanical Baby Scale</i>		<i>Digital Stretcher Scale</i>	
<b>RL-DBS</b> .....	<b>469</b>		
<i>Digital Baby Scale</i>			
<b>RL-DBS-2</b> .....	<b>470</b>		
<i>Digital Baby Scale</i>			
<b>650-10-1</b> .....	<b>471</b>		
<i>Neonatal Scale</i>			
<b>260-10-1</b> .....	<b>472</b>		
<i>Bariatric Handrail Scale</i>			
<b>250-10-2</b> .....	<b>473</b>		
<i>Bariatric Handrail Scale</i>			

Product names, logos, brands and other trademarks featured or referred to within this publication are the property of their respective trademark holders.

# RL-330HHD

Dial Home Health Scale

HEALTH SCALES



### Standard Features

- Durable steel base and platform
- Nonslip mat
- Large dial display
- Colorful markers to track weight values

### Specifications

**Capacity:**  
330 × 1 lb (150 × 0.5 kg)

**Warranty:**  
One-year limited

### Part Number/Price

Part #	Model #	Capacity	Price
113500	RL-330HHD	330 × 1 lb (150 × 0.5 kg) (lb and kg)	\$72.00


### Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
113500	RL-330HHD	19 × 12 × 5 in	9	9	9

### Dimensions

	Inches	Centimeters
A	11.20	28.5
B	16.90	43.0
C	2.50	6.4
D	7.90	20.1
E	0.39	8.3

E: (height includes plastic cover)

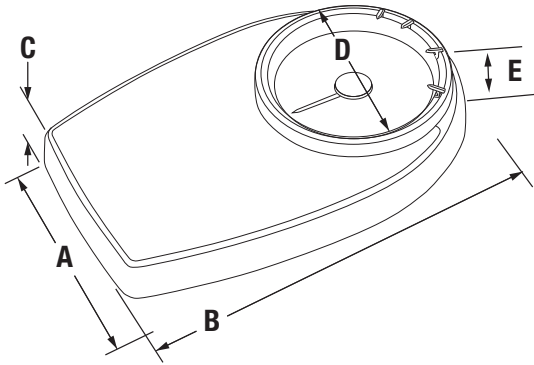



### Standard Features

- Large LCD display
- Display lb or kg
- 8 mm tempered safety glass weighing surface
- Low battery indication

### Specifications

#### Capacity:

440 × 0.2 lb (200 × 0.1 kg)

#### Dimensions:

(L × W × H)

11.8 × 15.4 × 1.0 in

#### Battery Type:

Two AAA alkaline batteries (included)

#### Display:

Digit size: 1.75 in

#### Warranty:

One-year limited

#### Approvals:

CE Approved

### Approvals



### Part Number/Price


Part #	Model #	Capacity	Price
201124	DHH-10	440 × 0.2 lb (200 × 0.1 kg)	\$72.00

### Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
Single Carton					
201124	DHH-10	17 × 13 × 2 in	6.5	3.0	6.5

### Dimensions

	Inches	Centimeters
A	15.40	39.0
B	11.80	30.0
C	1.00	2.5

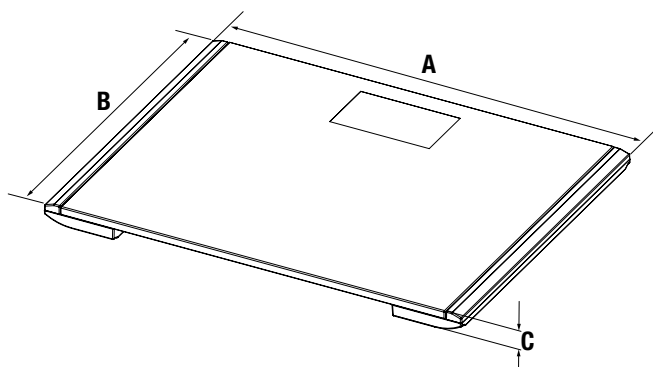

# RL-MPS

Mechanical Physician Scale

HEALTH SCALES



## Standard Features

- Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Two wheels for easy transport
- Easy operation with two sliding weights
- Removable slip-resistant scale base cover
- Aluminum height rod

## Specifications

### Capacity:

440 lb × 4 oz (200 kg × 100 g)

### Platform Dimensions:

(L × W × H)

14.75 × 10.75 × 4.13 in

### Height Rod:

Measures 24 to 84 in  
(60 to 212 cm)

### Height Division:

0.125 in (0.1 cm)

### Warranty:


Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
102613	RL-MPS	440 lb × 4 oz (200 kg × 100 g)	\$380.00

## Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
102613	RL-MPS	60 × 21 × 7 in	42	64	64

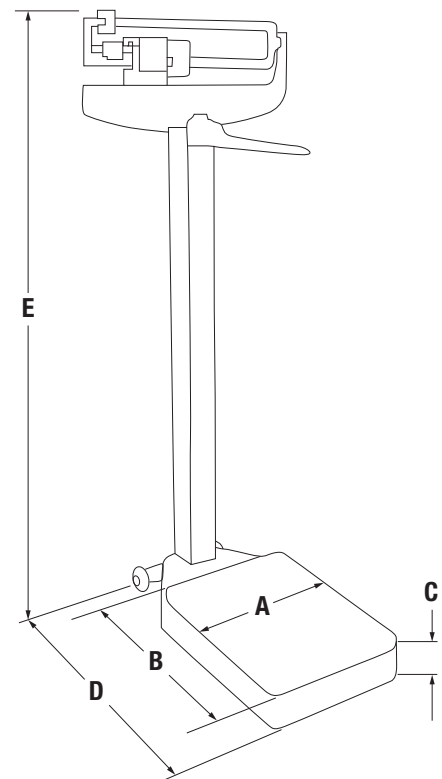

## Dimensions

	Inches	Centimeters
A	10.75	27.3
B	14.75	37.5
C	4.13	10.5
D	22.30	56.6
E	58.50	148.6

# RL-MPS-10

Mechanical Physician Scale

HEALTH SCALES



**LB Only**

## Standard Features

- Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Durable wheels for easy transport
- Easy operation with two sliding weights
- Removable slip-resistant scale base cover
- Aluminum height rod

## Specifications

### Capacity:

450 lb × 4 oz

### Platform Dimensions:

(L × W × H)

14.75 × 10.75 × 4.13 in

### Height Rod:

Measures 24 to 84 in

### Height Division:

0.125 in

### Warranty:


Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
124223	RL-MPS-10	450 lb × 4 oz	\$345.00

## Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
124223	RL-MPS-10	60 × 21 × 7 in	42	64	64

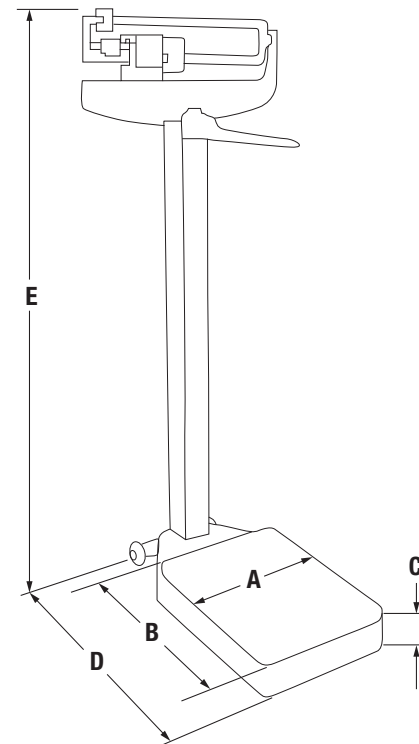

## Dimensions

	Inches	Centimeters
A	10.75	27.3
B	14.75	37.5
C	4.13	10.5
D	22.30	56.6
E	58.50	148.6

# RL-MPS-30

Mechanical Physician Scale

HEALTH SCALES



## Standard Features

- Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Handpost
- Two wheels for easy transport
- Easy operation with two sliding weights
- Removable slip-resistant scale base cover
- Aluminum height rod

## Specifications

### Capacity:

180 kg x 100 g

### Platform Dimensions:

(L x W x H)

37.5 x 27.3 x 10.5 cm

### Height Rod:

Measures 60 to 212 cm

### Height Division:

0.1 cm

### Warranty:


Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
132703	RL-MPS-30	180 kg x 100 g	\$385.00

## Shipping Weight

Part #	Model #	L x W x H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
132703	RL-MPS-30	60 x 21 x 7 in	40	64	64

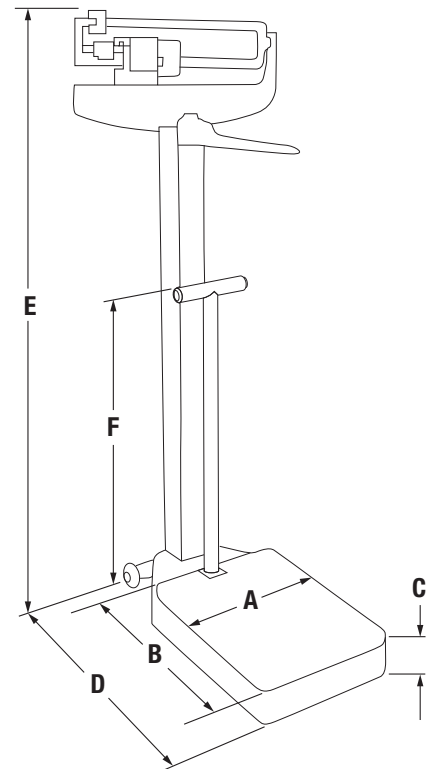

## Dimensions

	Inches	Centimeters
A	10.75	27.3
B	14.75	37.5
C	4.13	10.5
D	22.30	56.6
E	58.50	148.6
F	31.50	80.0

# RL-MPS-40

Mechanical Physician Scale

HEALTH SCALES



## Standard Features

- Dual-read capacity and height rod
- Sturdy enameled steel body
- Painted beam designed to hold counterpoise weights
- Rugged scale understructure
- Removable slip-resistant plastic scale base cover
- Retractable aluminum height rod
- Easy operation with two sliding weights and two counterpoise weights (included)
- Two wheels for easy transport
- Aluminum height rod

## Specifications

### Capacity:

490 lb × 4 oz (220 kg × 100 g)

### Platform Dimensions:

(L × W × H)

14.75 × 10.75 × 4.13 in

### Height Rod:

Measures 24 to 84 in

(60 to 212 cm)

### Height Division:

0.125 in (0.1 cm)

### Warranty:


Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
185289	RL-MPS-40	490 lb × 4 oz (220 kg × 100 g)	\$375.00

## Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
185289	RL-MPS-40	60 × 21 × 7 in	44	64	64

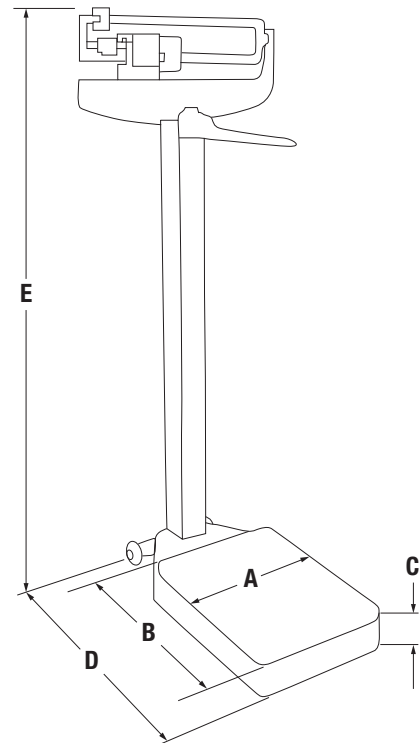

## Dimensions

	Inches	Centimeters
A	10.75	27.3
B	14.75	37.5
C	4.13	10.5
D	22.30	56.6
E	58.50	148.6

# RL-MPS-50

Mechanical Physician Scale

HEALTH SCALES



## Standard Features

- Two wheels for easy transport
- Aluminum height rod included
- Poise travels free on weigh beam with simple finger tap
- Easy-to-read weigh beam
- Color-coded black inset shows lb markings, white inset shows kg markings. The beam can be rotated to the desired unit of measure.
- Aluminum height rod

## Specifications

### Capacity:

450 lb × 4 oz (200 kg × 100 g)

### Platform Dimensions:

(L × W × H)  
14.75 × 10.75 × 4.13 in

### Height Rod:


Measures 29.50 to 78.75 in  
(75 to 200 cm)

### Height Division:

0.25 in (5 mm)

### Warranty:

Two-year limited

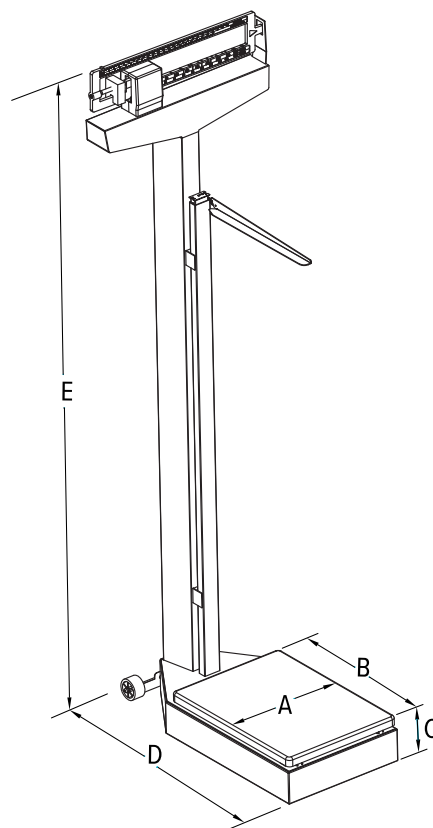

## Part Number/Price

Part #	Model #	Capacity	Price
195264	RL-MPS-50	450 lb × 4 oz (200 kg × 100 g)	\$380.00

## Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
195264	RL-MPS-50	60 × 21 × 5 in	39	46	46



KG



LB

## Dimensions

	Inches	Centimeters
A	10.75	27.3
B	14.75	37.5
C	4.13	10.5
D	22.30	56.6
E	58.50	148.6





EYE-LEVEL

### Standard Features

- Large push-button LCD display
- Antimicrobial keypad
- Large, stable scale base
- Integrated height rod
- Nonslip rubber mat, removable for cleaning
- Two wheels for easy transport
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Hold function
- Zero function
- BMI (body mass index) function
- Factory calibrated

### Specifications

**Capacity:**

550 × 0.2 lb (250 × 0.1 kg)

**Platform Dimensions:**

(L × W × H)


14.70 × 14.70 × 3.00 in

**Height Rod:**
Measures from 27.50 to 82.00 in  
(70 to 208 cm)
**Power:**
9 VDC, provided by six AA alkaline batteries  
(included) or AC adapter (optional)
**Battery Type:**

Six AA alkaline (included)

**Battery Use:**
25 hours continuous use  
with batteries  
Automatic power-off  
can be configured
**Display:**
5-digit LCD display,  
0.75 in (1.9 cm) digit height
**Temperature:**
Operating:  
50 °F to 104 °F (10 °C to 40 °C)
**Warranty:**

Two-year limited

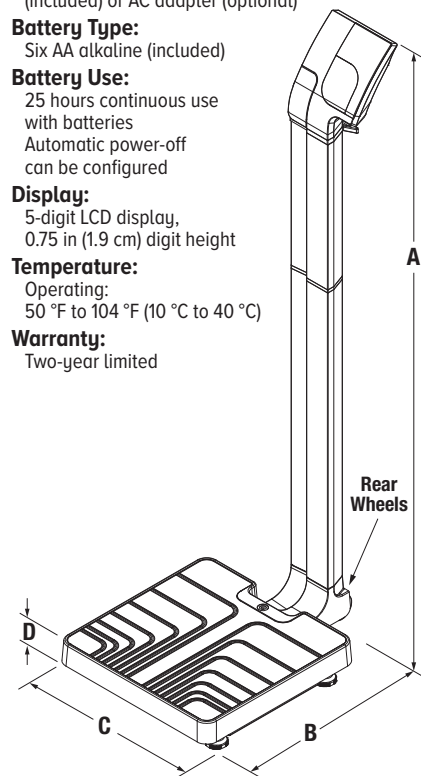

### Part Number/Price

Part #	Model #	Capacity	Price
119113	150-10-5	550 × 0.2 lb (250 × 0.1 kg) with USB	\$695.00
194726	150-10-5BLE	550 × 0.2 lb (250 × 0.1 kg) WPAN	\$930.00

### Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
119113	150-10-5	30 × 18 × 9 in	26	35	35
194726	150-10-5BLE	30 × 18 × 9 in	26	35	35

### Options/Accessories

Part #	Description	Price
115655 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, medical grade power supply	\$43.00
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00



† NEMA 1-15 Plug



†† CEE 7/16 Plug

### Dimensions

	Inches	Centimeters
A	54.00	137.2
B	22.40	56.9
C	14.70	37.5
D	3.00	7.6

# 150-10-6

Digital Physician Scale

HEALTH SCALES



WAIST-LEVEL

## Standard Features

- Large push-button LCD display
- Antimicrobial keypad
- Large, stable scale base
- Two wheels for easy transport
- Nonslip rubber mat, removable for cleaning
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Hold function
- Zero function
- BMI (body mass index) function
- Factory calibrated

## Specifications

### Capacity:

550 × 0.2 lb (250 × 0.1 kg)

### Platform Dimensions:

(L × W × H)  
14.70 × 14.70 × 3.00 in

### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### Battery Type:

Six AA alkaline (included)

### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

### Display:

5-digit LCD display,  
0.75 in (1.9 cm) digit height

### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

### Warranty:

Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
161786	150-10-6	550 × 0.2 lb (250 × 0.1 kg) with USB	\$675.00
194732	150-10-6BLE	550 × 0.2 lb (250 × 0.1 kg) WPAN	\$910.00

## Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
161786	150-10-6	30 × 19 × 9 in	25	37	37
194732	150-10-6BLE	30 × 19 × 9 in	25	37	37

## Options/Accessories


Part #	Description	Price
115655 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, medical grade power supply	\$43.00
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00



† NEMA 1-15 Plug



†† CEE 7/16 Plug

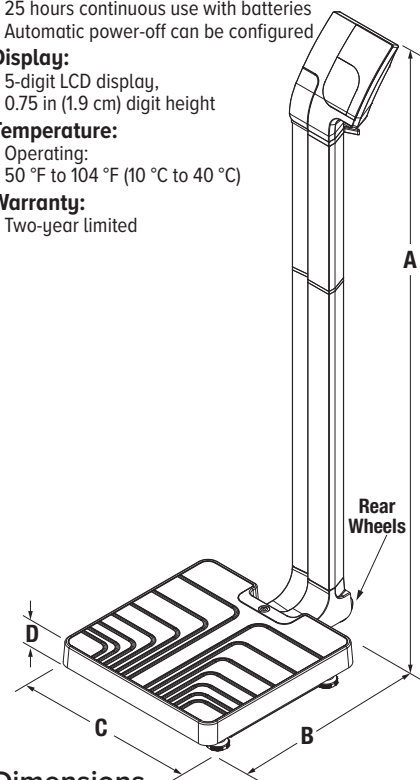

## Dimensions

	Inches	Centimeters
A	48.40	123.0
B	22.40	56.9
C	14.70	37.5
D	3.00	7.6



FLOOR-LEVEL

## Standard Features

- Large push-button LCD display
- Antimicrobial keypad
- Large, stable scale base
- Nonslip rubber mat, removable for cleaning
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication port
- Wireless personal area network (WPAN) option available
- Hold function
- Zero function
- BMI (body mass index) function
- Factory calibrated

## Specifications

### Capacity:

550 × 0.2 lb (250 × 0.1 kg)

### Platform Dimensions:

(L × W × H)

14.70 × 14.70 × 3.00 in

### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### Battery Type:

Six AA alkaline (included)

### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

### Cable Length:

6 ft (1.8 m) cable between scale base and indicator

### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

### Warranty:

Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
121304	150-10-7	550 × 0.2 lb (250 × 0.1 kg) with USB	\$555.00
194728	150-10-7BLE	550 × 0.2 lb (250 × 0.1 kg) WPAN	\$790.00

## Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
121304	150-10-7	25 × 18 × 6 in	17	20	20
194728	150-10-7BLE	25 × 18 × 6 in	17	20	20

## Options/Accessories


Part #	Description	Price
115655 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, medical grade power supply	\$43.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
107445	Carrying case	\$92.00



† NEMA 1-15 Plug



†† CEE 7/16 Plug

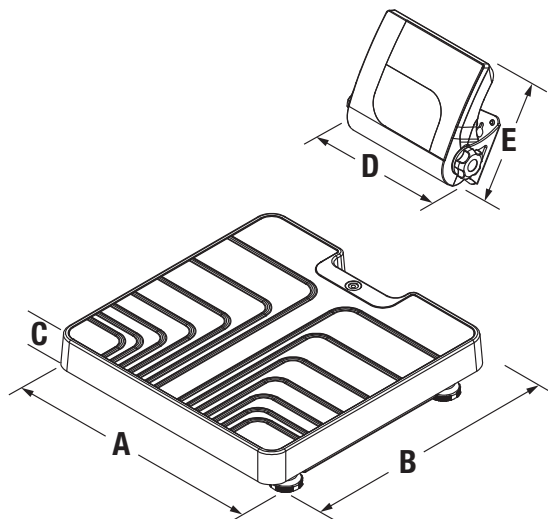

## Dimensions

	Inches	Centimeters
A	14.70	37.5
B	14.70	37.5
C	3.00	7.6
D	7.80	19.8
E	6.70	17.0

# 150-10-8

Digital Physician Scale

HEALTH SCALES



FLOOR LEVEL WITH  
ATTACHED INDICATOR

## Standard Features

- Large push-button LCD display
- Antimicrobial keypad
- Large, stable scale base
- Nonslip rubber mat, removable for cleaning
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- USB or Wireless personal area network (WPAN) option available
- Hold function
- Zero function
- BMI (body mass index) function
- Factory calibrated

## Specifications

### Capacity:

550 × 0.2 lb (250 × 0.1 kg)

### Platform Dimensions:

(L × W × H)

14.70 × 14.70 × 3.00 in

### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### Battery Type:

Six AA alkaline (included)

### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

### Warranty:

Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
224055	150-10-8	550 × 0.2 lb (250 × 0.1 kg) with USB	\$575.00
224056	150-10-8BLE	550 × 0.2 lb (250 × 0.1 kg) WPAN	\$810.00

## Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
224055	150-10-8	12.7 × 22.4 × 14.7 in	25	37	37
224056	150-10-8BLE	12.7 × 22.4 × 14.7 in	25	37	37

## Options/Accessories


Part #	Description	Price
115655 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, medical grade power supply	\$43.00
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00



† NEMA 1-15 Plug



†† CEE 7/16 Plug

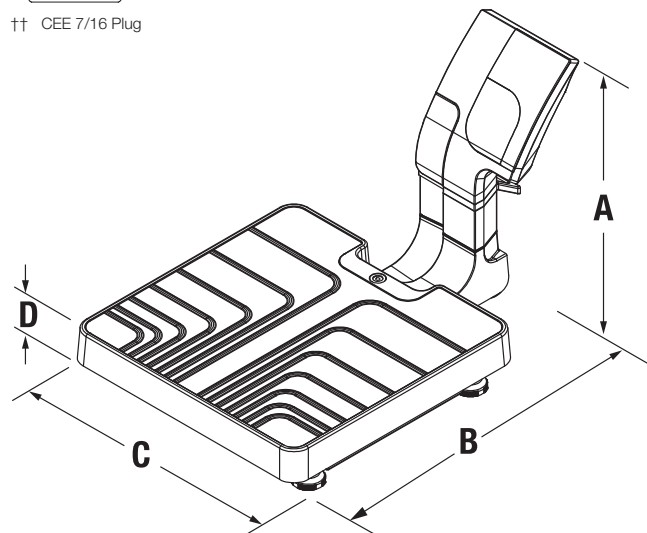

## Dimensions

	Inches	Centimeters
A	12.70	32.3
B	22.40	56.9
C	14.70	37.4
D	3.00	7.6



## Approvals



## Part Number/Price

Part #	Model #	Capacity	Price
193355	160-10-7N	550 × 0.2 lb (250 × 0.1 kg)	\$800.00

## Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
193355	160-10-7N	20 × 18 × 6 in	18	16	18

## Options/Accessories

Part #	Description	Price
107445	Carrying case	\$92.00



† NEMA 1-15 Plug

## Standard Features

- Push-button LCD display
- Antimicrobial keypad
- Large, stable scale base
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Zero function
- Factory calibrated

## Specifications

## Capacity:

550 × 0.2 lb (250 × 0.1 kg)

## Platform Dimensions:

(L × W × H)

14.40 × 14.40 × 1.65 in

## Power:

9 VDC, provided by six AA alkaline batteries (included) or 120V/230V AC adapter, NEMA 1-15 plug (included)

## Battery Type:

Six AA alkaline (included)

## Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

## Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

## Cable Length:

6 ft (1.8 m) cable between scale base and indicator

## Temperature:

Operating:


50 °F to 104 °F (10 °C to 40 °C)

## Approvals:

NTEP 18-011

## Warranty:

Two-year limited

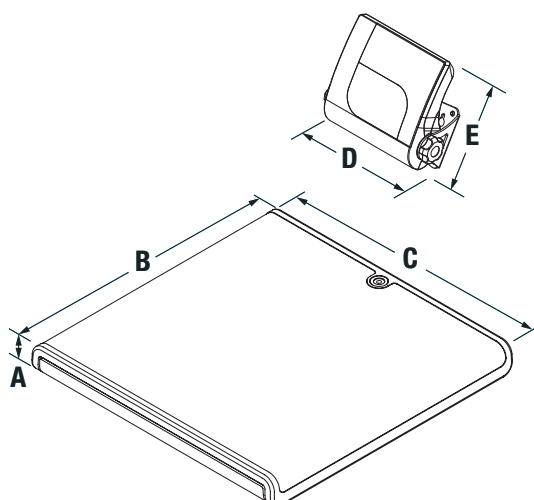

## Dimensions

	Inches	Centimeters
A	1.7	4.3
B	14.4	36.6
C	14.4	36.6
D	7.8	20.0
E	6.7	17.0

# RL-WMS-10

Wall Mount Stadiometer

HEALTH SCALES



### Standard Features

- Aluminum construction
- Folding headpiece makes the product compact when not in use
- Measures both inches and centimeters
- Hardware included for mounting to metal, wood or drywall walls

### Specifications

**Measurement Range:**  
23 to 82 in (60 to 210 cm)  
**Height Divisions:**  
1/16 in (1 mm)  
**Warranty:**  
One-year limited

### Part Number/Price

Part #	Model #	Measuring Range × Graduation Length	Price
206553	RL-WMS-10	23 to 82 × 1/16 in (60 to 120 cm × 1 mm)	\$103.00







### Standard Features

- Painted beam
- Sturdy, enameled steel body
- Easy-to-clean ABS plastic tray
- Dual-read capacity; lb and kg
- Built-in measuring tape

### Specifications

#### Capacity:

135 lb × 1 oz (62 kg × 20 g)

#### Measuring Tape:

Measures 0 to 23 in  
(0 to 58 cm)

#### Warranty:

Two-year limited

### Part Number/Price


Part #	Model #	Capacity	Price
131470	RL-MIS	135 lb × 1 oz (62 kg × 20 g)	\$370.00

### Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
131470	RL-MIS	28 × 20 × 14 in	30	57	57

### Dimensions

	Inches	Centimeters		Inches	Centimeters
A	24.00	61.0	D	16.50	41.9
B	27.00	68.6	E	2.70	6.8
C	21.50	54.5	F	13.39	34.0

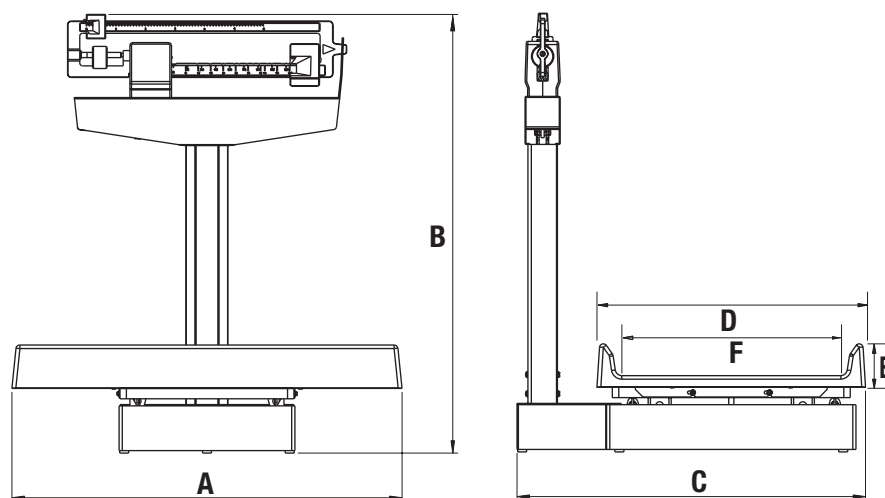

# RL-MIS-20

Mechanical Baby Scale



**KG Only**

## Standard Features

- Painted beam
- Sturdy, enameled steel body
- Easy-to-clean ABS plastic tray
- Unit of measure: kg
- Built-in measuring tape

## Specifications

### Capacity:

70 kg × 20 g

### Measuring Tape:

0 to 58 cm

### Warranty:

Two-year limited

## Part Number/Price


Part #	Model #	Capacity	Price
131471	RL-MIS-20	70 kg × 20 g	\$370.00

## Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
131471	RL-MIS-20	28 × 20 × 14 in	30	57	57

## Dimensions

	Centimeters		Centimeters
A	61.0	D	41.9
B	68.6	E	6.8
C	54.5	F	34.0

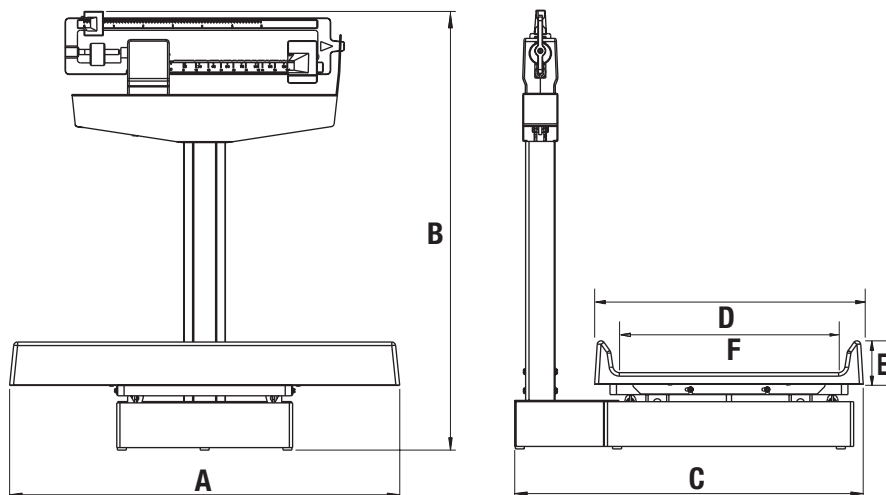





## Standard Features

- Large 1-in LCD display
- Unit of measure locking
- Recall function to view last weight
- Automatic shut-off for long battery life
- Built-in measuring tape
- Optional carrying case

## Specifications

**Capacity:**  
44 lb × 0.5 oz (20 kg × 10 g)

**Power:**  
Four AA alkaline batteries (included)  
or AC adapter (included)

**Battery Type:**  
Four AA alkaline (included)

**Measuring Tape:**  
0 to 22.5 in (0 to 57 cm)

**Approvals:**  
AC adapter: cULus

**Warranty:**  
Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
107423	RL-DBS	44 lb × 0.5 oz (20 kg × 10 g), includes 120 VAC adapter	\$225.00
112571	RL-DBS	44 lb × 0.5 oz (20 kg × 10 g), includes 230 VAC adapter	\$225.00

## Shipping Weight




Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
107423	RL-DBS 120 V	27 × 18 × 7 in	10	21	21
112571	RL-DBS 230 V	27 × 18 × 7 in	10	21	21

## Options/Accessories

Part #	Description	Price
112570	Carrying case	\$56.00



Optional Transport/Carrying Case

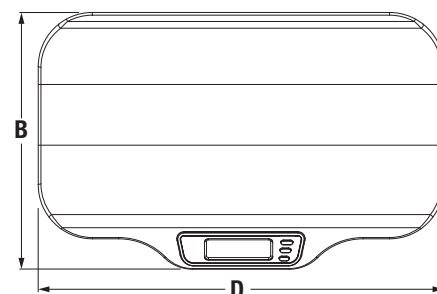


## Dimensions

	Inches	Centimeters
A	3.90	9.9
B	15.00	38.1
C	3.10	7.8
D	23.60	59.9
E	11.00	27.9

# RL-DBS-2

Digital Baby Scale

HEALTH SCALES

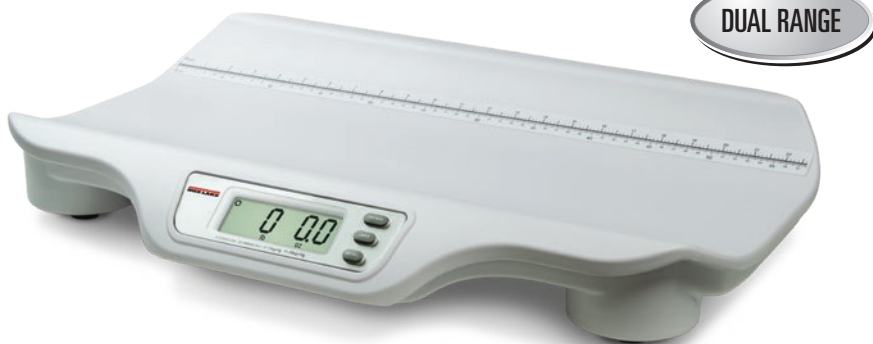

## Standard Features

- Large 1-inch LCD display
- Dual-range capacity for increased precision
- Accuracy within 5 g
- Unit of measure locking
- Recall function to view last weight
- Automatic shut-off for long battery life
- Built-in measuring tape
- Optional carrying case

## Specifications

### Capacity:

Range 1: 0 to 22 lb × 0.2 oz  
(0 to 10 kg × 5 g)  
Range 2: 22 to 44 lb × 0.5 oz  
(10 to 20 kg × 10 g)

### Power:

Four AA alkaline batteries (included)  
or AC adapter (included)

### Battery Type:

Four AA alkaline (included)

### Measuring Tape:

0 to 22.5 in (0 to 57 cm)

### Approvals:

AC adapter: cULus

### Warranty:

Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
155922	RL-DBS-2	0 to 22 lb × 0.2 oz, 22 to 44 lb × 0.5 oz (0 to 10 kg × 5 g, 10 to 20 kg × 10 g) includes 120 VAC adapter	\$265.00

## Shipping Weight




Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
155922	RL-DBS-2 120 V	28 × 18 × 7 in	10	21	21

## Options/Accessories

Part #	Description	Price
112570	Carrying Case	\$56.00



Optional Transport/Carrying Case

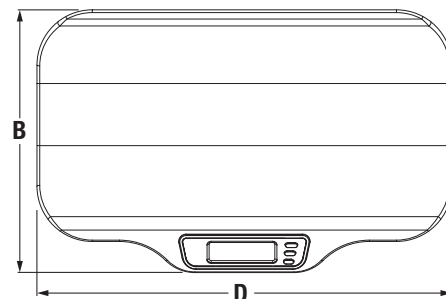

## Dimensions

	Inches	Centimeters
A	3.90	9.9
B	15.00	38.1
C	3.10	7.8
D	23.60	59.9
E	11.00	27.9



### Standard Features

- LCD display
- Dual-range capacity for increased precision
- Unit of measure locking
- Automatic shut-off for long battery life
- Motiontrap™ movement compensation technology
- Built-in measuring tape

### Specifications

#### Capacity:

Range 1: 0 to 10 lb × 0.05 oz (0 to 5 kg × 1 g)  
Range 2: 10 to 33 lb × 0.1 oz (5 to 15 kg × 2 g)

#### Power:

12 VDC, provided by six AA lithium batteries (included) or AC adapter (optional)

#### Measuring Tape:

0 to 23.5 in × 0.125 in  
(0 to 60 cm × 0.25 cm)

#### Battery Type:

Six Li-FeS2 batteries

#### Temperature:

Operating:  
50 °F to 95 °F (10 °C to 35 °C)

#### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

#### Warranty:

Two-year limited

### Part Number/Price

Part #	Model #	Capacity	Price
161784	650-10-1	0 to 10 lb × 0.05 oz, 10 to 33 lb × 0.1 oz (0 to 5 kg × 1 g, 5 to 15 kg × 2 g)	\$765.00

### Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
161784	650-10-1	18 × 28 × 11 in	25	40	40

### Options/Accessories

Part #	Description	Price
165138	12VDC adapter, 100-240V, NEMA 1-15 Plug, medical grade power supply	\$55.00

### Dimensions

	Inches	Centimeters
A	23.94	60.8
B	16.95	43.1
C	6.29	16.0
D	10.50	26.7
E	3.11	7.9
F	13.34	33.9

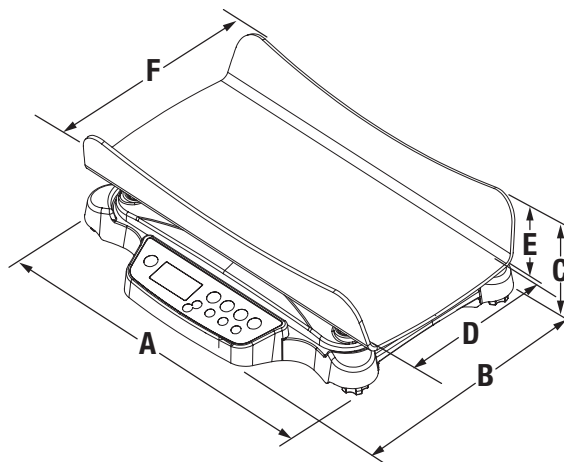

# 260-10-1

## Bariatric Handrail Scale



### Standard Features

- Large LCD display
- Antimicrobial keypad
- Handrail for support and safety
- Two wheels for easy transport
- Nonslip platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- Optional height rod can be installed on-site

### Specifications

#### Capacity:

800 × 0.2 lb (360 × 0.1 kg)

#### Platform Dimensions:

(L × W × H)

23.50 × 23.50 × 2.75 in

#### Optional Height Rod Dimensions:

30 to 83.12 in (77 to 211 cm)

#### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

#### Battery Type:

Six AA alkaline (included)

#### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

#### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

#### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

#### Warranty:

Two-year limited

### Part Number/Price

Part #	Model #	Capacity	Price
170139	260-10-1	800 × 0.2 lb (360 × 0.1 kg) with USB	\$1,685.00

### Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
170139	260-10-1	40 × 40 × 10 in	58	116	116
172958	Height rod	33 × 9 × 3 in	3	7	7

### Options/Accessories

Part #	Description	Price
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00
172958	Height rod 30 to 83 in (77 to 210 cm)	\$75.00




† NEMA 1-15 Plug



†† CEE 7/16 Plug

### Dimensions

	Inches	Centimeters
A	23.50	59.7
B	23.50	59.7
C	2.75	7.0
D	25.50	64.8
E	33.50	85.1
F	43.00	109.2

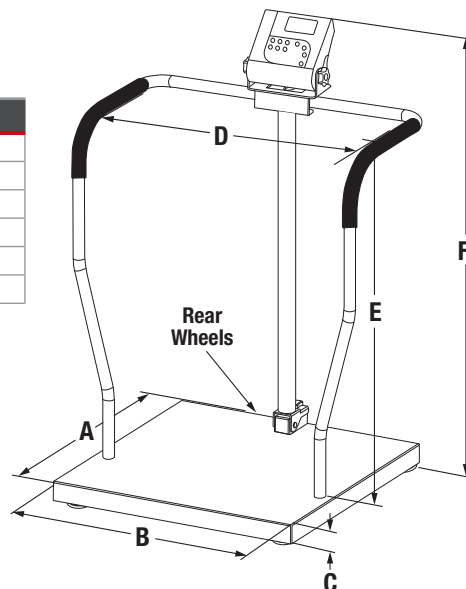



## Standard Features

- Large LCD display
- Antimicrobial keypad
- Handrail for support and safety
- Two wheels for easy transport
- Nonslip platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

## Specifications

**Capacity:**  
1,000 × 0.2 lb (450 × 0.1 kg)

**Platform Dimensions:**  
(L × W × H)  
25.00 × 20.00 × 3.00 in

**Power:**  
9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

**Battery Type:**  
Six AA alkaline (included)

**Battery Use:**  
25 hours continuous use with batteries  
Automatic power-off can be configured

**Display:**  
5-digit LCD display, 0.75 in (1.9 cm) digit height

**Temperature:**  
Operating:  
50 °F to 104 °F (10 °C to 40 °C)

**Warranty:**  
Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
133119	250-10-2	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$1,840.00
194733	250-10-2BLE	1,000 × 0.2 lb (450 × 0.1 kg) WPAN	\$2,145.00

## Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
133119	250-10-2	46 × 30 × 9 in	66	94	94
194733	250-10-2BLE	46 × 30 × 9 in	66	94	94

## Options/Accessories

Part #	Description	Price
115655 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, medical grade power supply	\$43.00
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00




† NEMA 1-15 Plug



†† CEE 7/16 Plug

## Dimensions

	Inches	Centimeters
A	20.00	50.8
B	25.00	63.5
C	3.00	7.6
D	25.00	63.5
E	32.84	83.4
F	34.34	87.2
G	44.50	113.0
H	21.71	55.1

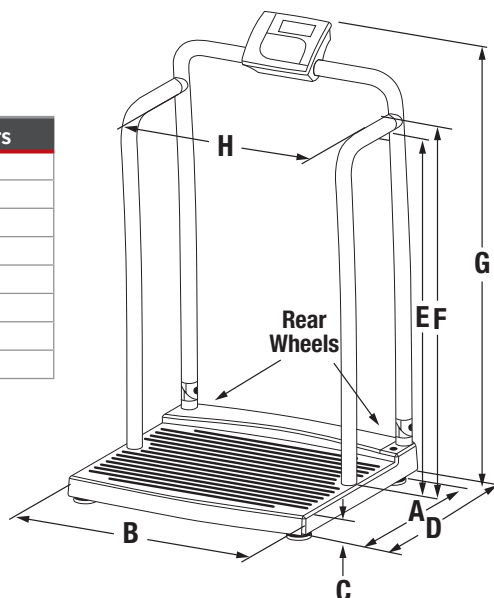

# 250-10-4

## Bariatric Handrail Scale



20 INCH  
SEAT WIDTH

### Standard Features

- Large LCD display
- Antimicrobial keypad
- Handrail for support and safety
- Padded seat with backrest
- Two wheels for easy transport
- Nonslip platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

### Specifications

#### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

#### Platform Dimensions:

(L × W × H)  
25.00 × 20.00 × 3.00 in

#### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

#### Battery Type:

Six AA alkaline (included)

#### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

#### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

#### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

#### Warranty:

Two-year limited

### Part Number/Price

Part #	Model #	Capacity	Price
133120	250-10-4	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$2,810.00
194734	250-10-4BLE	1,000 × 0.2 lb (450 × 0.1 kg) WPAN	\$3,115.00

### Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
133120	250-10-4	47 × 27 × 16 in	94	154	154
194734	250-10-4BLE	47 × 27 × 16 in	94	154	154

### Options/Accessories

Part #	Description	Price
115655 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, medical grade power supply	\$43.00
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00




† NEMA 1-15 Plug



†† CEE 7/16 Plug

### Dimensions

	Inches	Centimeters
A	3.00	7.6
B	25.70	65.3
C	25.20	64.0
D	21.60	54.9
E	32.00	81.1
F	47.50	120.7
G	20.00	50.8
H	12.00	30.5
I	36.00	91.4

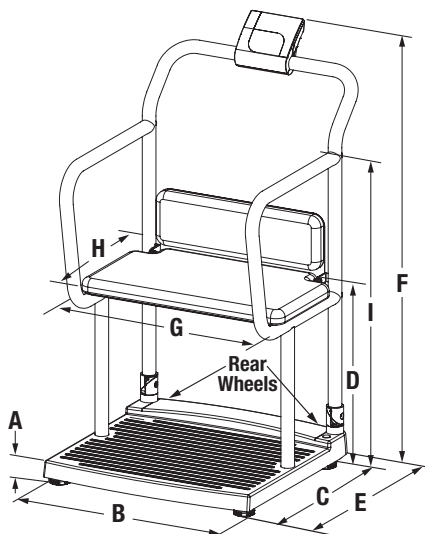





## Standard Features

- Swing-up arms for easy access and exit
- Fold-up footrest
- Sturdy enameled, steel frame
- Dual read die-cast beam
- Polypropylene seat with ABS armrests
- Heavy-duty wheels; two back wheels lock, two front wheels swivel

## Specifications

**Capacity:**  
Lb only beam 450 lb × 4 oz  
Kg only beam 200 kg × 100 g

**Warranty:**  
Two-year limited

## Part Number/Price



Part #	Model #	Capacity	Price
172098	RL-MCS-LB	450 lb × 4 oz	\$725.00
172099	RL-MCS-KG	200 kg × 100 g	\$725.00

## Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
172098	RL-MCS-LB	29 × 25 × 25 in	79	131	131
172099	RL-MCS-KG	29 × 25 × 25 in	79	131	131

## Dimensions

	Inches	Centimeters
A	21.50	54.6
B	14.20	36.1
C	14.80	37.6
D	16.00	40.6
E	25.38	64.5
F	38.40	97.5
G	35.70	90.7

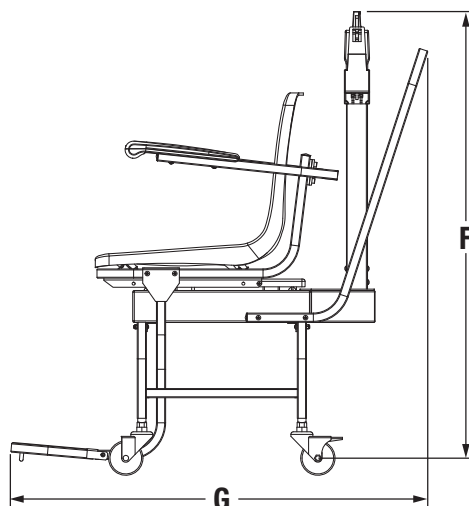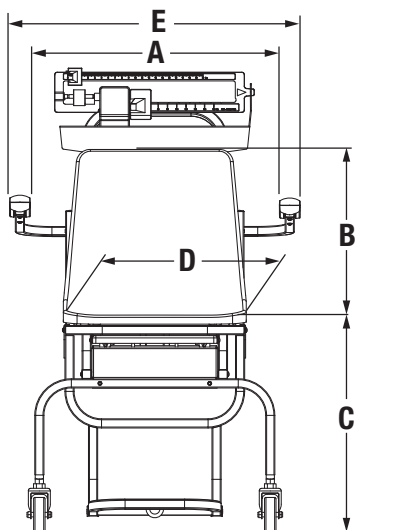

# 560-10-1

Digital Chair Scale

HEALTH SCALES



20 INCH  
SEAT WIDTH

## Standard Features

- Large LCD display
- Enameled tubular steel frame
- Four heavy-duty caster wheels
- Swing-up arms
- Side-folding footrests
- Molded seat
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- USB data communication port
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

## Specifications

### Capacity:

660 × 0.2 lb (300 × 0.1 kg)

### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### Battery Type:

Six AA alkaline (included)

### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

### Warranty:

Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
166644	560-10-1	660 × 0.2 lb (300 × 0.1 kg)	\$1,675.00

## Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
166644	560-10-1	33 × 23 × 27 in	65	148	148

## Options/Accessories

Part #	Description	Price
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00





† NEMA 1-15 Plug



†† CEE 7/16 Plug

## Dimensions

	Inches	Centimeters
A	20.10	51.1
B	17.30	44.0
C	20.10	51.1
D	36.40	92.5
E	5.90	15.0
F	21.50	54.6
G	34.60	88.0
H	42.90	109.0

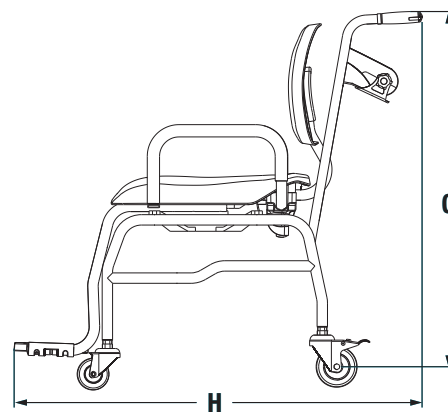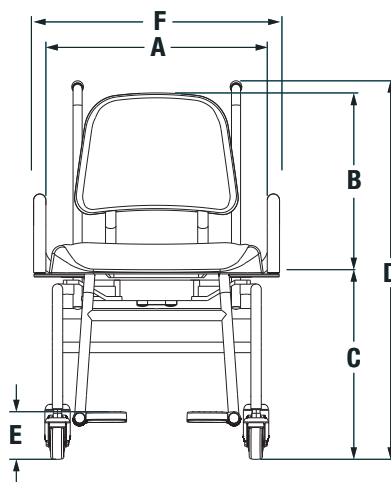





## Standard Features

- Large LCD display
- Antimicrobial keypad
- Enameled tubular steel frame
- Four heavy-duty locking caster wheels
- Swing-up arms
- Flip-up footrest
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

## Specifications

### Capacity:

660 × 0.2 lb (300 × 0.1 kg)

### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### Battery Type:

Six AA alkaline (included)

### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

### Warranty:

Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
119114	550-10-1	660 × 0.2 lb (300 × 0.1 kg) with USB	\$1,610.00
194740	550-10-1BLE	660 × 0.2 lb (300 × 0.1 kg) WPAN	\$1,915.00

## Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
119114	550-10-1	29 × 27 × 29 in	54	164	164
194740	550-10-1BLE	29 × 27 × 29 in	54	164	164

## Options/Accessories

Part #	Description	Price
115655 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, medical grade power supply	\$43.00
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00





† NEMA 1-15 Plug



†† CEE 7/16 Plug

## Dimensions

	Inches	Centimeters
A	37.26	94.6
B	15.61	39.6
C	20.74	52.7
D	2.15	5.5
E	25.06	63.7
F	20.70	52.6
G	35.78	90.9
H	33.58	85.3
I	12.95	32.9

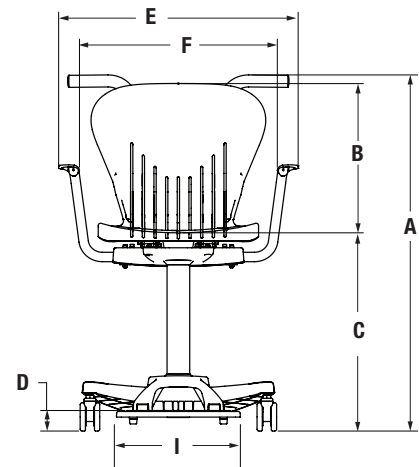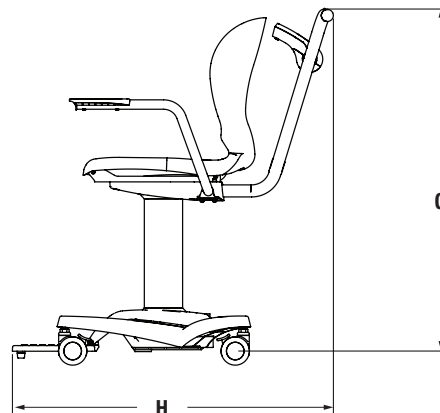

# 350-10-3M

Dual-ramp Wheelchair Scale



## Standard Features

- Large LCD display
- Antimicrobial keypad
- Two wheels for easy transport
- Dual ramp
- Metal nonslip platform
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- Easy to store, folded depth is 11.75 in (29.8 cm)

## Specifications

### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

### Platform Dimensions:

(L × W × H)  
29.50 × 31.50 × 3.15 in

### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### Battery Type:

Six AA alkaline (included)

### Battery Use:

25 hours of continuous use with batteries  
Automatic power-off can be configured

### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

### Warranty:

Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
193956	350-10-3M	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$3,115.00
203910	350-10-3MBLE	1,000 × 0.2 lb (450 × 0.1 kg) WPAN	\$3,420.00

## Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
193956	350-10-3M	51 × 42 × 14 in	102	216	216
203910	350-10-3MBLE	51 × 42 × 14 in	102	216	216

## Options/Accessories

Part #	Description	Price
115655 †	9 VDC adapter, 120 V/230 V auto switching medical grade power supply	\$43.00
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00




† NEMA 1-15 Plug



†† CEE 7/16 Plug

## Dimensions

	Inches	Centimeters
A	3.15	8.0
B	47.70	121.2
C	37.80	96.0
D	45.30	115.1
E	31.50	80.0
F	29.50	74.9
G	2.40	6.1
H	27.20	69.1

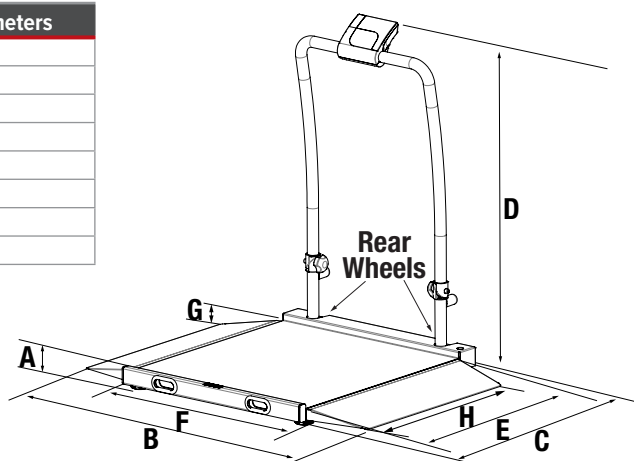

350-10-3M in folded position



WITH HANDRAIL

## Standard Features

- Large LCD display
- Antimicrobial keypad
- Two wheels for easy transport
- Single ramp
- Nonslip platform
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- Easy to store, folded depth is 11.75 in (29.8 cm)

## Specifications

## Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

## Platform Dimensions Without Ramp:

(L × W × H)  
29.50 × 32.00 × 2.40 in

## Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

## Battery Type:

Six AA alkaline (included)

## Battery Use:

25 hours of continuous use with batteries  
Automatic power-off can be configured

## Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

## Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

## Warranty:

Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
141445	350-10-2	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$2,125.00
194739	350-10-2BLE	1,000 × 0.2 lb (450 × 0.1 kg) WPAN	\$2,475.00

## Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
141445	350-10-2	42 × 41 × 14 in	90	174	174
194739	350-10-2BLE	42 × 41 × 14 in	90	174	174

## Options/Accessories

Part #	Description	Price
115655 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, medical grade power supply	\$43.00
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00




† NEMA 1-15 Plug



†† CEE 7/16 Plug

## Dimensions

	Inches	Centimeters
A	29.50	74.9
B	32.00	81.3
C	2.40	6.1
D	9.30	23.6
E	37.50	95.3
F	45.00	114.3

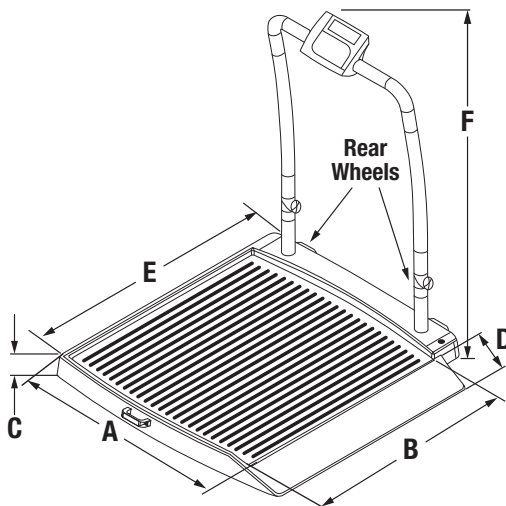

Wheelchair scale in folded position

# 350-10-7

## Single-ramp Wheelchair Platform Scale



### Standard Features

- Large LCD display
- Antimicrobial keypad
- Two wheels for easy transport
- Single ramp
- Nonslip platform
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

### Specifications

#### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

#### Platform Dimensions Without Ramp:

(L × W × H)  
29.50 × 32.00 × 2.40 in

#### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

#### Battery Type:

Six AA alkaline (included)

#### Battery Use:

25 hours of continuous use with batteries  
Automatic power-off can be configured

#### Cable Length:

7 ft (2.1 m) cable between scale base and indicator

#### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

#### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

#### Warranty:

Two-year limited

### Part Number/Price

Part #	Model #	Capacity	Price
141446	350-10-7	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$2,280.00
194738	350-10-7BLE	1,000 × 0.2 lb (450 × 0.1 kg) WPAN	\$2,780.00

### Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
141446	350-10-7	45 × 44 × 7 in	78	100	100
194738	350-10-7BLE	45 × 44 × 7 in	78	100	100

### Options/Accessories

Part #	Description	Price
115655 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, medical grade power supply	\$43.00
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00




† NEMA 1-15 Plug



†† CEE 7/16 Plug

### Dimensions

	Inches	Centimeters
A	29.50	74.9
B	32.00	81.3
C	2.40	6.1
D	9.30	23.6
E	37.50	95.3

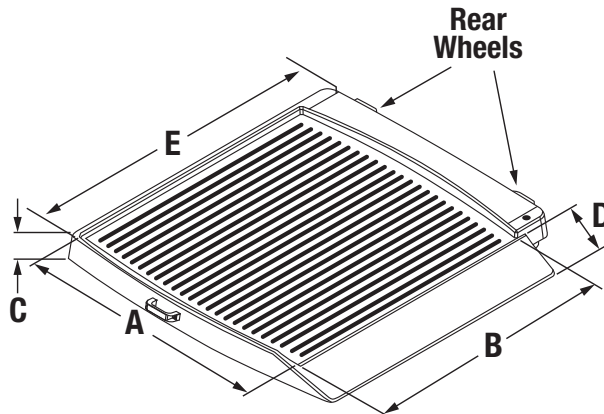



WITH HANDRAIL

### Standard Features

- Large LCD display
- Antimicrobial keypad
- Two wheels for easy transport
- Dual ramp
- Nonslip platform
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- Easy to store, folded depth is 11.75 in (29.8 cm)

### Specifications

#### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

#### Platform Dimensions Without Ramps:

(L × W × H)

29.50 × 32.00 × 2.40 in

#### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

#### Battery Type:

Six AA alkaline (included)

#### Battery Use:

25 hours of continuous use with batteries  
Automatic power-off can be configured

#### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

#### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

#### Warranty:

Two-year limited

### Part Number/Price

Part #	Model #	Capacity	Price
141447	350-10-3	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$2,820.00
194736	350-10-3BLE	1,000 × 0.2 lb (450 × 0.1 kg) WPAN	\$3,125.00

### Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
141447	350-10-3	51 × 42 × 14 in	102	216	216
194736	350-10-3BLE	51 × 42 × 14 in	102	216	216

### Options/Accessories

Part #	Description	Price
115655 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, medical grade power supply	\$43.00
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00




† NEMA 1-15 Plug



†† CEE 7/16 Plug

### Dimensions

	Inches	Centimeters
A	48.50	123.2
B	32.00	81.3
C	2.40	6.1
D	9.30	23.6
E	38.00	96.5
F	45.00	114.3
G	29.50	74.90

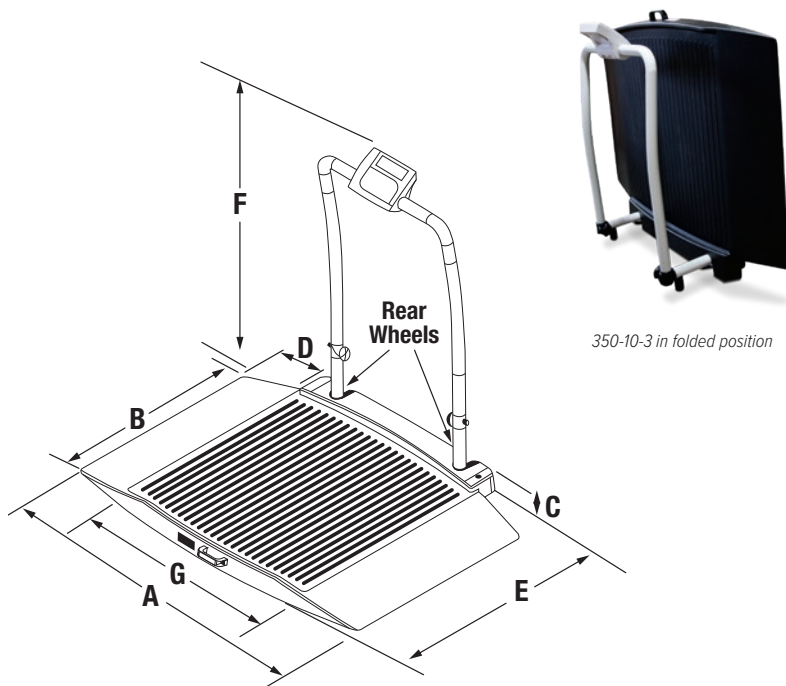

350-10-3 in folded position



# 350-10-4

## Dual-ramp Wheelchair Scale



WITH SEAT AND HANDRAIL

### Standard Features

- Large LCD display
- Antimicrobial keypad
- Two wheels for portability
- Dual ramp
- Nonslip platform
- Fold-away padded seat with backrest
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- Easy to store, folded depth is 11.75 in (29.8 cm)

### Specifications

#### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

#### Platform Dimensions Without Ramps:

(L × W × H)  
29.50 × 32.00 × 2.40 in

#### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

#### Battery Type:

Six AA alkaline (included)

#### Battery Use:

25 hours of continuous use with batteries  
Automatic power-off can be configured

#### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

#### Temperature:

Operating:  
50 °F to 104 °F (14 °C to 40 °C)

#### Warranty:

Two-year limited

### Part Number/Price

Part #	Model #	Capacity	Price
141448	350-10-4	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$4,050.00
194737	350-10-4BLE	1,000 × 0.2 lb (450 × 0.1 kg) WPAN	\$4,355.00

### Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
141448	350-10-4	51 × 43 × 21 in	132	332	332
194737	350-10-4BLE	51 × 43 × 21 in	132	332	332

### Options/Accessories

Part #	Description	Price
115655 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, medical grade power supply	\$43.00
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00




† NEMA 1-15 Plug



†† CEE 7/16 Plug

### Dimensions

	Inches	Centimeters
A	48.50	123.2
B	32.00	81.3
C	2.40	6.1
D	9.30	23.6
E	38.00	96.5
F	45.00	114.3
G	11.42	29.0
H	15.75	40.0

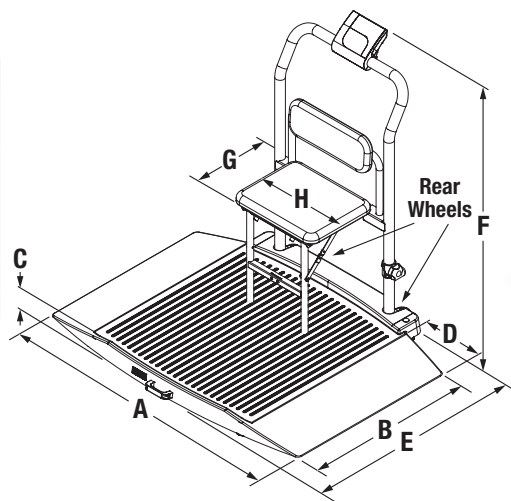

350-10-4 in folded position



### Standard Features

- Large LCD display
- Antimicrobial keypad
- Two wheels for easy transport
- Dual ramp
- Nonslip platform
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

### Specifications

#### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

#### Platform Dimensions Without Ramps:

(L × W × H)  
29.50 × 32.00 × 2.40 in

#### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

#### Battery Type:

Six AA alkaline (included)

#### Battery Use:

25 hours of continuous use with batteries  
Automatic power-off can be configured

#### Cable Length:

7 ft (2.1 m) cable between scale base and indicator

#### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

#### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

#### Warranty:

Two-year limited

### Part Number/Price

Part #	Model #	Capacity	Price
141449	350-10-8	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$2,770.00
194735	350-10-8BLE	1,000 × 0.2 lb (450 × 0.1 kg) WPAN	\$3,070.00

### Shipping Weight

Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
141449	350-10-8	53 × 45 × 7 in	86	121	121
194735	350-10-8BLE	53 × 45 × 7 in	86	121	121

### Options/Accessories

Part #	Description	Price
115655 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, medical grade power supply	\$43.00
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00




† NEMA 1-15 Plug



†† CEE 7/16 Plug


### Dimensions

	Inches	Centimeters
A	48.50	123.2
B	32.00	81.3
C	2.40	6.1
D	9.30	23.6
E	38.00	96.5
F	29.50	74.9

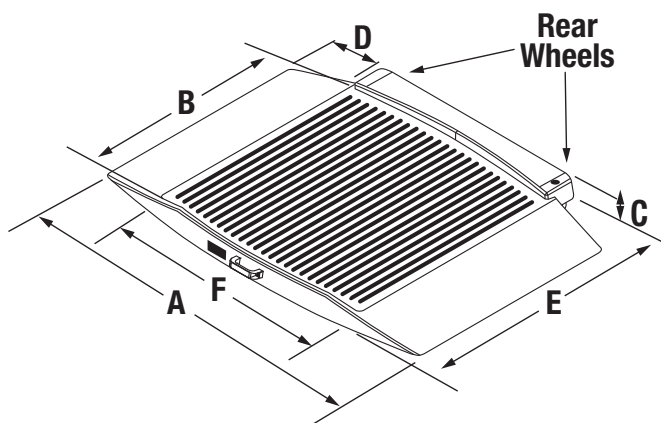

# RL-350-5

Single-ramp Portable Bariatric Wheelchair Scale

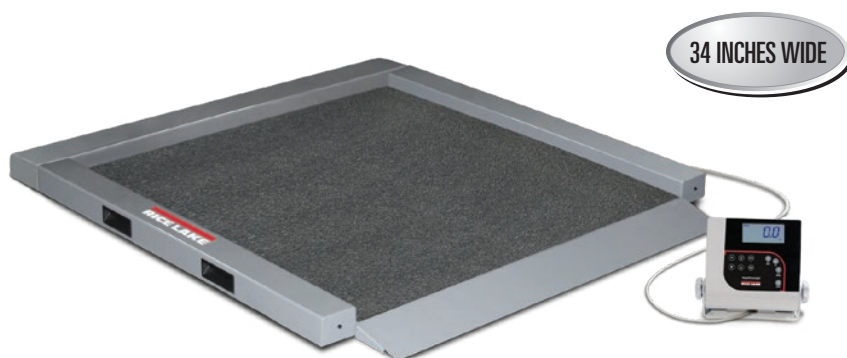

## Standard Features

- Large LCD display
- Antimicrobial keypad
- Integrated handles and wheels for easy transport
- Large, stable scale base
- Metal, nonslip platform
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

## Part Number/Price

Part #	Model #	Capacity	Price
150703	RL-350-5	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$2,925.00
205976	RL-350-5BLE	1,000 × 0.2 lb (450 × 0.1 kg) WPAN	\$3,200.00

## Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
150703	RL-350-5	43 × 43 × 11 in	154	147	154
205976	RL-350-5BLE	43 × 43 × 11 in	154	147	154

## Options/Accessories

Part #	Description	Price
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00




† NEMA 1-15 Plug



†† CEE 7/16 Plug

## Dimensions

	Inches	Centimeters
A	41.00	104.1
B	40.00	101.6
C	2.20	5.6
D	34.00	86.4
E	34.00	86.4
F	3.70	9.4

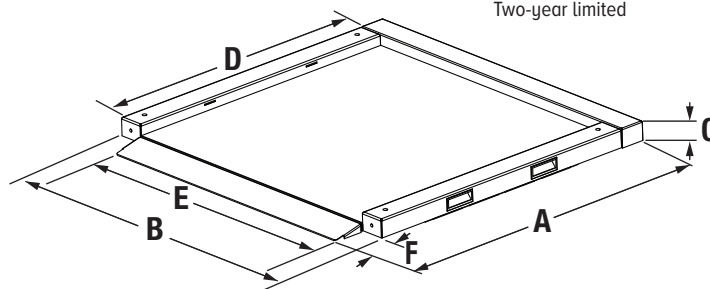

## Specifications

### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

### Platform Dimensions Without Ramp:

(L × W × H)

34.0 × 34.0 × 2.2 in

### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### Battery Type:

Six AA alkaline (included)

### Battery Use:

25 hours of continuous use with batteries  
Automatic power-off can be configured

### Cable Length:

9 ft (2.7 m) cable between scale base and indicator

### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height


### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

### Warranty:

Two-year limited



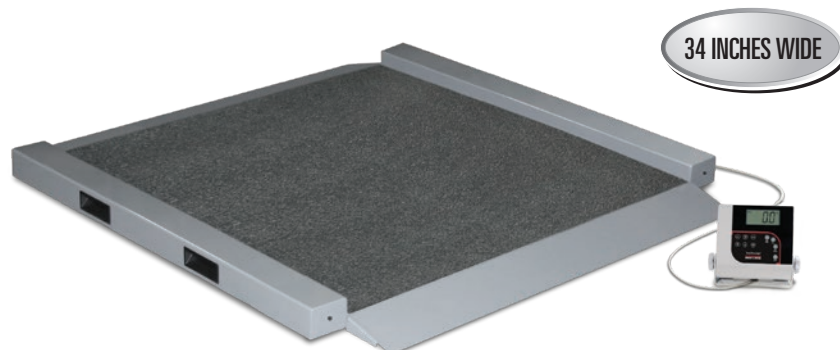

### Standard Features

- Large LCD display
- Antimicrobial keypad
- Integrated handles and wheels for easy transport
- Dual ramp
- Large, stable scale base
- Metal, nonslip platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

### Part Number/Price

Part #	Model #	Capacity	Price
150704	RL-350-6	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$3,000.00
205974	RL-350-6BLE	1,000 × 0.2 lb (450 × 0.1 kg) WPAN	\$3,275.00

### Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
150704	RL-350-6	43 × 43 × 11 in	162	147	162
205974	RL-350-6BLE	43 × 43 × 11 in	162	147	162

### Options/Accessories

Part #	Description	Price
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00
102508 ††	9VDC adapter, 100-240V, CEE 7/16 Plug, medical grade power supply	\$30.00




† NEMA 1-15 Plug



†† CEE 7/16 Plug

### Dimensions

	Inches	Centimeters
A	41.00	104.1
B	40.00	101.6
C	2.20	5.6
D	34.00	86.4
E	34.00	86.4
F	3.70	9.4

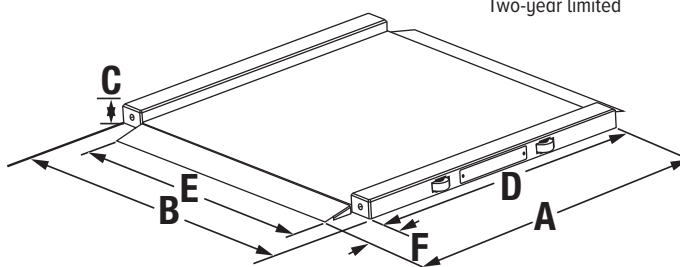

### Specifications

**Capacity:**  
1,000 × 0.2 lb (450 × 0.1 kg)

**Platform Dimensions Without Ramps:**  
(L × W × H)  
34.00 × 34.00 × 2.20 in

**Power:**  
9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

**Battery Type:**  
Six AA alkaline (included)

**Battery Use:**  
25 hours of continuous use with batteries  
Automatic power-off can be configured

**Cable Length:**  
9 ft (2.7 m) cable between scale base and indicator

**Display:**  
5-digit LCD display, 0.75 in (1.9 cm) digit height


**Temperature:**  
Operating:  
50 °F to 104 °F (10 °C to 40 °C)

**Warranty:**  
Two-year limited

# SB-1150 Summit™

Bariatric Wheelchair Scale

HEALTH SCALES

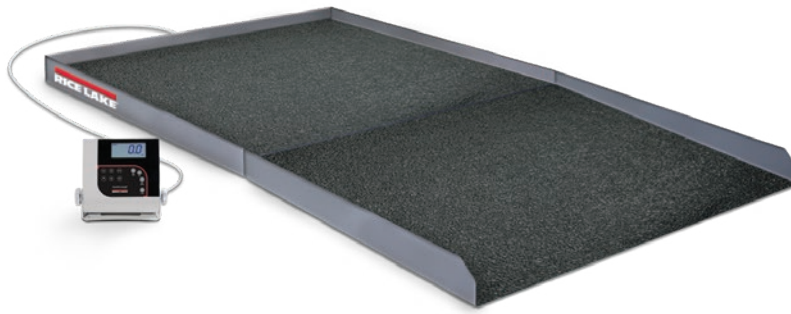

## Part Number/Price

Part #	Model #	Capacity	Price
150706	SB-1150	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$3,185.00
205977	SB-1150BLE	1,000 × 0.2 lb (450 × 0.1 kg) WPAN	\$3,490.00

## Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
150706	SB-1150	49 × 48 × 24 in	363	407	407
205977	SB-1150BLE	49 × 48 × 24 in	363	407	407

## Options/Accessories

Part #	Description	Price
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00




† NEMA 1-15 Plug



†† CEE 7/16 Plug

## Dimensions

	Inches	Centimeters
A	36.00	91.4
B	36.00	91.4
C	28.50	72.4
D	36.00	91.4
E	4.00	10.2
F	1.00	2.5

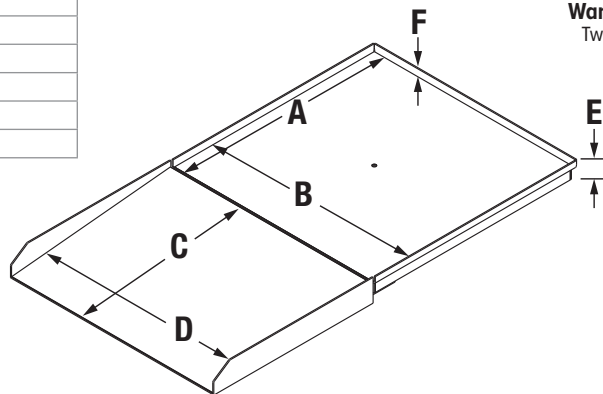

## Standard Features

- Large LCD display
- Antimicrobial keypad
- Heavy-duty mild steel construction
- Single ramp
- Metal, nonslip platform
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

## Specifications

### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

### Platform Dimensions:

(L × W × H)  
36.0 × 36.0 × 4.0 in

### Ramp Dimensions:

(L × W × H)  
36.0 × 28.5 × 4.0 in

### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### Battery Type:

Six AA alkaline (included)

### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

### Cable Length:

10 ft (3.1 m) cable between scale base and indicator

### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

### Warranty:

Two-year limited

# SD-1150-WP

Dialysis Wheelchair Scale

HEALTH SCALES

Wall mounted indicator,  
cable enclosed in customer  
supplied conduit.



In Ground  
Scale Package

## Standard Features

- Package includes scale, pit frame, handrail and indicator
- Large LCD display
- Antimicrobial keypad
- Heavy-duty mild steel construction
- Live handrail for accuracy and patient safety
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

## Specifications

### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

### Platform Dimensions:

(L × W × H)  
36.00 × 36.00 × 3.00 in

### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### Battery Type:

Six AA alkaline (included)

### Battery Use:

25 hours of continuous use with batteries  
Automatic power-off can be configured

### Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

### Cable Length:

10 ft (3.1 m) cable between scale base and indicator

### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

### Warranty:

Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
150707	SD-1150-WP	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$3,245.00
205978	SD-1150-WPBLE	1,000 × 0.2 lb (450 × 0.1 kg) WPAN	\$3,550.00

## Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
150707	SD-1150-WP	40 × 39 × 15 in	246	169	246
205978	SD-1150-WPBLE	40 × 39 × 15 in	246	169	246

## Options/Accessories

Part #	Description	Price
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00




† NEMA 1-15 Plug



†† CEE 7/16 Plug

## Dimensions

	Inches	Centimeters
A	36.00	91.4
B	36.00	91.4
C	3.00	7.6
D	28.50	72.4
E	31.50	80.0
F	37.00	94.0
G	35.50	90.2

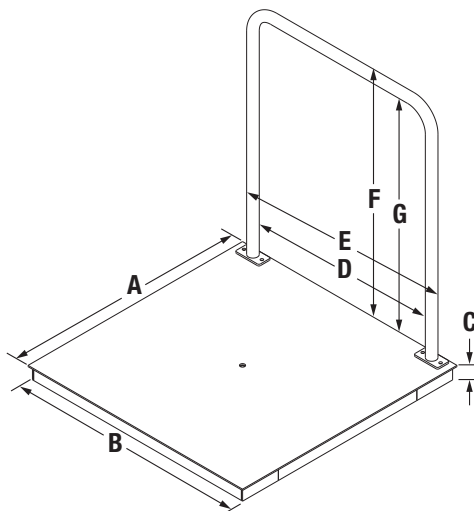

### Pit Frame Concrete Details

*Drawing dimensions shown in inches*


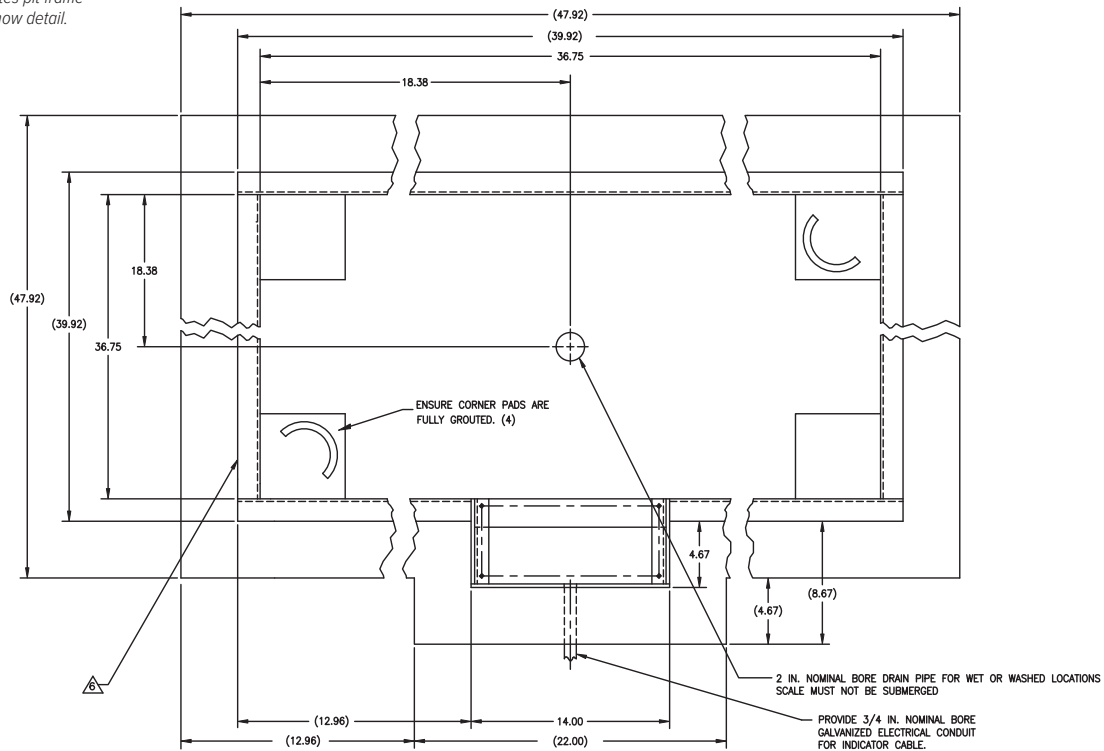


Diagram illustrating the cross-section detail of a concrete curb and gutter assembly. The assembly includes a concrete curb with a top width of 4.00 (TYP) and a height of 4.00. The curb is supported by a base layer with a total thickness of 5.00. The base layer consists of a 4x4 wire mesh (3/16 wire dia.) and a 1/2 inch slope from all sides to drain. The curb is finished with a .75 inch layer on all sides. The existing finished floor is shown on the right, with a typical finish all around.

1. USE CONCRETE OF MINIMUM YIELD STRENGTH 5000 PSI OR 6-BAG MIX.
2. ALLOW 7 DAYS TO CURE. WET CONCRETE PERIODICALLY DURING THIS TIME.
3. DIMENSIONS SHOWN ASSUME FIRM, STABLE SOIL CONDITIONS. WHEN SOIL CONDITIONS ARE NOT ADEQUATE, PLACE FOUNDATION AT SUFFICIENT DEPTH.
4. IN WET OR WASHDOWN APPLICATIONS WE RECOMMEND THE USE OF HERMETICALLY SEALED LOAD CELLS, AND THAT THE JUNCTION BOX BE MOUNTED REMOTELY IN A DRY LOCATION.
5. WIRE MESH TO HAVE MINIMUM .75 COVER BOTTOM AND SIDES.

⚠️ ON STAINLESS STEEL VERSIONS, TWO PIECES OF 2 INCH ANGLE WILL BE SUBSTITUTED FOR THE 4 INCH CHANNEL.

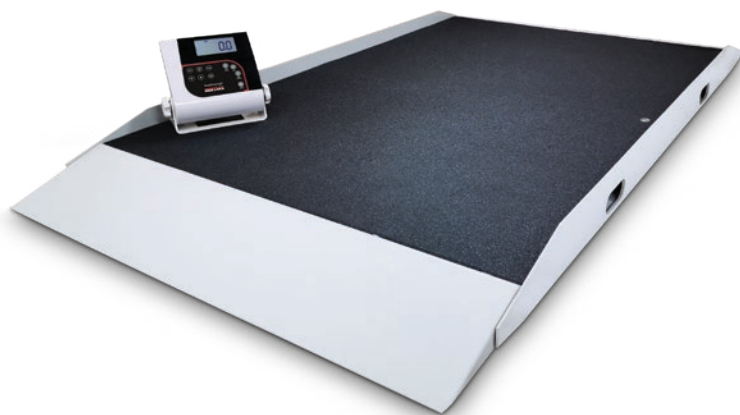

## Standard Features

- Push-button LCD display
- Antimicrobial keypad
- Two wheels for portability
- Dual ramp
- Metal, nonslip platform
- Safety side rails
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

## Specifications

**Capacity:**  
1,000 × 0.2 lb (450 × 0.1 kg)

**Platform Dimensions Without Ramps:**  
(L × W × H)  
49.30 × 32.70 × 2.60 in

**Platform Dimensions with  
Wheels and Ramps:**  
(L × W × H)  
63.80 × 32.70 × 2.60 in

**Power:**  
9 VDC, provided by six AA alkaline batteries  
(included) or AC adapter (optional)

**Battery Type:**  
Six AA alkaline (included)

**Battery Use:**  
25 hours continuous use with batteries  
Automatic power-off can be configured

**Display:**  
5-digit LCD display, 0.75 in (1.9 cm) digit height

**Temperature:**  
Operating:  
50 °F to 104 °F (10 °C to 40 °C)

**Cable Length:**  
7 ft (2.1 m) cable between scale base and indicator

**Warranty:**  
Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
203622	350-10-8S	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$3,350.00
203623	350-10-8SBLE	1,000 × 0.2 lb (450 × 0.1 kg) WPAN	\$3,650.00

## Shipping Weight


Part #	Model #	L × W × H	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
203622	350-10-8S	67.2 × 36 × 6 in	154	104	154
203623	350-10-8SBLE	67.2 × 36 × 6 in	154	104	154

## Options/Accessories

Part #	Description	Price
133077 †	9VDC adapter, 100-240V, NEMA 1-15 Plug, cULus power supply	\$30.00



† NEMA 1-15 Plug



†† CEE 7/16 Plug

## Dimensions

	Inches	Centimeters
A	63.80	162.1
B	49.30	125.3
C	32.70	83.1
D	32.90	83.6
E	3.90	9.9
F	2.60	6.7
G	0.55	1.4

