


Picture is a representation of actual product.

Order Information

Load Rating	Part#	Est. Weight	Price
25 lb	194014	2 lb	Consult
50 lb	194015	2 lb	Consult
75 lb	194016	2 lb	Consult
100 lb	194017	2 lb	Consult
150 lb	194018	2 lb	Consult
250 lb	194019	2 lb	Consult
500 lb	194020	2 lb	Consult

Dimensions

Rated Capacity	A	В	С	D	E	F	G	Н	I	J
Ib/in										
25 to 500	2.81	1.30	0.62	0.26	0.25	0.50	1.81	1.00	1.00	0.50

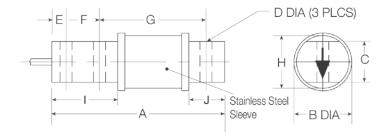

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL60040SST

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

RL50219SS-TA.....page 41

Specifications

Full Scale Output:

3.0 mV/V

Output Resistance:

350 (± 3) ohm

Input Resistance:

380 to 450 ohm

Material/Finish: Stainless steel

Temperature:

Operating: 0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP65

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 VDC

Nonlinearity: 0.03% full scale

Hysteresis:

0.02% full scale **Combined Error:**

0.017% full scale

Insulation Resistance:

5,000 megohm

Cable Length:

20 ft

Cable Color Code:

Red +Excitation Black –Excitation Green +Signal White –Signal

Warranty:

Two-year limited