



Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
300 kg	211636	0.9 kg	Consult
500 kg	211637	0.9 kg	Consult
750 kg	211638	0.9 kg	Consult
1,000 kg	211639	0.9 kg	Consult
1,500 kg	211640	0.9 kg	Consult
2,000 kg	211641	0.9 kg	Consult
3,000 kg	211642	2.2 kg	Consult
5,000 kg	211643	2.2 kg	Consult

Dimensions

Rated Capacity kg/mm	A	B	C	D	E	F	G	H	I	J	K	L	M	N
300 to 2,000	31.5	15.0	34.6	56.0	31.5	130.0	13.5	18.0	M12	76.2	25.4	15.8	6.5	3.5
3,000 to 5,000	48.0	-	37.0	76.0	41.5	171.5	20.5	18.0	-	95.2	38.1	19.0	-	-

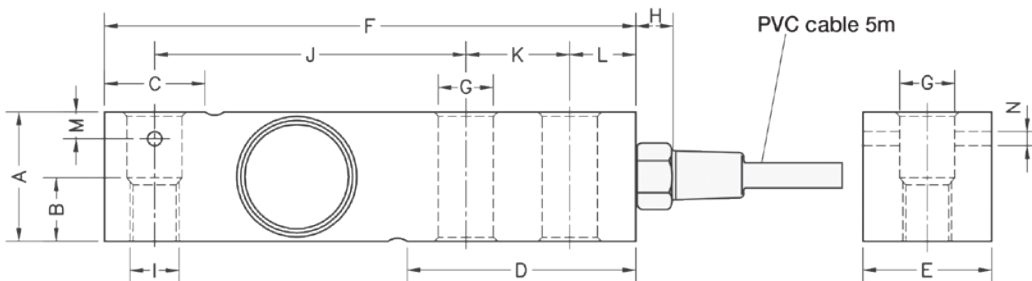

Specifications

Full Scale Output:

2.0 mV/V $\pm$ 0.05%
mV/V/ohm calibration

Output Resistance:

350 ($\pm$ 3) ohm

Input Resistance:

400 ($\pm$ 20) ohm

Material/Finish:

Stainless steel

Temperature:

Compensated:
-14 °F to 104 °F (-10 °C to 40 °C)
Operating:
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Hermetically sealed, IP69K

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

10 VDC (15 V maximum)

Combined Error:

0.017% full scale

Insulation Resistance:

> 5,000 megohm

Deflection at Capacity:

0.2 to 0.4 mm

Cable Length:

5 m

Cable Color Code:

Green +Excitation
Black -Excitation
Red +Signal
White -Signal

Warranty:

Two-year limited

Approvals:

OIML R60/2017-A-NL1-22.11