



Picture is a representation of actual product.

## Approvals




## Order Information

Load Rating	Part #	Est. Weight	Price
15 kg	<b>17544</b>	3 lb	Consult
30 kg	<b>17545</b>	3 lb	Consult
50 kg	<b>17546</b>	3 lb	Consult
75 kg	<b>17547</b>	3 lb	Consult
100 kg	<b>17548</b>	3 lb	Consult
150 kg	<b>36467</b>	3 lb	Consult

## Dimensions

Rated Capacity	H	L	L1	L2	L3	T	T1	W	W1
kg/mm									
15 to 150	40.0	150.0	6.0	19.1	100.0	1/4-20 UNC x 10 DP	1/4-28 UNF x 10 DP	25.4	29.4

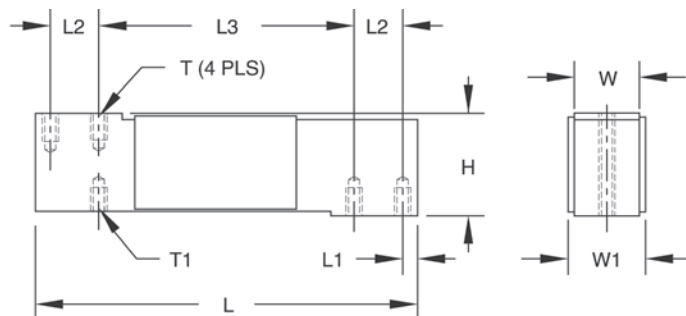

## Interchangeable Products

VPG® TEDEA-HUNTLEIGH®

**1140** ..... page 316

## Specifications

### Full Scale Output:

2.0 mV/V

### Output Resistance:

350 (± 5) ohm, nominal

### Input Resistance:

383 (± 15) ohm

### Material/Finish:

Stainless steel

### Temperature:

Operating:

14 ° F to 104 ° F (-10 ° C to 40 ° C)

Compensated:

14 ° F to 104 ° F (-10 ° C to 40 ° C)

### Seal Type:

Environmentally sealed, IP65

### Safe Overload:

200% at center loading point, full scale

### Rated Excitation:

5 to 10 VDC (15 V maximum)

### Combined Error:

0.02% full scale

### Insulation Resistance:

2,000 megohm

### Deflection at Capacity:

0.4 mm

### Cable Length:

10 ft

### Cable Diameter:

0.200 in PVC jacket

### Cable Color Code:

Green +Excitation

Black -Excitation

Red +Signal

White -Signal

Blue +Sense

Brown -Sense

### Max Platform Size:

15.75 x 15.75 in

### Warranty:

Two-year limited

### Approvals:

cFMus