

# RL1200 EM

Electromechanical Portable Beam Scale and 380 Indicator

FLOOR SCALES



## Approvals



Measurement  
Canada  
Approved




## Part Number/Price

Part #	Overall Size (W x L x H)	Capacity	Est. Weight	Price
216112	Portable beam with 380 Synergy	1,000 x 0.5 lb	200 lb	Consult

## Options/Accessories

Part #	Description	Price
206433†	380 indicator external AC adapter	Consult

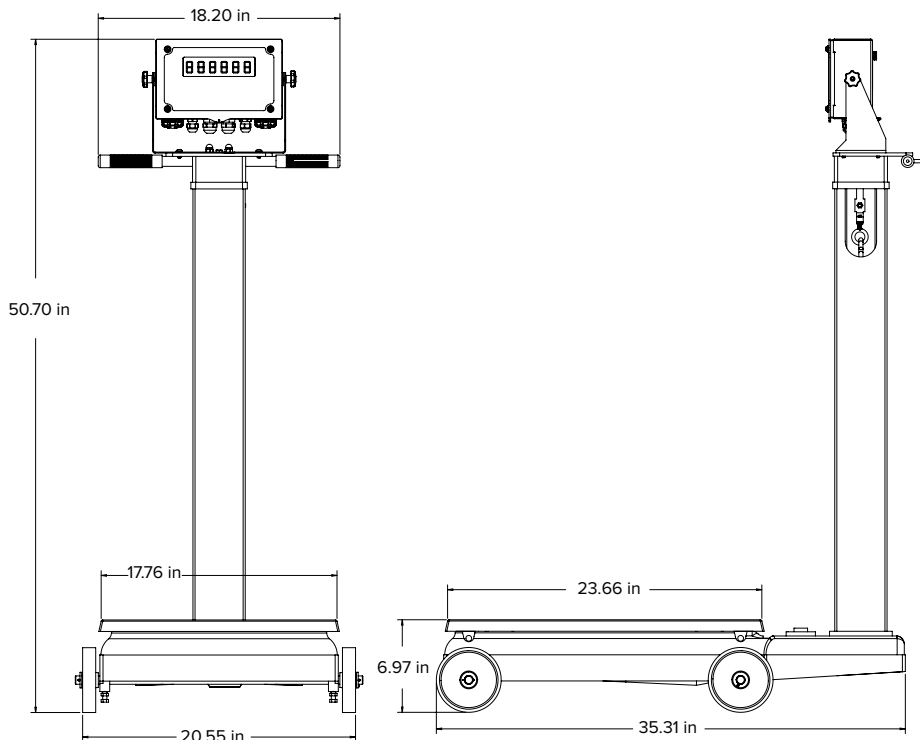

## Standard Features

### Scale

- NTEP Certified
- 1,000 lb capacity
- Heavy-duty wheels and handle for portability

### 380 Indicator

- LCD display
- Alkaline battery powered
- Push-button and keyed tare
- Two communication ports
- Five tactile buttons
- Configurable print formats

## RL1200 EM Specifications

### Construction:

Cast-iron platform, base and levers

### Platform Dimensions:

(L x W) 24 x 18 in

### Capacity:

1,000 lb

### Approvals:

NTEP 93-004 Class III 2,000 d

### Warranty:

One-year limited

## 380 Specifications

### Power:

Batteries: 4 alkaline C-cell (not included)  
Optional: 115/230 VAC to 12 VDC adapter

### Battery Life:

100 hours with 1 x 350 ohm load cell, no backlight  
45 hours with 4 x 350 ohm load cells, low backlight  
20 hours with 8 x 350 ohm load cells, low backlight

### Communication Ports:

One RS-232 (three-wire)  
One USB 2.0

### Annunciators:

g, lb, t, tn, kg, oz, battery level, PT, LT, gross, zero, unstable, net

### Display:

Six 1 in (25 mm) tall, LCD digits

### Keys/Buttons:

Five tactile buttons

### Rating/Material:

IP66, 304 Stainless steel

### Approvals:

NTEP 21-051, Class III/IIIL, 10,000 d  
Measurement Canada AM-6184  
cULus  
CE marked