

Approvals



Part Number/Price


Part #	Model #	Capacity	Price
204399	Rice Lake VS-32 Single Ramp	1,000 × 0.2 lb (450 × 0.1 kg) with USB	Consult

Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204399	Rice Lake VS-32 Single Ramp	43	43	11	154	147	154

Dimensions

	Inches	Centimeters
Α	41.1	104.1
В	40.0	101.6
С	2.2	5.6
D	34.0	86.4
Е	34.0	86.4

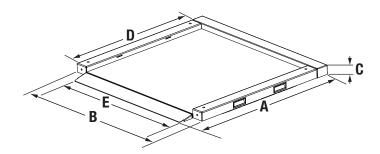

Standard Features

- Single ramp
- Nonslip platform
- Push-button LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- · Communication via USB
- · Tare function
- · Hold function
- · Factory calibrated

Specifications

Capacity:

 $1,000 \times 0.2$ lb (450 × 0.1 kg)

Platform Dimensions Without Ramps:

(L × W × H) 34.0 × 34.0 × 2.22 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries Automatic power-off can be configured

Operating Temperature: 50 °F to 104 °F (14 °C to 40 °C)

Cable Length:

9 ft (2.7 m) cable between scale base and indicator

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited