

Picture is a representation of actual product

Approvals






Order Information

Load Rating	Part#	Est. Weight	Price	
1,000 lb	68827	3 lb	Consult	
2,500 lb	68826	3 lb	Consult	

Dimensions

Rated Capacity	A1	A2	А3	В	С	D	E	F	G
lb/in									
1,000 to 2,500	1/2-20 UNF	0.62	0.53	1.25	1.25	5.12	1.00	3.00	0.50

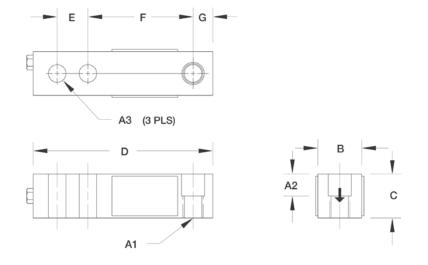

Interchangeable Products

PENNSYLVANIA®

65023A-XX-5141

Specifications

Full Scale Output:

3.0 mV/V

mV/V/ohm calibrated

Output Resistance:

349 to 355 ohm

Input Resistance:

343 to 357 ohm Material/Finish:

High-alloy steel, nickel plated

Temperature:

Compensated: 14 °F to 104 °F (-10 °C to 40 °C)

Operating:

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP67

Safe Overload: 150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5 to 10 V

Combined Error:

0.02% full scale **Insulation Resistance:**

5,000 megohm

Deflection at Capacity: 1,000 lb: 0.013 in

2,500 lb: 0.015 in

Cable Length: 10 ft

Cable Diameter:

0.200 in

Polyurethane jacket

Cable Color Code:

Red +Excitation

Black -Excitation

Green +Signal White –Signal

Warranty:

One-year limited

Approvals:

NTEP cFMus