
920i° Universal Indicator/Controller Power Supply

Part Number/Price

| Ref# | Part# | Description | Price |
|------|--------|---|---------|
| 14 | 14822 | Machine screws, 4 - 40 NC x 1/4 | Consult |
| 25 | 15134 | Lock washers, no. 8, type A | Consult |
| 26 | 14626 | Nut, KEP, 8 - 32 NC | Consult |
| 27 | 45043 | Ground wire, 4" with no. 8 eye connector | Consult |
| 32 | 67796 | Power supply cable assembly, to CPU board | Consult |
| 32 | 186464 | Power supply cables for display retrofit | Consult |
| 33 | 68662 | Ribbon cable to interface board universal | Consult |
| 35 | 15650 | Cable tie mounts, 3/4" | Consult |
| 45 | 67869 | Interface board PS2/DB-9 | Consult |
| | 111109 | Interface board USB (requires Rev. L CPU) | Consult |
| 46 | 14832 | Machine screws, 4 - 40 NC x 3/8 | Consult |
| 54 | 70069 | 3V Lithium coin battery | Consult |
| 55 | 69898 | Nylon spacers | Consult |



The LED backlight display can be used with green CPU board Rev N or older by replacing the power supply cable. Universal 186464 (AC) 186464 (DC); Deep universal 186278 (AC) 187603 (DC); Panel 186278 (AC) 187603 (DC); Wall 186760 (AC) 188345 (DC); Two-slot expansion for wall 188716 (AC) 189724 (DC); Two-slot expansion panel for deep universal 188717 (AC) 189725 (DC); Six-slot expansion for wall 188774 (AC). (See Diagram 920i-E)

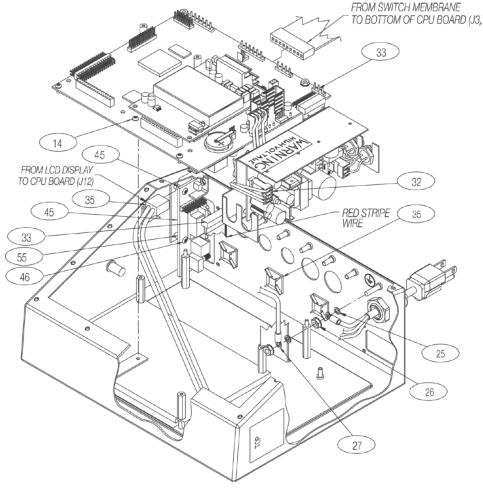

920i-E