

Ishida Astra II

Price Computing Scale with Printer



Approvals



Part Number/Price

Part #	Model	Capacity	Est. Weight	Price
185822	Astra II Bench	30 × 0.01 lb	25 lb	Consult
185823	Astra II Pole	30 × 0.01 lb	25 lb	Consult
190641	Astra II Lite software CD (available for download at www.ricelake.com)			N/C
190642	Astra II Lite license file (for one computer only, not transferable)			Consult

Options/Accessories

Part #	Description	Price
47977	Produce platter (sits on top platter included with scale)	Consult
47976	Fish platter (sits on top platter included with scale)	Consult
47341	Continuous roll thermal journal paper, 64 mm W × 50 m L (for reports only)	Consult
184273*	Technical manual	Consult
184270*	Additional operating manual	Consult
184274*	Additional operation card	Consult
170916	Additional operator keysheet insert	Consult
Label Stock		
47732	2.36 × 1.73 in (60 × 44 mm)	Consult
47733	2.52 × 1.85 in (64 × 47 mm)	Consult
47735	2.52 × 2.32 (64 × 59 mm)	Consult
47736	Pre-printed safe handling instructions, 2.52 × 2.32 in (64 × 59 mm)	Consult
47743***	Extended text, 2.52 × 3.34 in (64 × 85 mm)	Consult
47745	Pre-printed safe handling instructions on top of label, 2.52 × 3.34 in (64 × 85 mm)	Consult
47753	Blank 2.52 × 1.46 in (64 × 37 mm)	Consult
47754	Blank 2.52 × 1.85 in (64 × 47 mm)	Consult
47761	Continuous strip label stock 2.25 × 121 in (64 × 37,000 mm)	Consult
47762	Non-bar code, 2.52 × 2.32 in (64 × 37 mm)	Consult
105346	Blank 2.52 × 3.34 in (64 × 85 mm)	Consult

Label stock, please consult factory for case quantity pricing. Examples shown on page 911
Labels sold by the case-12 rolls per case.

* Manuals and software programs can be downloaded at www.ricelake.com

*** Safe handling instructions can also be printed by scale

Standard Features

- Programmable function keys
- Blue alphanumeric LCD display
- Convenient side-loading label feature
- Wired Ethernet
- Customer display

Specifications

Power:

AC 100 to 240 V, 50/60 Hz

Power Consumption:

Standby: 50 W

In operation: 100 W

Resolution:

Display: 3,000 divisions

Communication Ports:

Ethernet: TCP/IP 10/100 Base-T

USB: data backup and restore

Memory Capacity:

2 MB

Annunciators:

Net, zero, save, auto

Display:

Blue alphanumeric LCD display (23 digits, 16 segments)

Display Items:

Tare: four-digits

Unit price: five-digits

Total price: six-digits

Keys/Buttons:

84 one-touch preset keys, 168 presets (assign two items/key)

Printing Speed:

3.9 in (100 mm) per second

Printing:

Direct thermal 2.2 in (56 mm) (448 dot, 8 dot/mm)

Label Size:

Width: 1.5 to 2.5 in (38 to 64 mm)

Length: 1.2 to 6.9 in (30 to 175 mm)

Label Roll:

Inside diameter: 1.6 in (40 mm)

Outside diameter: 3.9 in (100 mm)

Label Backing Paper:

Width: Up to 2.6 in (66 mm)

Temperature :

Certified: 14 °F to 104 °F (-10 °C to 40 °C)

Warranty:

One-year limited

Approvals:

NTEP 07-005


UL

Ishida Astra II

Price Computing Scale with Printer

Dimensions

Astra II			
Bench Unit			
A	17.2 in (437 mm)	F	6.3 in (160 mm)
B	10.5 in (266 mm)	G	14.6 in (370 mm)
C	16.1 in (410 mm)		

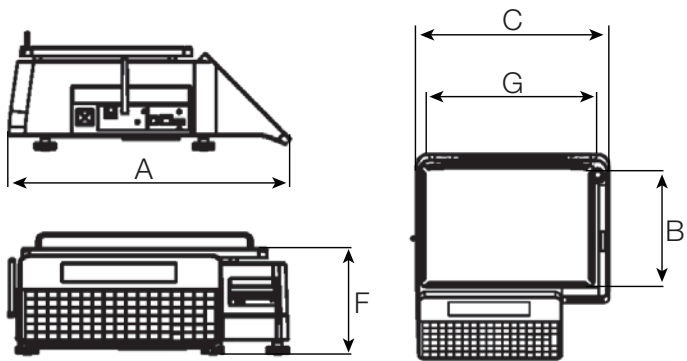

Astra II			
Pole Unit			
A	17.2 in (437 mm)	E	20.6 in (524 mm)
B	10.5 in (266 mm)	F	6.3 in (160 mm)
C	16.1 in (410 mm)	G	14.6 in (370 mm)
D	19.7 in (500 mm)		

