

# Ishida Uni-3RP

Remote Scale Base



Uni-3L2i pictured with remote scale base and optional wrap station components (47672, 47670, 53963, 46927)

## FEATURES

- Simple, durable and robust design
- Fixed side-load cassette with virtual function
- Prints safe handling instructions, country of origin, 2020 nutrition, custom text messages, custom images and more
- Batch printing
- Dynamically generated QR code printing
- Backlit alphanumeric LCD display
- Programmable tactile preset keys
- Flash ROM for simple update of application firmware
- Fully compliant with RoHS regulations for a completely lead-free machine
- Optional Wi-Fi kit (factory installation recommended)
- Optional linerless kit
- Compatible with third-party software, including Upshop 360®, ADC's InterScale®, Invafresh's ePlum®, Toast®, Square® and Droste®



Uni-3L1 display



Uni-3L2 display



Uni-3L1i remote base with bench scale



## SPECIFICATIONS

<p><b>Power:</b> 100 to 240 VAC, 50/60 Hz</p> <p><b>Power Consumption:</b> In operation: 100 W Stand-by: 50 W</p> <p><b>Resolution:</b> 3,000 display divisions maximum</p> <p><b>Communications:</b> LAN Static/DHCP Optional Wi-Fi 802.11a/b/g/n/ac - 2.4 GHz/5 GHz Security: WEP/WPA/WPA2</p> <p><b>Input/Output:</b> LAN USB-A (service, transaction data)</p>	<p><b>Operating System:</b> VxWorks</p> <p><b>Memory Capacity:</b> Flash ROM 2 MB</p> <p><b>Preset Keys:</b> 84 programmable tactile preset keys (168 presets when assigning two items per key) 18 tactile function keys</p> <p><b>Display:</b> Operator: L1, LCD, blue backlight, alphanumeric (23 digits 16 seg) L2: LCD, green backlight, alphanumeric (192 × 16 dots + 23 digits 7 seg) Unit price: five digits Tare: four digits Weight: five digits Total price: six digits</p>	<p><b>Printer:</b> Printhead: 2.2 in (56 mm) direct thermal, effective 2.2 in (56 mm) Resolution: 200 dpi (8 dot/mm) Speed: 3.9 in/sec (100 mm/sec) max Min. weight: 0.015 lb (0.006 kg) Formats: customizable, up to 999 Barcodes: UPC, JAN, EAN, EAN128, CODE128, ITF, GSI</p> <p><b>Label Size:</b> Type: Die-cut, continuous, optional linerless label with kit Width: 1.5 to 2.5 in (38 to 64 mm) Length: 1.2 to 6.9 in (30 to 175 mm)</p> <p><b>Label Roll:</b> I.D.: 1.6-in (40 mm) min O.D.: 3.9-in (100 mm) max Backing width: 2.6-in (66 mm) max</p>	<p><b>Platter:</b> 15.5 × 9.5 in (394 × 241 mm)</p> <p><b>Weight:</b> Approx. 47 lb (21.3 kg)</p> <p><b>Temperature:</b> Operating: 32 °F to 104 °F (0 °C to 40 °C)</p> <p><b>Humidity:</b> 20 to 85% RH (without condensation)</p> <p><b>Warranty:</b> One-year limited</p> <p><b>Approvals:</b> NTEP 07-005 cULus Listed</p>
--	---	--	--



## PART NUMBER/PRICE

PART #	MODEL/DESCRIPTION	SINGLE-RANGE CAPACITY	DUAL-RANGE CAPACITY	EST. SHIP WEIGHT	PRICE
170316	Uni-3L1i Bench with remote base	0 to 30 × 0.01 lb	0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb	45 lb	Consult
170318	Uni-3L2i Bench with remote base	0 to 30 × 0.01 lb	0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb	45 lb	Consult

# Ishida Uni-3RP

Remote Scale Base

## OPTIONS/ACCESSORIES

PART #	DESCRIPTION	PRICE
47670	Wrap station base, (W × D × H) 22 × 23 × 32 in	Consult
47672	Wrap station left wing, (W × D) 14 × 22 in	Consult
46927	Wrap station right wing, (W × D) 14 × 22 in	Consult
53962	Wrap station right wing with hood, (W × D) 14 × 34 in	Consult
101139	Wrap station white-poly scale shelf (recommended when using optional right wing with hood, PN 53962)	Consult
53963	Wrap station all-purpose center shelf, (W × D) 24 × 15 in	Consult
53866	Wrap station heat pad cover replacement, (W × D) 15 × 6 in	Consult
104948	Scale base alignment plate	Consult
155176	Day Glow label dispenser for PN 47670	Consult
151761	Day Glow label dispenser spacer, pack of ten	Consult
160906	USB flash memory device, 1 GB	Consult
170541	Linerless kit	Consult

## COMMUNICATION


PART #	DESCRIPTION	PRICE
168751*	ScaleLink Pro 5 Lite license file, one license required per computer	Consult
152628*	ScaleLink Pro 5 license file, one license required per computer	Consult
227832	Internal wireless communication 802.11a/b/g/n/ac 2.4 GHz/5 GHz (factory installation recommended)	Consult
78860	Cross cable, Ethernet CAT5, 6 ft	Consult

\*Software key is provided after purchase and online registration is completed at [www.ricelake.com/ishida-software-form](http://www.ricelake.com/ishida-software-form)


NOTE: Manuals and software programs can be downloaded from the distributor section of [www.ricelake.com/retail](http://www.ricelake.com/retail)

## DIMENSIONS


Uni-3 Bench			
A	17.2 in (437 mm)	F	6.3 in (159 mm)
B	10.5 in (266 mm)	G	14.5 in (368 mm)
C	15.9 in (404 mm)		

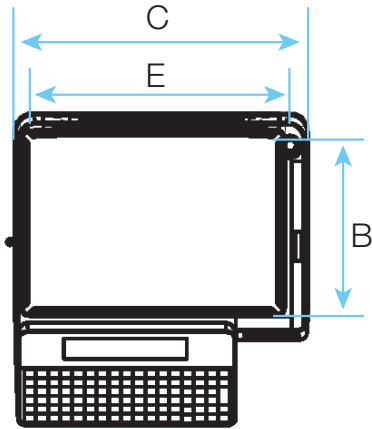

Top

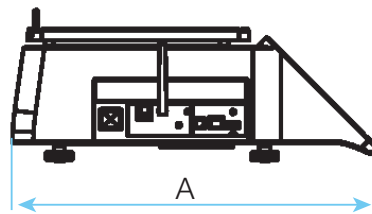


Left Side

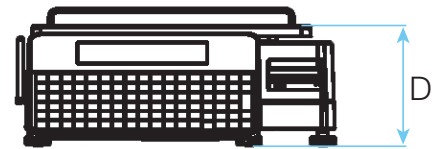

Front

## DIMENSIONS

Remote Scale Base			
D	3.7 in (95 mm)	G	13.8 in (350 mm)
E	15.7 in (400 mm)	H	7.9 in (200 mm)
F	10.0 in (254 mm)		

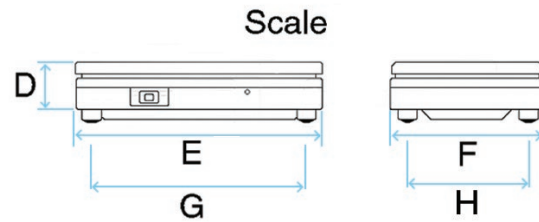

Scale

MULTI-PURPOSE  
RETAIL SCALES

PRICE COMPUTING  
SCALES

PRICE COMPUTING  
PRINTING SCALES

LABELERS

WRAPPING  
SYSTEMS

SOFTWARE

ACCESSORIES

POWER  
CONDITIONING

RETAIL  
LABELS

WARRANTY