

Limited Stock Available



Uni-7RP pictured with remote scale base and optional wrap station components (47670, 47672, 53962, 101139)

# Ishida Uni-7RP

Remote Scale Base

## FEATURES

- Simple, durable and robust design
- Removable front-load cassette, with up to seven cassette configurations
- Prints safe handling instructions, country of origin, 2020 nutrition, custom text messages, custom images and more
- Batch printing
- Graphic-based QR code printing
- Customizable color touchscreen with adjustable viewing angle and tactile keypad
- Assign color images to preset keys
- Programmable tactile preset keys
- Flash ROM for simple update of application firmware
- Fully compliant with RoHS regulations for a completely lead-free machine
- Optional linerless kit
- Compatible with third-party software, including Upshop 360°, ADC's InterScale®, Invafresh's ePlum®, Toast®, Square® and Droste®



Uni-7RP label cassette



Uni-7RP operator screen



Uni-7RP remote base



## SPECIFICATIONS

<p><b>Power:</b> 100 to 240 VAC, 50/60Hz</p> <p><b>Power Consumption:</b> In operation: 100W Stand-by: 50W</p> <p><b>Resolution:</b> 3,000 display divisions maximum</p> <p><b>Communications:</b> LAN Wi-Fi 802.11a/b/g/n/ac 2.4 GHz/5 GHz Security: WEP/WPA/WPA2</p> <p><b>Input/Output:</b> LAN USB-A (service, transaction data) Two RJ11 SD card (expanded storage, 8 GB max)</p>	<p><b>Operating System:</b> VxWorks</p> <p><b>Memory Capacity:</b> Flash ROM 4MB expandable to 2GB</p> <p><b>Preset Keys:</b> 99 programmable pages, 20 PLUs each 60 programmable tactile preset keys 24 tactile function keys</p> <p><b>Display:</b> Operator: touch panel, color 7-in LCD Customer: no display Unit price: six digits Tare: four digits Weight: five digits Total price: eight digits</p>	<p><b>Printer:</b> Printhead: 2.2 in (56 mm) direct thermal, effective 2.2 in (56 mm) Resolution: 200 dpi (8 dot/mm) Speed: 4.7 in/sec (120 mm/sec) max Min. weight: 0.015 lb (0.006 kg) Formats: customizable, up to 999 Barcodes: UPC, JAN, EAN, EAN128, CODE128, ITF, GS1, Custom</p> <p><b>Label Size:</b> Type: Die-cut, continuous Width: 1.2 to 2.5 in (30 to 64 mm) Length: 0.8 to 7.9 in (20 to 200 mm)</p> <p><b>Label Roll:</b> I.D.: 1.6-in (40 mm) min O.D.: 3.9-in (100 mm) max Backing width: 2.6-in (66 mm) max</p>	<p><b>Platter:</b> 15.5 × 9.5 in (394 × 241 mm)</p> <p><b>Weight:</b> Approx. 33 lb (15 kg)</p> <p><b>Temperature:</b> Operating: 23 °F to 95 °F (-5 °C to 35 °C)</p> <p><b>Humidity:</b> 20 to 85% RH (without condensation)</p> <p><b>Warranty:</b> One-year limited</p> <p><b>Approvals:</b> NTEP 07-099 cULus Listed</p>
--	---	---	--



## PART NUMBER/PRICE

PART #	MODEL/DESCRIPTION	SINGLE-RANGE CAPACITY	DUAL-RANGE CAPACITY	EST. SHIP WEIGHT	PRICE
120673	Uni-7RP scale with internal RF, no customer display	0 to 30 × 0.01 lb	0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb	45 lb	Consult

# Ishida Uni-7RP

Remote Scale Base

## OPTIONS/ACCESSORIES

PART #	DESCRIPTION	PRICE
167774	In-use cover, operator keyboard	Consult
47670	Wrap station base, (W × D × H) 22 × 23 × 32 in	Consult
47672	Wrap station left wing, (W × D) 14 × 22 in	Consult
46927	Wrap station right wing, (W × D) 14 × 22 in	Consult
53962	Wrap station right wing with hood, (W × D) 14 × 34 in	Consult
101139	Wrap station white-poly scale shelf (recommended when using optional right wing with hood, PN 53962)	Consult
53963	Wrap station all-purpose center shelf, (W × D) 24 × 15 in	Consult
104948	Scale base alignment plate	Consult
110996	Additional label cassette	Consult
153320	Linerless label cassette	Consult
155176	Day Glow label dispenser for PN 47670	Consult
151761	Day Glow label dispenser spacer, pack of ten	Consult
91870	Compact flash card for expanded memory, 32 MB, for CPU board version PK-260A	Consult
174110	SD memory card, 2 GB, for CPU board version PK-260B	Consult
160906	USB flash memory, 1 GB	Consult

## COMMUNICATION


PART #	DESCRIPTION	PRICE
152628*	ScaleLink Pro 5 license file, one license required per computer	Consult
78860	Cross cable, Ethernet CAT5, 6 ft	Consult

\*Software key is provided after purchase and online registration is completed at [www.ricelake.com/ishida-software-form](http://www.ricelake.com/ishida-software-form)


NOTE: Manuals and software programs can be downloaded from the distributor section of [www.ricelake.com/retail](http://www.ricelake.com/retail)

## DIMENSIONS


Uni-7 Bench					
A	16.4 in (417 mm)	D	15.7 in (398 mm)	G	6.8 in (173 mm)
B	18.3 in (464 mm)	E	5.3 in (134 mm)	H	10.8 in (275 mm)
C	11.7 in (296 mm)	F	6.2 in (157 mm)	I	11.8 in (298 mm)

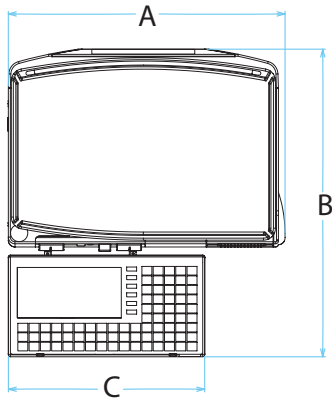

Top




Front



Right Side

## DIMENSIONS

Remote Scale Base			
D	3.7 in (95 mm)	G	13.8 in (350 mm)
E	15.7 in (400 mm)	H	7.9 in (200 mm)
F	10.0 in (254 mm)		

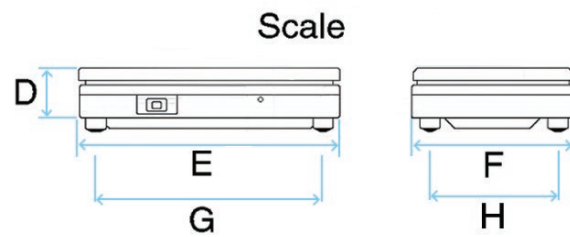

MULTI-PURPOSE  
RETAIL SCALES

PRICE COMPUTING  
SCALES

PRICE COMPUTING  
PRINTING SCALES

LABELERS

WRAPPING  
SYSTEMS

ACCESSORIES  
SOFTWARE

POWER  
CONDITIONING

RETAIL  
LABELS

WARRANTY