

LOAD CELL

PL9110

Stainless Steel, Hermetically Sealed, IP68

ONBOARD WEIGHING




Specifications

- Full Scale Output:**
2.0 mV/V
- Output Resistance:**
700 (nominal)
- Input Resistance:**
736 (nominal)
- Material/Finish:**
Stainless steel
- Temperature:**
14°F to 104°F (-10°C to 40°C)
- Rated Excitation:**
5-15VDC
- Non-linearity:**
±0.03% full scale
- Insulation Resistance:**
5,000 mega ohms at 50VDC
- Seal Type:**
Hermetically sealed, IP69
- Cable Length:**
25 ft
- Wire Color Code:**
Red - Excitation +
Green - Signal +
Black - Excitation -
White - Signal -
Yellow - Shield
- Warranty:**
One-year limited warranty

Order Information

Picture is a representation of actual product

Load Rating	Part#	Est. Weight	Price
Static 2,000 lbs	204610	6 lb	Consult
Static 5,000 lbs	204611	6 lb	Consult
Static 10,000 lbs	204612	6 lb	Consult
Static 20,000 lbs	204613	6 lb	Consult

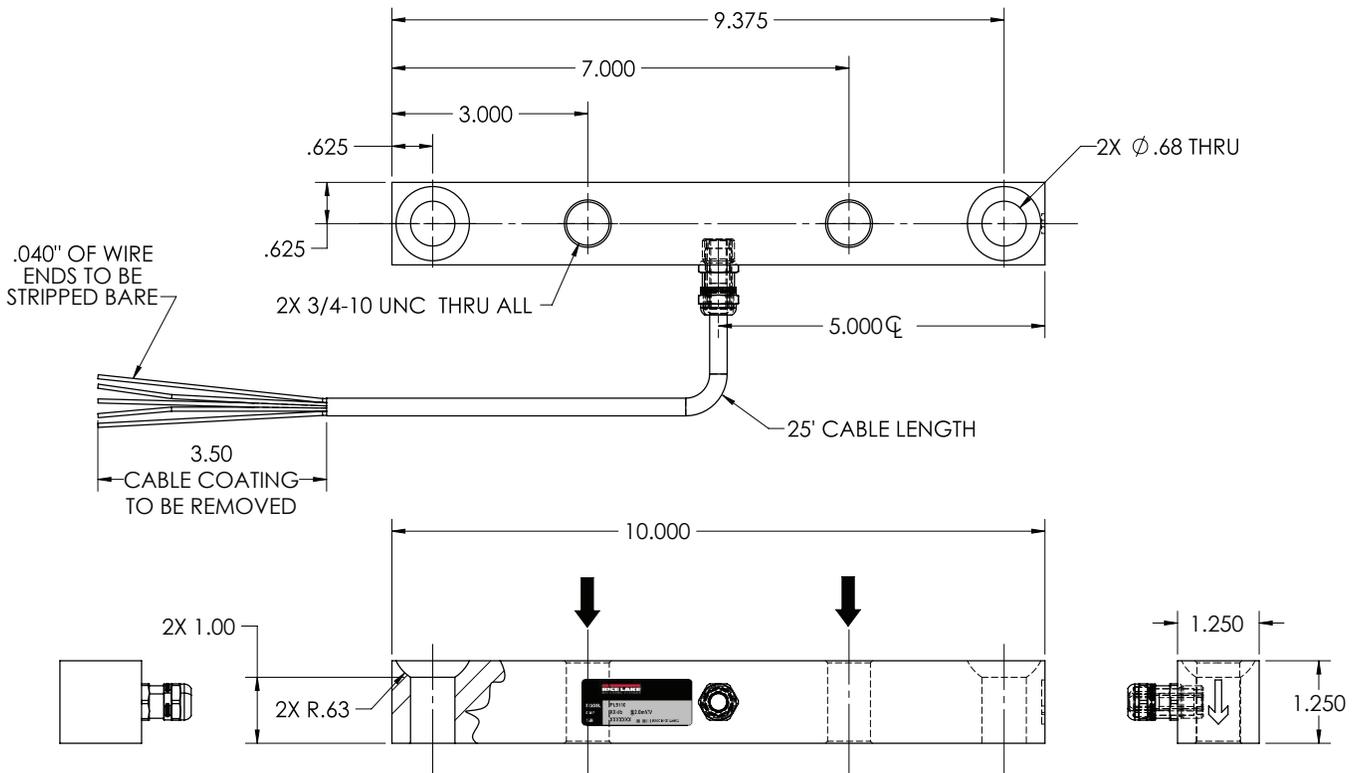

www.ricelake.com | Phone: 800-472-6703

RICE LAKE