

## Specifications

**Full Scale Output:**

2.0 mV/V

**Output Resistance:**

700 (nominal)

**Input Resistance:**

736 (nominal)

**Material/Finish:**

Stainless steel

**Temperature:**

14°F to 104°F (-10°C to 40°C)

**Rated Excitation:**

15VDC (5-10V recommended)

**Non-linearity:**

±0.25% full scale

**Insulation Resistance:**

5,000 mega ohms at 50VDC

**Seal Type:**

Hermetically sealed, IP69

**Cable Length:**

25 ft

**Wire Color Code:**

Red - Excitation +  
 Green - Signal +  
 Black - Excitation -  
 White - Signal -  
 Yellow - Shield

**Warranty:**




One-year limited warranty



## Order Information

*Picture is a representation of actual product*

Load Rating	Part #	Est. Weight	Price
25,000 lb	<b>209603</b>	25 lb	Consult
35,000 lb	<b>210812</b>	25 lb	Consult

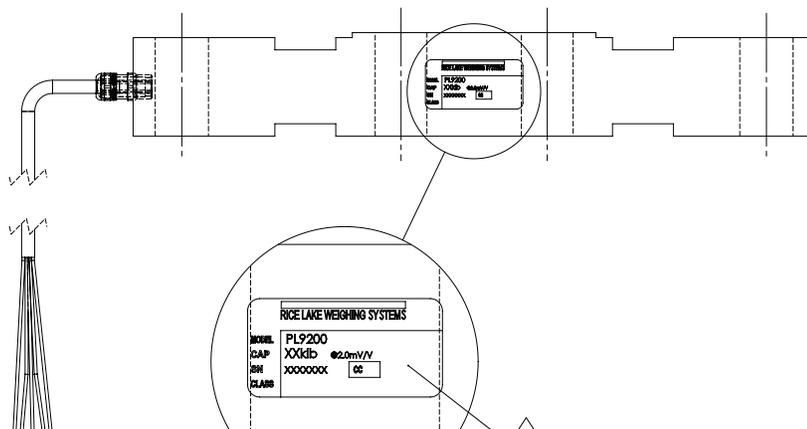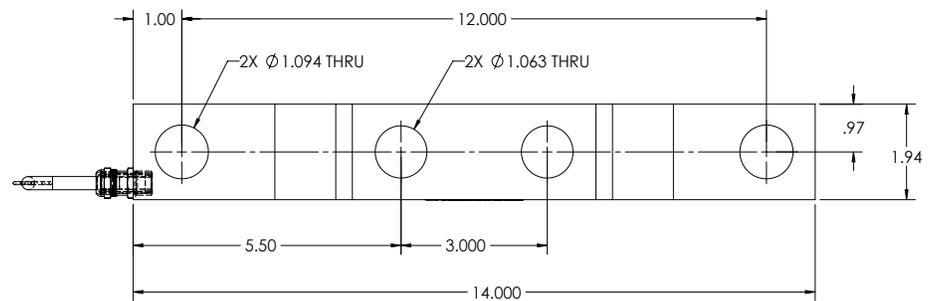

DETAIL A  
SCALE 1 : 1