



Picture is a representation of actual product.

Approvals






Order Information

Load Rating	Part #	Est. Weight	Price
30 ft Cables			
10,000 lb	45466	6 lb	Consult
Replacement load pins			
Rocker pin	108612	1 lb	Consult
Rocker pin	130408	1 lb	Consult
Rocker pin	131376	1 lb	Consult
O-ring (two per pin)	108202	1 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G	H	I	K	L
10,000 lb/in	1.68	3.75	1.50	0.88	1.06	1.38	0.44	0.75	6.87	1.68	3.03

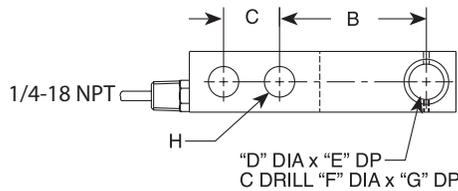

Interchangeable Products

- METTLER-TOLEDO®
TB600529-500 lb
- METTLER-TOLEDO
TB600363-1,250 lb
- METTLER-TOLEDO
TB600342-2,500 lb
- METTLER-TOLEDO
TB600343-5,000 lb
- METTLER-TOLEDO
TB600364-10,000 lb
- HBK®
THC

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS
RLTM..... page 46

Specifications

Full Scale Output:
2.0 mV/V, ±0.002 mV/V

Bridge Resistance:
350 ohm, nominal

Material/Finish:
Stainless steel

Temperature:
Compensated range
14 °F to 104 °F (-10 °C to 40 °C)
Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:
Welded-seal, IP67

Safe Overload:
150% full scale

Safe Sideload:
100% full scale

Rated Excitation:
5 to 10 VDC (15 V maximum)

Combined Error:
0.03%

Non-repeatability:
0.01% full scale

Insulation Resistance:
5,000 megohm

Cable Length:
30 ft

Cable Diameter:
0.190 in polyurethane jacket

Deflection at Capacity:
500 to 2,500 lb: 0.010 in
5,000 to 10,000 lb: 0.012 in

Cable Color Code:
Green +Excitation
Black -Excitation
White +Signal
Red -Signal
Yellow Shield

Warranty:
Two-year limited

Approvals:
FM
NTEP 06-023

**RICE LAKE
LOAD CELLS**