


# RoughDeck® QC-X

Quick Clean Extreme Lift Floor Scale with Solid Plate Base



Approvals

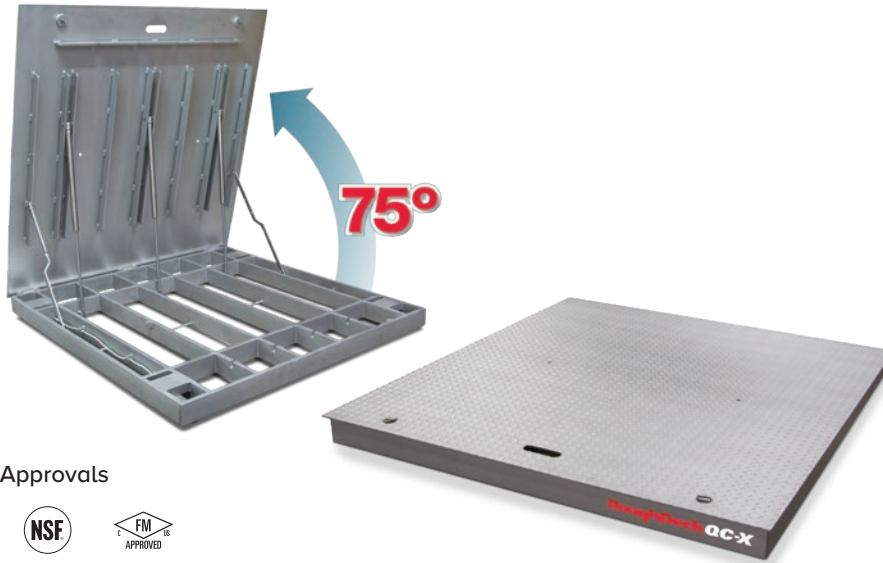

## Part Number/Price

Part #	Size (W × L × H)	Capacity	Est. Weight	Price
<b>Smooth Top Plate</b>				
175686	4 ft × 4 ft × 4.625 in	5,000 lb (2,500 kg)	650 lb	Consult
175689	4 ft × 4 ft × 4.625 in	10,000 lb (5,000 kg)	650 lb	Consult
175694	5 ft × 5 ft × 4.625 in	5,000 lb (2,500 kg)	950 lb	Consult
175695	5 ft × 5 ft × 4.625 in	10,000 lb (5,000 kg)	950 lb	Consult
<b>Diamond Tread Top Plate</b>				
175688	4 ft × 4 ft × 4.625 in	5,000 lb (2,500 kg)	650 lb	Consult
175690	4 ft × 4 ft × 4.625 in	10,000 lb (5,000 kg)	650 lb	Consult
175696	5 ft × 5 ft × 4.625 in	5,000 lb (2,500 kg)	950 lb	Consult
175697	5 ft × 5 ft × 4.625 in	10,000 lb (5,000 kg)	950 lb	Consult

## Options/Accessories

Part #	Description	Price
28740	Floor stand for indicator, 36.3 in high, stainless steel	Consult
18778	Floor anchor plates, stainless steel (set of two)	Consult
<b>Pit Frames (L × W)</b>		
175691	4 × 4 ft	Consult
175698	5 × 5 ft	Consult
<b>Ramps (Diamond Treadplate Standard)</b>		
	<b>Ramp Angle of Incline</b>	
175692	4 ft × 3 ft × 4.625 in, fits hinge/handhole side	7.0°
175693	4 ft × 4 ft × 4.625 in, fits hinge/handhole side	5.2°
175699	5 ft × 3 ft × 4.625 in, fits hinge/handhole side	7.0°
175700	5 ft × 4 ft × 4.625 in, fits hinge/handhole side	5.2°
178840	4 ft × 3 ft × 4.625 in, fits side of scale	7.0°
178849	4 ft × 4 ft × 4.625 in, fits side of scale	5.2°
178850	5 ft × 3 ft × 4.625 in, fits side of scale	7.0°
178851	5 ft × 4 ft × 4.625 in, fits side of scale	5.2°

## Standard Features

- Rugged washdown design, rigid 304 stainless steel frame constructed with continuous welds
- Meets HACCP requirements
- Manual drop-in-place safety bars
- Four stainless steel, hermetically sealed, IP69K shear beam load cells with 30 ft cables
- 20 ft of SURVIVOR® EL147HE hostile environment cable for connecting junction box to indicator
- Remote junction box can be mounted up to 15 ft away
- 1/4 in top plate
- Four adjustable stainless steel SUREFOOT™ support feet
- Top plate opens 75 degrees
- Tool-less top plate lock downs
- Top plate available with a smooth deck or diamond treadplate
- Two 1/2-20 NF threaded eyebolt holes for lifting scale into pit frame

## Specifications

### End Load Capacity:

- 100% full scale at 5,000 lb
- 80% full scale at 10,000 lb

### Cable Length:

- 20 ft (6.1 m) for connecting junction box to indicator

### Scale Weldment:

- AISI304L, glass bead blasted for even appearance

### Junction Box:

- TuffSeal® JB4SS stainless steel, NEMA Type 4X junction box with signal trim card

### Welding:

- Continuous

### Threaded Eyebolt:

- Two 1/2-20 NF threaded eyebolt holes for lifting scale into pit frame

### Warranty (limited):

- Weldment: Five years
- Load cells: Two years
- All other components: One year


### Approvals:

- NSF
- cFMus

# RoughDeck® QC-X

Quick Clean Extreme Lift Floor Scale with Solid Plate Base


FLOOR SCALES

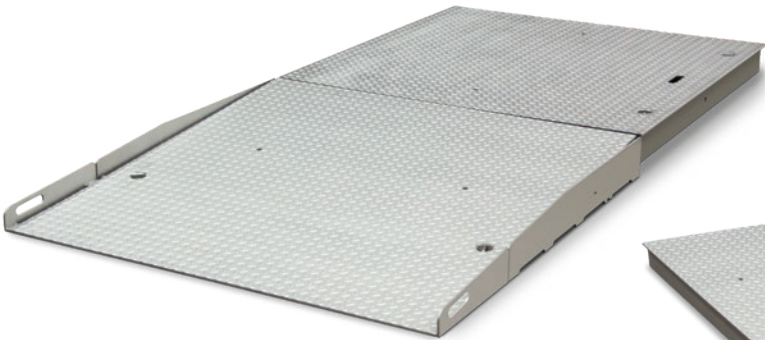


Ramp fits side of scale




Ramp fits hinge/handhole side

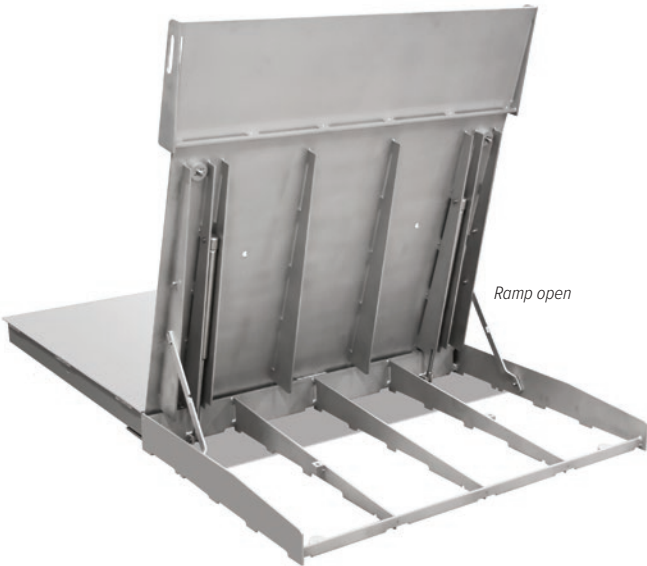

Ramp open

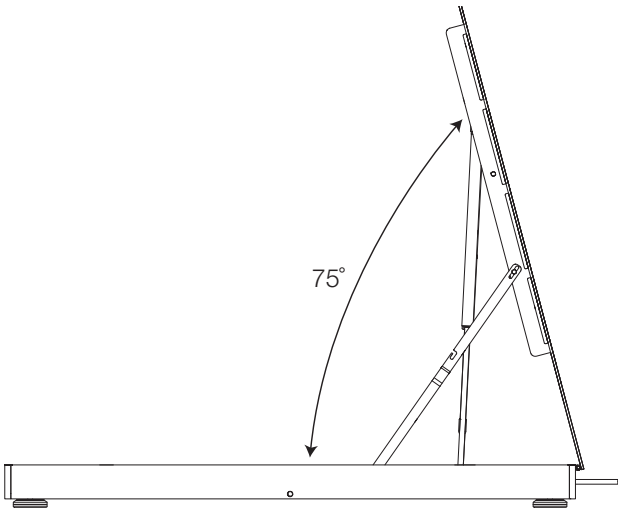

Upright position

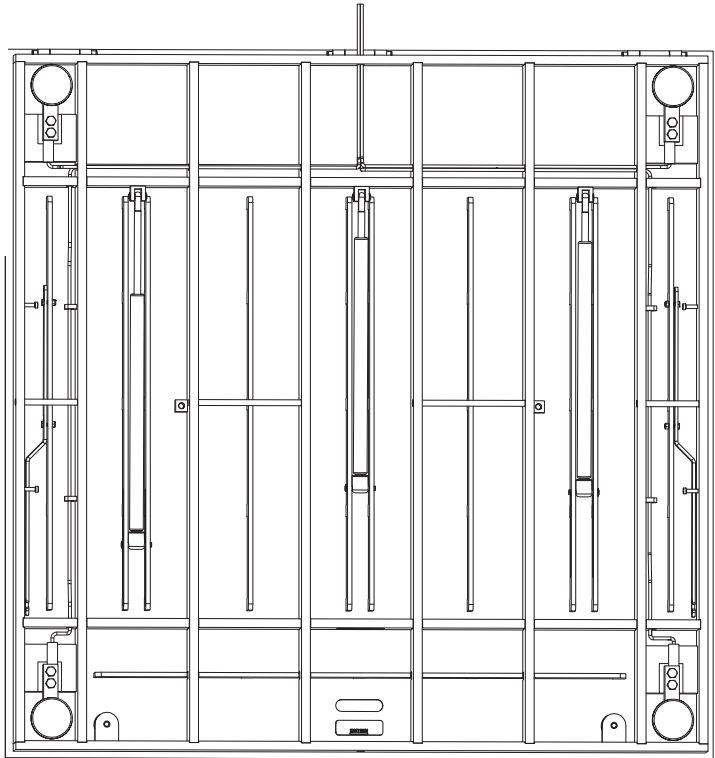

Underdeck View