

Discontinued
Limited Stock Available




Picture is a representation of actual product.

Dimensions

Rated Capacity	L	L1	L2	H	W	I	K	C
kN/in								
2.3	6.10	2.98	1.60	1.58	0.59	0.54	0.99	1.39

Order Information

Load Rating	Part #	Est. Weight	Price
2.3 kN	38215	4 lb	Consult
Options			
Conduit adapter, 1/2-14 NPT	17703	1 lb	Consult

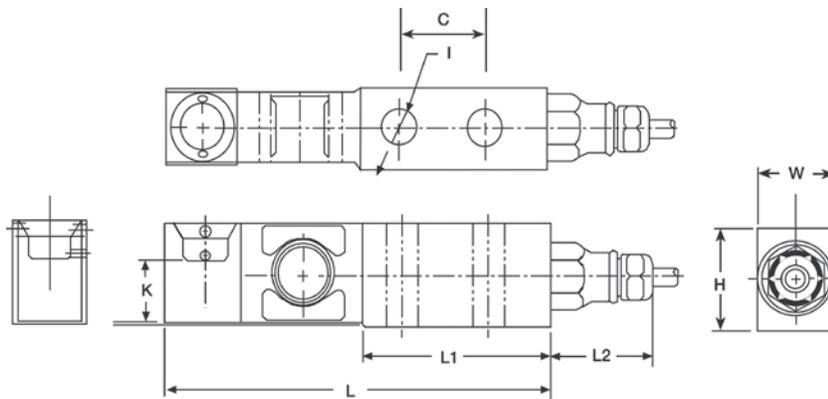

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

Paramounts® HE..... page 26

RICE LAKE WEIGHING SYSTEMS

Paramounts® HS..... page 39

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

1,000 (± 2) ohm

Input Resistance:

1,100 (± 50) ohm

Material/Finish:

Stainless steel

Temperature:

Operating range

0° F to 150° F (-18° C to 65° C)

Seal Type:

Hermetically sealed, IP69K

Safe Overload:

200% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5-10 VDC (15 V maximum)

Nonlinearity:

0 to -0.03% full scale

Hysteresis:

0 to +0.05% full scale

Insulation Resistance:

10,000 megohms

Deflection at Capacity:

0.008 in

Cable Length:

10 ft

Cable Diameter:

0.196 in polyurethane jacket

Cable Color Code:

Green +Excitation

Black -Excitation

White +Signal

Red -Signal

Yellow Shield

Warranty:

One-year limited warranty

Approvals:

OIML

