



Picture is a representation of actual product.

Approvals



Order Information


Load Rating	Part #	Est. Weight	Price
NTEP Certified/OIML			
5 kN	26662	4 lb	Consult
10 kN	26663	4 lb	Consult
23 kN	26664	4 lb	Consult
50 kN	26665	7 lb	Consult
Non-NTEP Certified/Non-OIML			
5 kN	17390	4 lb	Consult
10 kN	17391	4 lb	Consult
23 kN	17392	4 lb	Consult
50 kN	17393	7 lb	Consult
100 kN	17394	17 lb	Consult
Options			
Conduit adapter, 1/2-14 NPT	17703	1 lb	Consult

30 ft Cables

Load Rating	Part #	Est. Weight	Price
NTEP Certified/OIML			
5 kN	100164	4 lb	Consult
10 kN	100165	4 lb	Consult
23 kN	100166	4 lb	Consult
50 kN	100167	7 lb	Consult
Non-NTEP Certified/Non-OIML			
5 kN	100169	4 lb	Consult
10 kN	100170	4 lb	Consult
23 kN	100171	4 lb	Consult
50 kN	100173	7 lb	Consult
100 kN	100168	17 lb	Consult

Dimensions

Rated Capacity kN/in	C	C1	H	H1	H2	H3	H5	L	L1	L2	L3	L4	W
5 to 23	0.53	0.71	1.42	0.39	0.59	1.19	0.16	6.10	0.59	1.38	3.15	2.98	1.18
50	0.85	0.98	1.93	0.58	0.81	1.62	0.31	7.48	0.83	1.57	4.13	3.66	1.69
100	1.06	1.18	2.87	0.82	1.21	2.43	—	9.65	1.19	1.97	5.31	4.72	2.36

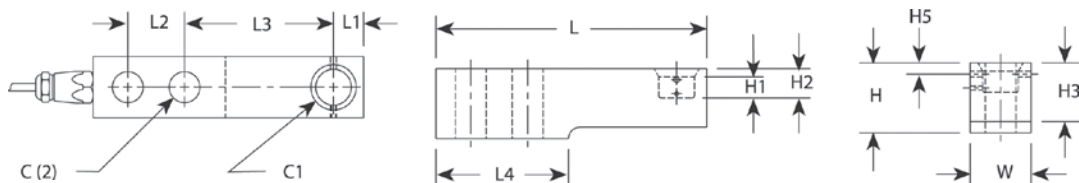

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS
Paramounts® HE..... page 36
 RICE LAKE WEIGHING SYSTEMS
Paramounts® HS..... page 51

Specifications

Full Scale Output:
 2.0 mV/V
 mV/V/ohm calibration

Output Resistance:
 1,000 (± 2) ohm

Input Resistance:
 1,100 (± 50) ohm

Material/Finish:
 Stainless steel

Temperature:
 Compensated range
 14 °F to 104 °F (-10 °C to 40 °C)
 Operating range
 0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:
 Hermetically sealed, IP69K

Safe Overload:
 200% full scale

Safe Sideload:
 100% full scale

Rated Excitation:
 5 to 10 VDC (15 V maximum)

Combined Error:
 ± 0.03% full scale

Insulation Resistance:
 10,000 megohm

Deflection at Capacity:
 10 kN: 0.012 in
 23 kN: 0.02 in
 50 kN: 0.012 in
 100 kN: 0.016 in

Cable Length:
 5 to 23 kN: 10 ft
 50 to 100 kN: 15 ft
 Also available in 30 ft.

Cable Diameter:
 0.196 in
 Polyurethane jacket

Cable Color Code:
 Green +Excitation
 Black -Excitation
 White +Signal
 Red -Signal
 Yellow Shield

Warranty:
 One-year limited

Approvals:
 FM
 NTEP
 OIML

FLINTEC