

Picture is a representation of actual product

#### Approvals




#### Order Information

Load Rating	Part #	Est. Weight	Price
15 kg	<b>17451</b>	3 lb	Consult
30 kg	<b>17452</b>	3 lb	Consult
75 kg	<b>17485</b>	3 lb	Consult
100 kg	<b>17453</b>	3 lb	Consult
150 kg	<b>36466</b>	3 lb	Consult

#### Dimensions

Rated Capacity	H	L	L1	L2	L3	T	T1	W	W1
kg/mm									
15 to 150	40.0	150.0	5.95	19.1	100.0	1/4-20	1/4-28	25.4	29.4

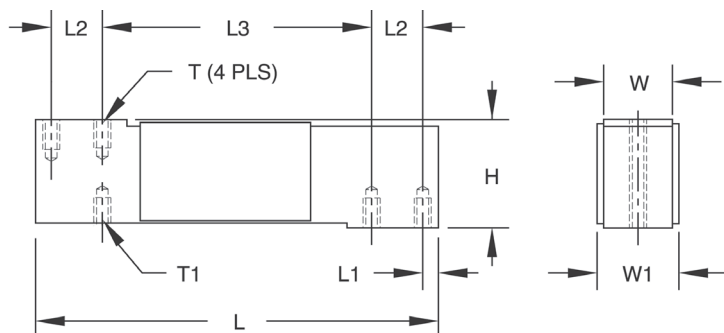

#### Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

**RL1140** ..... page 165

#### Specifications

##### Full Scale Output:

2.0 mV/V

##### Output Resistance:

350 (± 5) ohm

##### Input Resistance:

383 (± 15) ohm

##### Material/Finish:

Stainless steel

##### Temperature:

Compensated:

14 °F to 104 °F (-10 °C to 40 °C)

Operating:

0 °F to 150 °F (-18 °C to 65 °C)

##### Seal Type:

Environmentally sealed, IP65

##### Safe Overload:

150% at center loading point, full scale

##### Rated Excitation:

5 to 10 VDC (15 V maximum)

##### Combined Error:

0.02% full scale

##### Insulation Resistance:

2,000 megohm

##### Deflection at Capacity:

0.015 in

##### Cable Length:

10 ft

##### Cable Color Code:

Green +Excitation

Black -Excitation

Red +Signal

White -Signal

Blue +Sense

Brown -Sense

##### Max Platform Size:

15.75 × 15.75 in

##### Warranty:

One-year limited

##### Approvals:

cFMus