

Picture is a representation of actual product.

### Approvals




### Order Information

Load Rating	Part #	Est. Weight	Price
10 kN	17073	4 lb	Consult
20 kN	17074	4 lb	Consult
50 kN	17075	13 lb	Consult
Options			
Conduit adapter, 1/2-14 NPT	17703	1 lb	Consult

### Dimensions

Rated Capacity	A*	B	D	E
kN/in				
10 to 20	5/8-18 UNF	1.18	3.38	3.62
50	1-12 UNF	1.69	5.62	5.37

\*Also available with metric threads

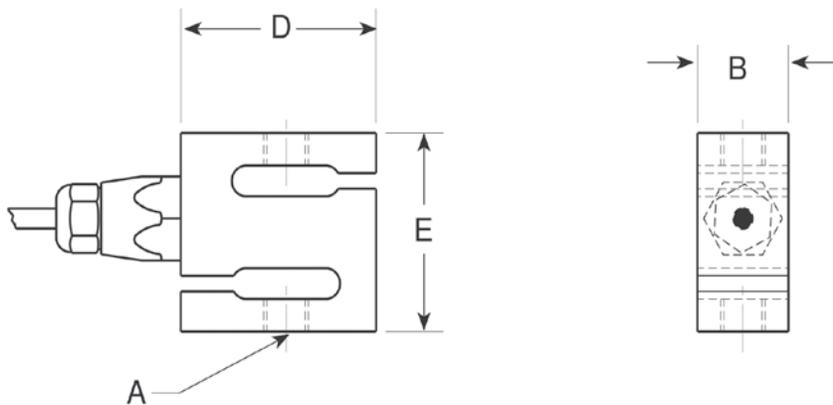

### Specifications

- Full Scale Output:**  
2.0 mV/V  
mV/V/ohm calibration
- Output Resistance:**  
1,000 (± 2) ohm
- Input Resistance:**  
1,100 (± 50) ohm
- Material/Finish:**  
Stainless steel
- Temperature:**  
Operating range  
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**  
Hermetically sealed, IP69K
- Safe Overload:**  
200% full scale
- Rated Excitation:**  
5 to 10 VDC (15 V maximum)
- Nonlinearity:**  
0 to -0.03% full scale
- Hysteresis:**  
0 to +0.05% full scale
- Combined Error:**  
± 0.03%
- Insulation Resistance:**  
10,000 megohm
- Cable Length:**  
20 ft
- Cable Diameter:**  
0.196 in  
Polyurethane jacket
- Cable Color Code:**  
Green +Excitation  
Black -Excitation  
White +Signal  
Red -Signal  
Yellow Shield
- Warranty:**  
One-year limited
- Approvals:**  
FM  
OIML