

2024

Healthweigh®

Patient Weighing Solutions



RICE LAKE[®]
WEIGHING SYSTEMS

800-472-6703

www.ricelake.com/health



CUSTOMER SERVICE

Rice Lake is relied upon throughout the world for delivering the highest standard of product along with the best service in the weighing industry. Knowledgeable customer service representatives are available by phone, email and live chat on www.ricelake.com, Monday through Friday from 6:30 a.m. to 6:30 p.m. Central Time. Emergency scale support is available 24/7/365.

CONTACT INFORMATION

Toll Free USA:
800-472-6703

Telephone:
715-234-9171

Toll Free Canada/Mexico:
800-321-6703

24-hour Fax:
715-234-6967

Email:
orderdesk@ricelake.com

Website:
www.ricelake.com

RICE LAKE WEIGHING SYSTEMS' HISTORY OF QUALITY AND SUPPORT

From accurate medical dosing, research and laboratory work to patient intake, home healthcare and fitness centers, Rice Lake provides health and fitness equipment to serve the industry's need for reliable and accurate measurement.

Since 1946, Rice Lake Weighing Systems has been manufacturing and distributing weight-related products and supplies. A global leader in measurement and weight-based solutions, Rice Lake's roots have been planted firmly in the principles of quality and customer service through three generations of family ownership.

CALIFORNIA PROPOSITION 65 RICE LAKE WEIGHING SYSTEMS STATEMENT

Proposition 65 requires businesses to inform Californians about exposures to chemicals that are known to cause cancer, birth defects or other reproductive harm. These chemicals may be in the products you purchase, or they may be exposed to you at home, at the workplace or within the environment. Proposition 65 enables Californians to make informed decisions about their exposures to these chemicals.

Rice Lake Weighing Systems wants to be proactive in regards to Proposition 65 and provide information about the products we produce, distribute and use to manufacture equipment we sell.

We are providing this warning based on the knowledge that one or more chemicals included in the California Proposition 65 list known to cause cancer, birth defects or other reproductive harm may be present in Rice Lake Weighing Systems products and workplaces.



WARNING: Chemicals listed in California Proposition 65 known to cause cancer, birth defects or other reproductive harm may be present only in trace amounts or contained within Rice Lake Weighing Systems products and proper encapsulation equipment. This warning is provided out of an abundance of caution to enable you to be an informed consumer.

More information about California Proposition 65 can be found at www.P65Warnings.ca.gov

TABLE OF CONTENTS

4	150-10-5 Digital Physician Scale
6	150-10-6 Digital Physician Scale
8	150-10-7 Digital Physician Scale
10	160-10-7N Digital Athletic Scale Low-Profile
12	RL-MPS Mechanical Physician Scale
14	RL-MPS-10 Mechanical Physician Scale
16	RL-MPS-20 Mechanical Physician Scale
18	RL-MPS-30 Mechanical Physician Scale
20	RL-MPS-40 Mechanical Physician Scale
22	RL-MPS-50 Mechanical Physician Scale
26	250-10-2 Bariatric Handrail Scale
28	250-10-4 Bariatric Handrail Scale
30	260-10-1 Bariatric Handrail Scale
34	350-10-3M Dual-ramp Wheelchair scale
36	350-10-2 Single-Ramp Wheelchair Scale
38	350-10-3 Dual-ramp Wheelchair Scale
40	350-10-4 Dual-ramp Wheelchair Scale with seat
42	350-10-7 Single-ramp Wheelchair Platform Scale
44	350-10-8 Dual-ramp Wheelchair Platform Scale
46	RL-350-5 Single-ramp Portable Bariatric Wheelchair Scale
48	RL-350-6 Dual-ramp Portable Bariatric Wheelchair Scale
50	SB-1150 Bariatric Wheelchair Scale
52	SD-1150-WP Dialysis Wheelchair Scale
56	350-10-8S Digital Stretcher Scale

60	550-10-1 Digital Chair Scale
62	560-10-1 Digital Chair Scale
64	RL-MCS Mechanical Chair scale
68	RL-DBS Digital Baby Scale
70	RL-DBS-2 Digital Baby Scale
72	650-10-1 Neonatal Scale
74	RL-MIS Mechanical Baby Scale
76	RL-MIS-20 Mechanical Baby Scale
78	DIGITAL BABY SCALE Suspended Infant Scale
80	RL-PCT-10 Pediatric Circumference Tape
81	RL-WMS-10 Wall Mount Stadiometer
84	RL-330HHD/RL-330HHL Dial Home Health Scale
86	DHH-10 Digital Home Health Scale
90	EQUIPOISE SERIES Toploader Balance
92	TS SERIES Toploader Washdown Balance
94	TE SERIES Tuning Fork Enhanced Balance
95	CALIBRATION WEIGHTS
96	ADDITIONAL RICE LAKE PRODUCTS FOR YOUR FACILITY

KEY



BLUETOOTH® BLE 4.0



ADAPTOR



BATTERY



UPS/FEDEX



LTL*



HEIGHT METER



1 YEAR WARRANTY



2 YEAR WARRANTY

To review our terms and conditions, please visit
www.ricelake.com

*Shipping weights and dimensions for products recommended to ship via LTL do not include pallet weight or pallet dimensions unless noted.

A standard LTL delivery is considered to be one that ships from either a company or partner dock to arrival at a standard commercial address with disposition of the goods at the rear of the truck to enable off loading by material handling equipment provided by the consignee at either ground level or via loading dock. Allied to this, the freight in question should be palletized and secured in a way to facilitate the safe handling of the freight with no one dimension over seven feet, six inches.

Any LTL delivery falling outside of this criteria may well accrue accessorial charges levied by the carrier in line with their tariff rules. It is recommended that any potential accessorial costs are discussed at the time of order placement so that these costs can be billed appropriately at the time of shipment. If this is not the case, Rice Lake Weighing Systems reserves the right to charge the customer retrospectively for any accessorial costs incurred during the delivery process.

TRADEMARKS

The following product names, logos, brands and other trademarks featured or referred to within this publication are the property of their respective trademark holders.

Bluetooth®

Healthweigh®

Motiontrap™

Summit™

Rice Lake Weighing Systems®



135.2 LB



On/Off



Print
LB/KG



Zero

Healthweigh®

RICE LAKE



Hold
Release



BMI



CLEAR



ENTER

PHYSICIAN SCALES
DIGITAL AND MECHANICAL



EYE-LEVEL

150-10-5

DIGITAL PHYSICIAN SCALE

The Rice Lake 150-10-5 digital physician scale has an eye-level digital display to provide a clear weight reading. With a height bar integrated into the scale column, healthcare professionals can quickly capture both height and weight information. Built-in wheels make the 150-10-5 easy to transport and the choice between using an AC adapter or batteries means this physician scale can be used nearly anywhere in a healthcare facility.

FEATURES

- Large, stable scale base
- Integrated height rod
- Non-slip rubber mat, removable for cleaning
- Rubber wheels for easy transport
- Push-button LCD display
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Hold function
- Zero function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:

550 × 0.2 lb (250 × 0.1 kg)

Platform Dimensions:

(L × W × H)
14.5 × 14.5 × 3 in

Height Rod:

Measures from 27.50 to 82.00 in
(70 to 208 cm)

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50 °F to 104 °F (10 °C to 40 °C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited





DIGITAL PHYSICIAN SCALE - EYE-LEVEL

MODEL	CAPACITY	COMMUNICATION	PART #
150-10-5	550 × 0.2 lb (250 × 0.1 kg)	USB	119113
150-10-5BLE	550 × 0.2 lb (250 × 0.1 kg)	Bluetooth® BLE 4.0	194726

OPTIONS

DESCRIPTION	PART #
9 VDC adaptor, 120 V/230 V auto switching c-MET* <i>Medical grade power supply</i>	115655
9 VDC adaptor, 120 V/230 V auto switching*	133077
9 VDC adaptor, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
150-10-5	119113	30	18	9	26	35	35
150-10-5BLE	194726	30	18	9	26	35	35

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	54.0	137.2	C	14.7	37.5
B	22.4	57.0	D	3.0	7.6

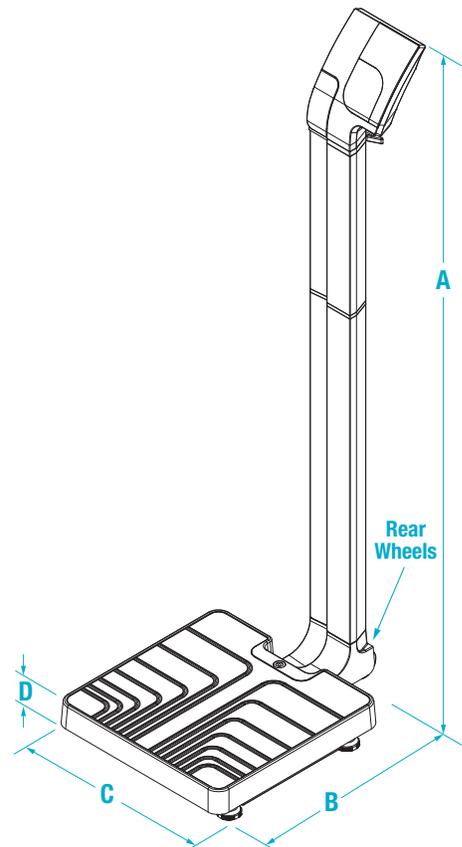



WAIST-LEVEL

150-10-6

DIGITAL PHYSICIAN SCALE

The Rice Lake 150-10-6 digital physician scale is designed with a modern appearance and features a waist-level digital display at just over four feet for ease of use. The large, stable scale base is both comfortable and easily transported with two built-in rubber wheels. The 150-10-6 can be powered from an optional AC adapter or standard alkaline batteries. Its large push-button display lights up for simple viewing and an audible beep sounds at the end of each weigh cycle.

PG
6

FEATURES

- Large, stable scale base
- Rubber wheels for easy transport
- Non-slip rubber mat, removable for cleaning
- Push-button LCD display
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Hold function
- Zero function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:

550 × 0.2 lb (250 × 0.1 kg)

Platform Dimensions:

(L × W × H)

14.5 × 14.5 × 3 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50 °F to 104 °F (10 °C to 40 °C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited



DIGITAL PHYSICIAN SCALE - WAIST-LEVEL

MODEL	CAPACITY	COMMUNICATION	PART #
150-10-6	550 × 0.2lb (250 × 0.1 kg)	USB	161786
150-10-6BLE	550 × 0.2lb (250 × 0.1 kg)	Bluetooth® BLE 4.0	194732

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching c-MET* <i>Medical grade power supply</i>	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
150-10-6	161786	30	19	9	25	37	37
150-10-6BLE	194732	30	19	9	25	37	37

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	48.4	123.0	C	14.7	37.5
B	22.4	57.0	D	3.0	7.6

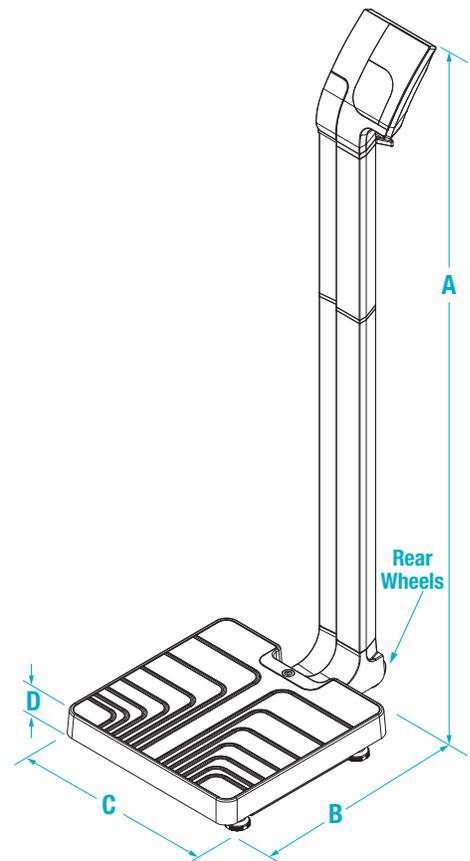

FLOOR-LEVEL

150-10-7

DIGITAL PHYSICIAN SCALE

The Rice Lake 150-10-7 digital physician scale provides precision weight measurements up to 550 pounds. The large, stable scale base is both comfortable and easily transported with an optional carrying case. Whether powered from an optional AC adapter or standard alkaline batteries, the 150-10-7 is easy to use. Its large push-button display lights up for easy viewing and an audible beep sounds at the end of each weigh cycle.

FEATURES

- Large, stable scale base
- Push-button LCD display
- Non-slip rubber mat, removable for cleaning
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Hold function
- Zero function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:
550 × 0.2 lb (250 × 0.1 kg)

Platform Dimensions:
(L × W × H)
14.5 × 14.5 × 3 in

Power:
9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Operating Temperature:
50 °F to 104 °F (10 °C to 40 °C)

Battery Type:
Six AA alkaline (included)

Battery Use:
25 hours continuous use with batteries
Automatic power-off can be configured

Cable Length:
6 ft (1.8 m) cable between scale base and indicator

Display:
5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:
c-Met, E113986

Warranty:
Two-year limited





DIGITAL PHYSICIAN SCALE - FLOOR-LEVEL

MODEL	CAPACITY	COMMUNICATION	PART #
150-10-7	550 × 0.2lb (250 × 0.1 kg)	USB	121304
150-10-7BLE	550 × 0.2lb (250 × 0.1 kg)	Bluetooth® BLE 4.0	194728

OPTIONS

DESCRIPTION	PART #
Carrying case	107445
9 VDC adapter, 120 V/230 V auto switching c-MET* <i>Medical grade power supply</i>	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091

*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT


MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
150-10-7	121304	25	18	6	17	20	20
150-10-7BLE	194728	25	18	6	17	20	20

DIMENSIONS

	INCHES	CENTIMETERS	INCHES	CENTIMETERS
A	14.7	37.5	D	7.8
B	14.7	37.5	E	6.7
C	3.0	7.6		



Carrying case

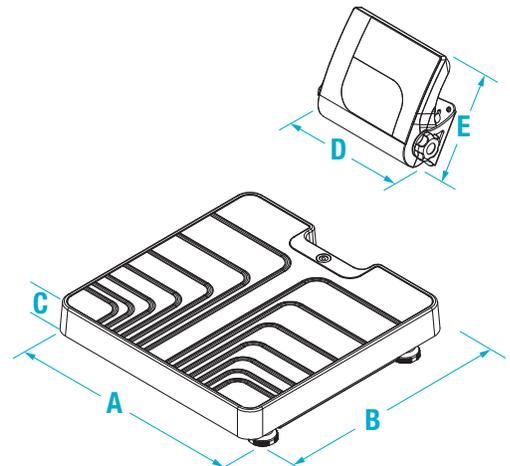

160-10-7N

DIGITAL ATHLETIC SCALE LOW-PROFILE

Rice Lake's 160-10-7N low-profile digital athletic scale offers superior accuracy and built-in durability for repetitive use in settings where a Legal for Trade scale is needed. It is slip-resistant, demands little space and is exceptionally portable. The 160-10-7N low-profile scale features a very low, 1.65-inch rise.



Actual height of low profile (1.65 inches)

FEATURES

- Large, stable scale base
- Push-button LCD display
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Zero function
- Factory calibrated

SPECIFICATIONS



Capacity:
550 × 0.2 lb (250 × 0.1 kg)

Platform Dimensions:
(L × W × H)
14.40 × 14.40 × 1.65 in

Power:
9 VDC, provided by six AA alkaline batteries (included) or 120V/230V AC adapter, NEMA 1-15 plug (included)

Battery Type:
Six AA alkaline (included)

Battery Use:
25 hours continuous use with batteries
Automatic power-off can be configured


Operating Temperature:
50 °F to 104 °F (10 °C to 40 °C)

Cable Length:
6 ft (1.8 m) cable between scale base and indicator

Display:
5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:
NTEP CC 18-011
Measurement Canada AM-6097
c-Met, E113986

Warranty:
Two-year limited

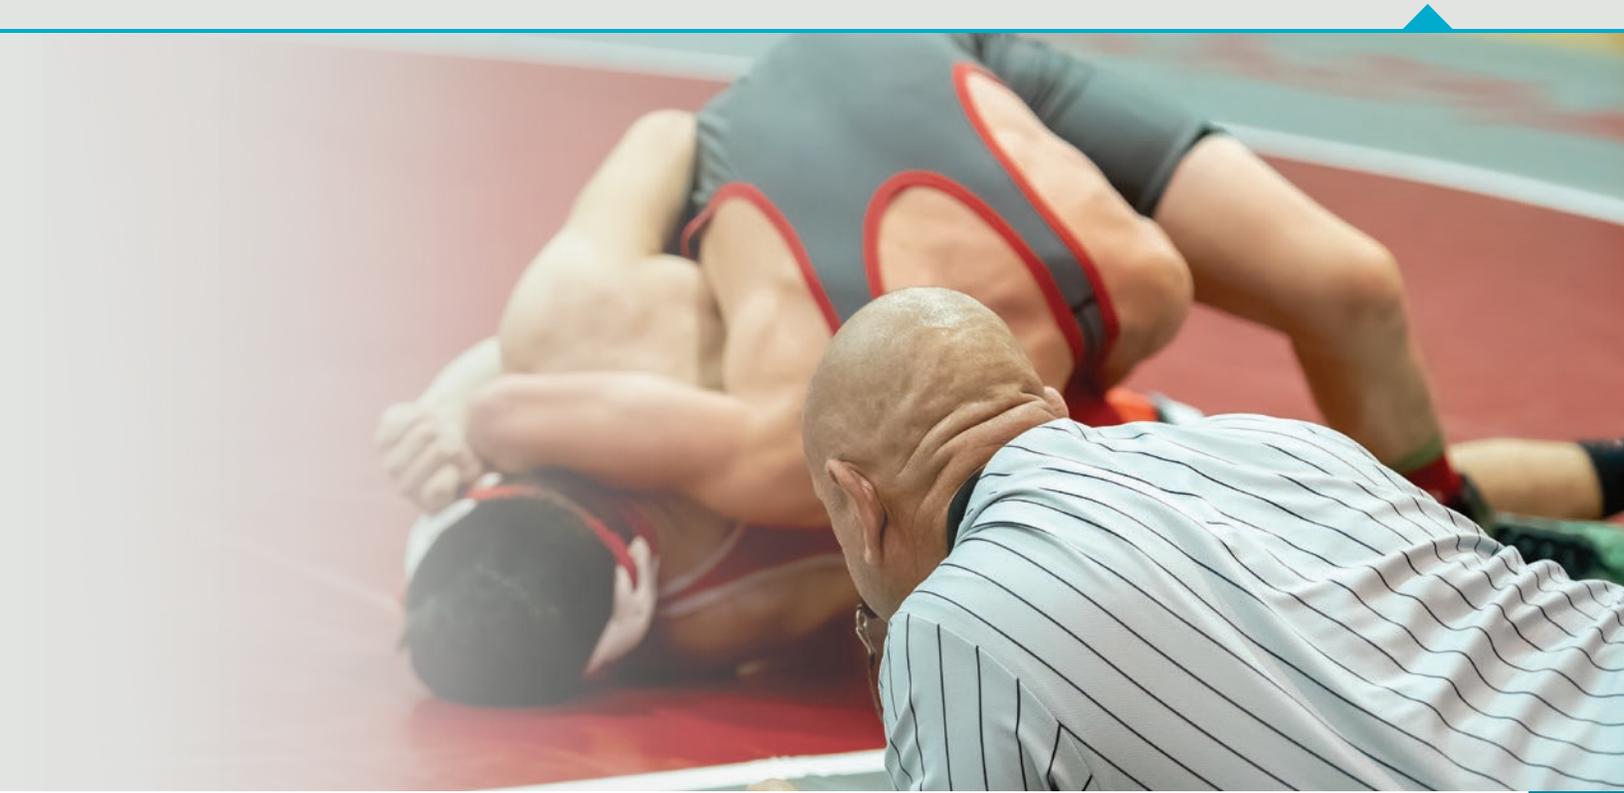

DIGITAL PHYSICIAN SCALE - LOW-PROFILE

MODEL	CAPACITY	COMMUNICATION	PART #
160-10-7N	550 x 0.2lb (250 x 0.1 kg)	USB	193355

OPTIONS


DESCRIPTION	PART #
Carrying case	107445
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
160-10-7N	193355	20	18	6	18	16	18

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	1.7	4.3	D	7.8	20.0
B	14.4	36.6	E	6.7	17.0
C	14.4	36.6			

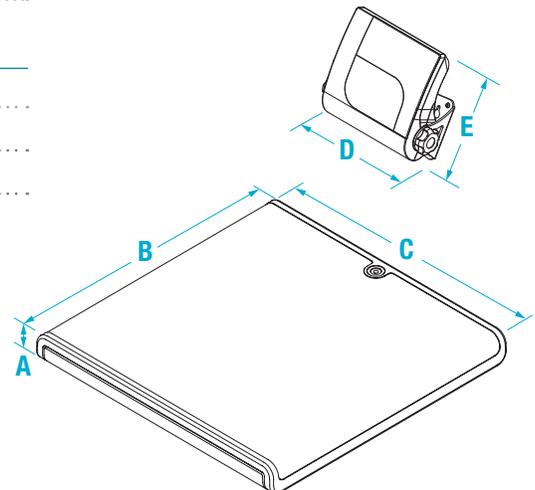

LB & KG

RL-MPS

MECHANICAL PHYSICIAN SCALE

The RL-MPS mechanical physician scale features a painted beam for weighing up to 440 pounds (200 kilograms). For added convenience, weight readings can be taken from either the front or back of the scale. Its base is designed with a removable, slip-resistant base cover for easy cleaning, and can be easily transported with two built-in durable wheels.



FEATURES

- Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Durable wheels for easy transport
- Easy operation with two sliding weights
- Removable slip-resistant scale base cover
- Aluminum height rod

SPECIFICATIONS

Capacity:
440 lb × 4 oz (200 kg × 100 g)

Platform Dimensions:
(L × W × H)
14.75 × 10.75 × 4.13 in

Height Rod:
Measures 24 to 84 in
(60 to 212 cm)

Height Division:
0.125 in (0.1 cm)

Warranty:
Two-year limited





MECHANICAL PHYSICIAN SCALE - LB AND KG


MODEL	CAPACITY	PART #
RL-MPS	440lb x 4 oz (200kg x 100g)	102613

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-MPS	102613	60	21	7	42	64	64

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	10.8	27.4	D	22.3	56.6
B	14.8	37.6	E	58.5	148.6
C	4.1	10.4			

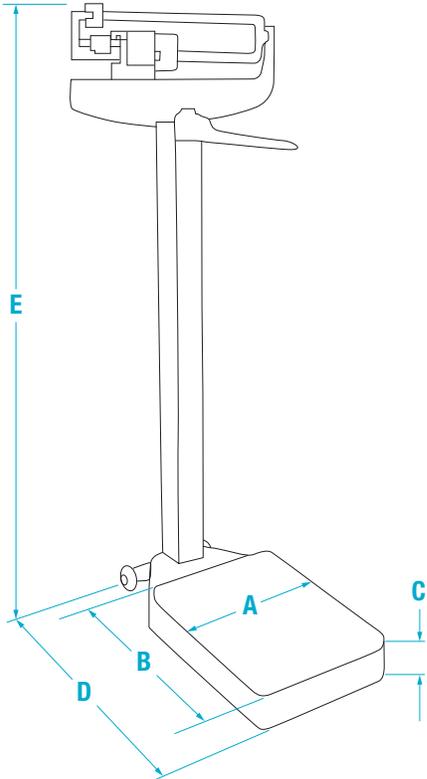

LB Only

RL-MPS-10

MECHANICAL PHYSICIAN SCALE

The RL-MPS-10 mechanical physician scale features a painted beam for weighing up to 450 pounds. For added convenience, weight readings can be taken from either the front or back of the scale. Its base is designed with a removable, slip-resistant base cover for easy cleaning, and can be easily transported with two durable built-in wheels.



FEATURES

- Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Durable wheels for easy transport
- Easy operation with two sliding weights
- Removable slip-resistant scale base cover
- Aluminum height rod

SPECIFICATIONS

Capacity:

450 lb × 4 oz

Platform Dimensions:

(L × W × H)

14.75 × 10.75 × 4.13 in

Height Rod:

Measures 24 to 84 in
(60 to 212 cm)

Height Division:

0.125 in

Warranty:

Two-year limited





MECHANICAL PHYSICIAN SCALE - LB ONLY


MODEL	CAPACITY	PART #
RL-MPS-10	450lb x 4oz	124223

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-MPS-10	124223	60	21	7	42	64	64

DIMENSIONS


	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	10.8	27.4	D	22.3	56.6
B	14.8	37.6	E	58.5	148.6
C	4.1	10.4			

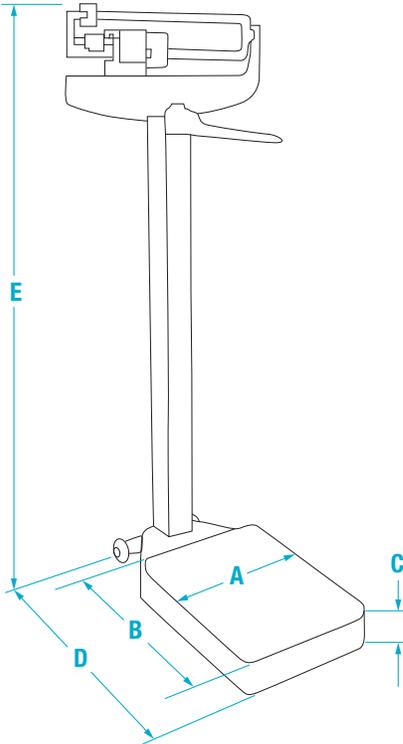



RL-MPS-20 MECHANICAL PHYSICIAN SCALE

The RL-MPS-20 mechanical physician scale features a painted beam for weighing up to 440 pounds (200 kilograms). For added convenience, weight readings can be taken from either the front or back of the scale. Its base is designed with a removable, slip-resistant base cover for easy cleaning.



FEATURES

- Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Easy operation with two sliding weights
- Removable slip-resistant scale base cover

SPECIFICATIONS

Capacity:
440 lb × 4 oz (200 kg × 100 g)

Platform Dimensions:
(L × W × H)
14.75 × 10.75 × 4.13 in

Warranty:
Two-year limited



MECHANICAL PHYSICIAN SCALE - LB AND KG


MODEL	CAPACITY	PART #
RL-MPS-20	440lb x 4oz (200kg x 100g)	124222

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-MPS-20	124222	60	21	7	36	64	64

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	10.8	27.4	D	22.3	56.6
B	14.8	37.6	E	58.5	148.6
C	4.1	10.4			

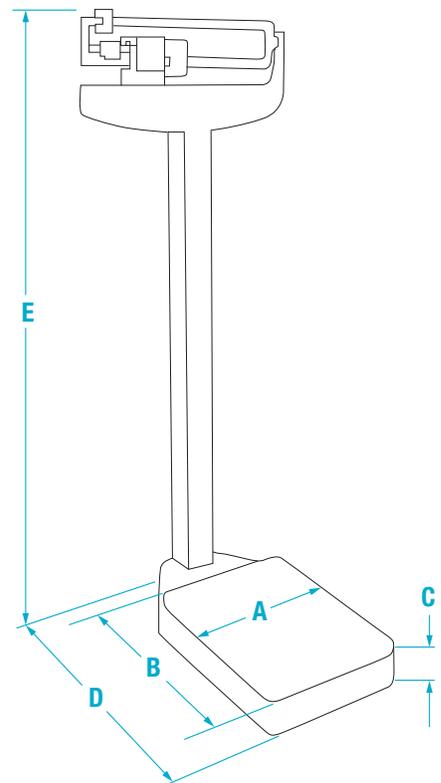

KG Only
with handpost

RL-MPS-30

MECHANICAL PHYSICIAN SCALE

The RL-MPS-30 mechanical physician scale with handpost features a painted beam for weighing up to 180 kilograms. A handpost installed at a strategic height provides enhanced support for all patients. For added convenience, weight readings can be taken from either the front or back of the scale. The RL-MPS-30 can be easily transported with two built-in wheels and its base is designed with a removable, slip-resistant base cover for easy cleaning.



FEATURES

- Sturdy, enameled steel body
- Painted beam
- Rugged scale understructure
- Handpost
- Durable wheels for easy transport
- Easy operation with two sliding weights
- Removable slip-resistant scale base cover
- Aluminum height rod

SPECIFICATIONS

Capacity:

180 kg x 100 g

Platform Dimensions:

(L x W x H)
37.5 x 27.5 x 10.5 cm

Height Rod:

Measures 60 to 212 cm

Height Division:

0.1 cm

Warranty:

Two-year limited





MECHANICAL PHYSICIAN SCALE - KG ONLY


MODEL	CAPACITY	PART #
RL-MPS-30	180kg x 100g	132703

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-MPS-30	132703	60	21	7	40	64	64

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	10.8	27.4	D	22.3	56.6
B	14.8	37.6	E	58.5	148.6
C	4.1	10.4	F	31.5	80.0

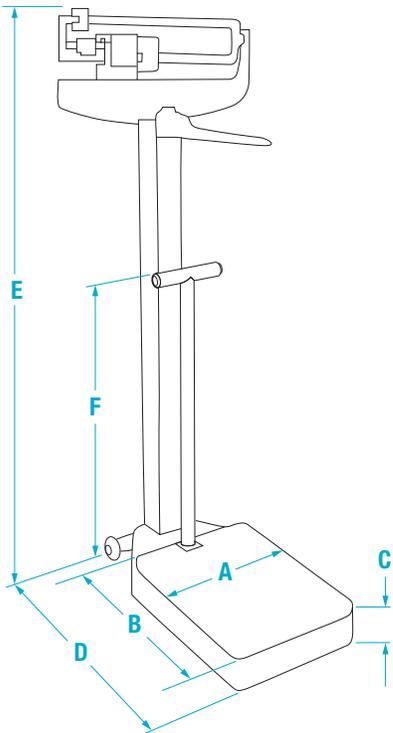

LB & KG

RL-MPS-40

MECHANICAL PHYSICIAN SCALE

The RL-MPS-40 mechanical physician scale features a painted beam for weighing up to 440 pounds (200 kilograms) and 490 pounds (220 kilograms) with the counterpoise weights. Weight and height can be easily read from either the front or back. The RL-MPS-40 can be easily transported with two built-in wheels and its base is designed with a removable, slip-resistant base cover for easy cleaning.



FEATURES

- Dual-read capacity and height rod
- Sturdy enameled steel body
- Painted beam designed to hold counterpoise weights
- Rugged scale understructure
- Removable slip-resistant plastic scale base cover
- Retractable aluminum height rod
- Easy operation with two sliding weights and two counterpoise weights (included)
- Rear wheels for portability ease
- Aluminum height rod

SPECIFICATIONS

Capacity with Counterpoise Weights:

490 lb × 4 oz (220 kg × 100 g)

Platform Dimensions:

(L × W × H)
14.75 × 10.75 × 4.13 in

Height Rod:

Measures 24 to 84 in
(60 to 212 cm)

Height Division:

0.125 in (0.1 cm)

Warranty:

Two-year limited





MECHANICAL PHYSICIAN SCALE - LB AND KG


MODEL	CAPACITY	PART #
RL-MPS-40	490lb x 4oz (220kg x 100g)	185289

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-MPS-40	185289	60	21	7	44	64	64

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	10.8	27.4	D	22.3	56.6
B	14.8	37.6	E	58.5	148.6
C	4.1	10.4			

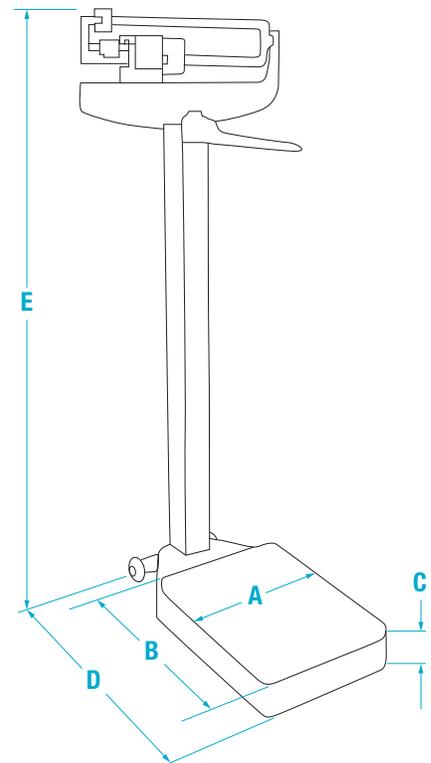

LB & KG

RL-MPS-50 MECHANICAL PHYSICIAN SCALE

Rice Lake's RL-MPS-50 mechanical physician scale is built to weigh patients up to 450 pounds (200 kilograms). The RL-MPS-50 features a height rod for monitoring growth and is designed with rear wheels for ease of transport. The poise travels freely along the weigh beam with just a tap of the finger. A distinctive, color-coded weigh beam is easy to read, with a kilogram weighing option available by flipping the beam.



PG
22

FEATURES

- Ease of transport with rear wheels
- Aluminum height rod included
- Poise travels free on weigh beam with simple finger tap
- Easy-to-read weigh beam's color-coded black inset shows LB markings, white inset shows KG markings. The beam can be rotated to the desired unit of measure.
- Aluminum height rod

SPECIFICATIONS

Capacity:
450 lb × 4 oz (200 kg × 100 g)

Platform Dimensions:
(L × W × H)
14.96 × 11.02 × 4.21 in

Height Rod:
Measures 29.50 to 78.75 in
(75 to 200 cm)

Height Division:
0.25 in (5 mm)

Warranty:
Two-year limited



Weigh beam with lb markings



Weigh beam with kg markings



MECHANICAL PHYSICIAN SCALE - LB AND KG


MODEL	CAPACITY	PART #
RL-MPS-50	450lb x 4oz (200kg x 100g)	195264

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-MPS-50	195264	60	21	5	39	46	46

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	11.0	28.9	D	22.2	56.4
B	15.0	38.1	E	58.9	149.6
C	4.2	10.7			

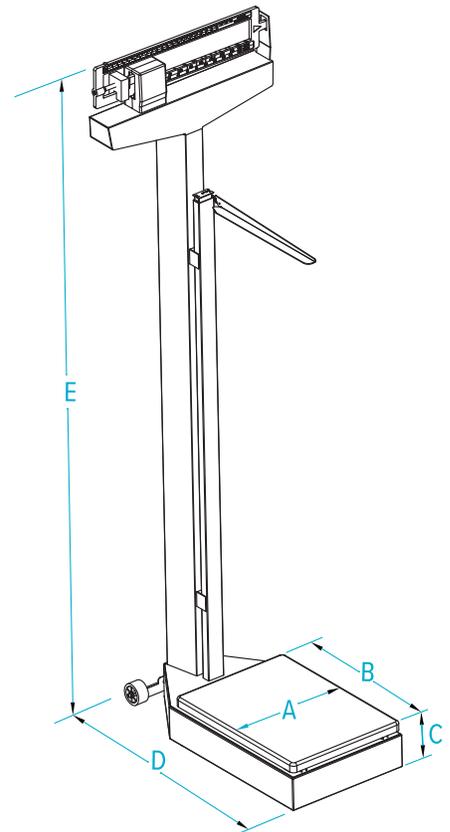



BARIATRIC HANDRAIL SCALES

250-10-2

BARIATRIC HANDRAIL SCALE

Rice Lake's 250-10-2 bariatric scale with handrail is designed for weighing patients who need extra support and safety. Advanced movement compensation technology eliminates errors caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.

FEATURES

- Handrail for support and safety
- Two wheels for ease of portability
- Large 1-inch LCD display
- Nonslip platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:
1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions:
(L × W × H)
25 × 20 × 3 in

Power:
9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:
Six AA alkaline (included)

Battery Use:
25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:
50 °F to 104 °F (10 °C to 40 °C)

Display:
5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:
c-Met, E113986

Warranty:
Two-year limited





BARIATRIC HANDRAIL SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
250-10-2	1,000 × 0.2lb (450 × 0.1kg)	USB	133119
250-10-2BLE	1,000 × 0.2lb (450 × 0.1kg)	Bluetooth® BLE 4.0	194733

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching c-MET* <i>Medical grade power supply</i>	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
250-10-2	133119	45	29	9	66	85	85
250-10-2BLE	194733	45	29	9	66	85	85

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	20.0	50.8	E	34.0	86.4
B	25.0	63.5	F	44.5	113.0
C	3.0	7.6	G	21.0	53.3
D	25.0	63.5			

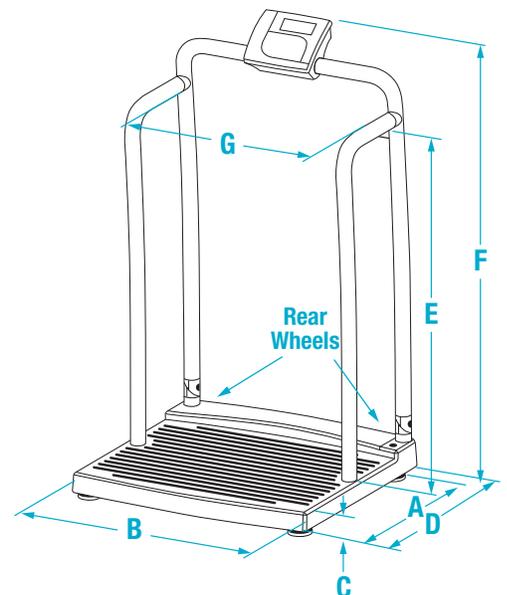

WITH SEAT

250-10-4

BARIATRIC HANDRAIL SCALE

Rice Lake's 250-10-4 bariatric scale with handrail and chair seat is designed for weighing patients who need extra support and safety during weighments. Patients can be weighed comfortably and safely while seated with the large, stable folding seat. Advanced movement compensation technology eliminates errors caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.

FEATURES

- Handrail for support and safety
- Padded seat with backrest
- Two wheels for ease of portability
- Large 1-inch LCD display
- Nonslip platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions:

(L × W × H)
25 × 20 × 3 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50 °F to 104 °F (10 °C to 40 °C)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited





BARIATRIC HANDRAIL SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
250-10-4	1,000 × 0.2lb (450 × 0.1kg)	USB	133120
250-10-4BLE	1,000 × 0.2lb (450 × 0.1kg)	Bluetooth® BLE 4.0	194734

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching c-MET* <i>Medical grade power supply</i>	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
250-10-4	133120	32	27	46	70	286	286
250-10-4BLE	194734	32	27	46	70	286	286

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	2.8	7.0	E	32.0	81.1
B	25.7	65.3	F	47.5	120.7
C	25.2	64.0	G	20.0	50.8
D	21.6	54.9	H	12.0	30.5

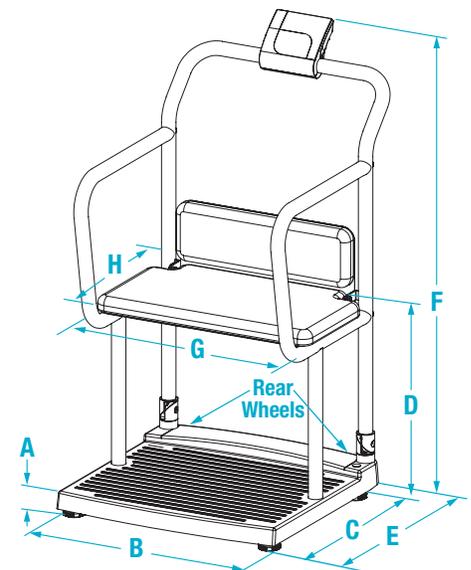

An ISO 9001 Registered Company ©2024 Rice Lake Weighing Systems 03/24
Specifications subject to change without notice. Visit ricelake.com



260-10-1

BARIATRIC HANDRAIL SCALE

Rice Lake's 260-10-1 bariatric scale with handrail is designed for weighing patients who need extra support and safety. Height and weight can be seamlessly captured with the optional integrated height rod. Advanced movement compensation technology eliminates errors caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.

FEATURES

- Handrail for support and safety
- Two wheels for ease of portability
- Large 1-inch LCD display
- Nonskid platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- Optional height rod can be installed on-site

SPECIFICATIONS

Capacity:
800 × 0.2 lb (360 × 0.1 kg)

Platform Dimensions:
(L × W × H)
24 x 24 x 2.75 in

Height Rod Dimensions:
30 to 83.125 in (77 to 211 cm)

Power:
9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:
Six AA alkaline (included)

Battery Use:
25 hours continuous use with batteries
Automatic power-off can be configured

Display:
5-digit LCD display, 0.75 in (1.9 cm) digit height

Operating Temperature:
50 °F to 104 °F (10 °C to 40 °C)

Warranty:
Two-year limited





BARIATRIC HANDRAIL SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
260-10-1	800 x 0.2lb (360 x 0.1 kg)	USB	170139

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Height rod 25.5-83 in (65-211 cm)	172958
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
260-10-1	170139	40	40	10	58	116	116
Height Rod	172958	33	9	3	3	7	7

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	24.0	61.0	D	25.5	65.0
B	24.0	61.0	E	33.5	85.0
C	2.75	7.0	F	43.0	109.0

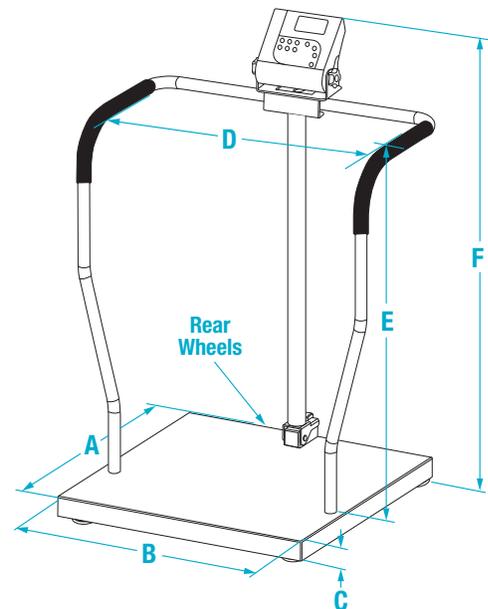



WHEELCHAIR SCALES

METAL PLATFORM

350-10-3M

DUAL-RAMP WHEELCHAIR SCALE

Rice Lake's 350-10-3M is a dual ramp, metal wheelchair scale joining the 350-10 Series family. This durable scale offers accurate, high-capacity weighing for a wide range of patients. The 350-10-3M has a large, stable scale base with a nonslip surface to ensure safety during patient weighing. Easy to set up, this foldable scale can be quickly moved on two heavy-duty rear wheels for efficient patient weighing in different locations.

FEATURES

- Two wheels for portability
- Dual ramp
- Nonslip platform
- Large 1-inch LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- Easy to store, folded depth is 11.75 in

SPECIFICATIONS

Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions:

(L × W × H)

29.5 × 31.5 × 3.2 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours of continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50 °F to 104 °F (10 °C to 40 °C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited





WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
350-10-3M	1,000 × 0.2lb (450 × 0.1 kg)	USB	193956
350-10-3MBLE	1,000 × 0.2lb (450 × 0.1 kg)	Bluetooth® BLE 4.0	203910

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching c-MET* <i>Medical grade power supply</i>	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
350-10-3M	193956	51	42	14	102	216	216
350-10-3MBLE	203910	51	42	14	102	216	216

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	3.15	8.0	E	31.5	80.0
B	47.7	121.2	F	29.5	74.9
C	37.8	96.0	G	2.4	6.1
D	45.3	115.1	H	27.2	69.1

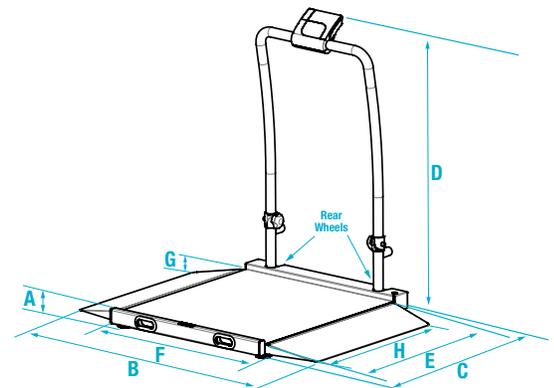

An ISO 9001 Registered Company ©2024 Rice Lake Weighing Systems 03/24
Specifications subject to change without notice. Visit ricelake.com



WITH HANDRAIL

350-10-2 SINGLE-RAMP WHEELCHAIR SCALE

Rice Lake's 350-10-2 single-ramp wheelchair scale with handrail allows high capacity, accurate weighing for a wide range of patients. Convenient keypad tare reduces errors and increases efficiency. Foldable and lightweight, this sturdy scale is easily transported on two heavy-duty rear wheels to any location.

FEATURES

- Two wheels for portability
- Single ramp
- Nonslip platform
- Large 1-inch LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- Easy to store, folded depth is 11.75 in

SPECIFICATIONS

Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions Without Ramp:

(L × W × H)

29.5 × 32.0 × 2.4 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours of continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50 °F to 104 °F (10 °C to 40 °C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited





WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
350-10-2	1,000 × 0.2lb (450 × 0.1 kg)	USB	141445
350-10-2BLE	1,000 × 0.2lb (450 × 0.1 kg)	Bluetooth® BLE 4.0	194739

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091

*NEMA 1-15 Plug  **CEE 7/16 Plug 


SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
350-10-2	141445	42	41	14	90	174	174
350-10-2BLE	194739	42	41	14	90	174	174

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	29.5	74.9	D	9.3	23.5
B	32.0	81.3	E	37.5	95.3
C	2.4	6.1	F	45.0	114.3

PG 37

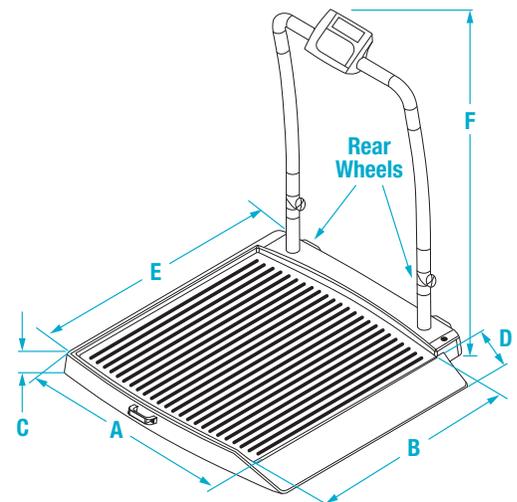

350-10-3

DUAL-RAMP WHEELCHAIR SCALE

Rice Lake's 350-10-3 dual-ramp wheelchair scale with handrail allows high-capacity, accurate weighing for a wide range of patients. Convenient keypad tare reduces errors and increases efficiency. Foldable and lightweight, this sturdy scale is easily transported on two heavy-duty rear wheels to any location.

FEATURES

- Two wheels for portability
- Dual ramp
- Nonslip platform
- Large 1-inch LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- Easy to store, folded depth is 11.75 in

SPECIFICATIONS

Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions Without Ramps:

(L × W × H)

29.5 × 32.0 × 2.4 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours of continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50 °F to 104 °F (10 °C to 40 °C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited





WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
350-10-3	1,000 × 0.2lb (450 × 0.1 kg)	USB	141447
350-10-3BLE	1,000 × 0.2lb (450 × 0.1 kg)	Bluetooth® BLE 4.0	194736

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching c-MET* <i>Medical grade power supply</i>	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
350-10-3	141447	51	42	14	102	216	216
350-10-3BLE	194736	51	42	14	102	216	216

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	48.5	123.2	D	9.3	23.6
B	32.0	81.3	E	38.0	96.5
C	2.4	6.1	F	45.0	114.3

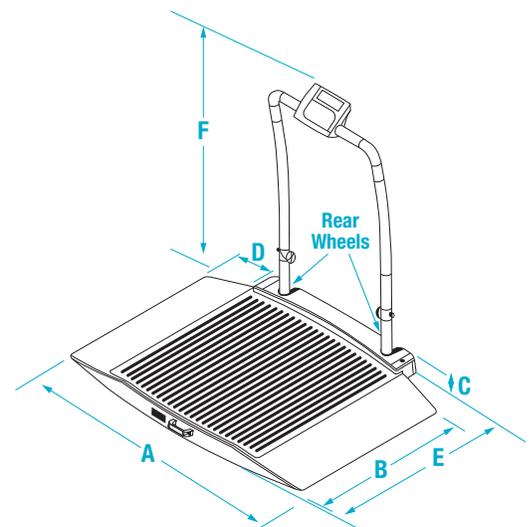

WITH SEAT AND
HANDRAIL

350-10-4

DUAL-RAMP WHEELCHAIR SCALE WITH SEAT

Rice Lake's 350-10-4 dual-ramp wheelchair scale with seat and handrail allows high capacity, accurate weighing for patients requiring a seat. The padded seat easily tucks away, allowing this model to function as either a wheelchair or chair scale. Convenient keypad tare reduces errors and increases efficiency. Foldable and lightweight, this sturdy scale is easily transported on two heavy-duty rear wheels to any location.

FEATURES

- Two wheels for portability
- Dual ramp
- Nonslip platform
- Fold-away padded seat with backrest
- Large 1-inch LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- Easy to store, folded depth is 11.75 in

SPECIFICATIONS

Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions Without Ramps:

(L × W × H)
29.5 × 32.0 × 2.4 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours of continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50 °F to 104 °F (14 °C to 40 °C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height


Approvals:

c-Met, E113986

Warranty:

Two-year limited



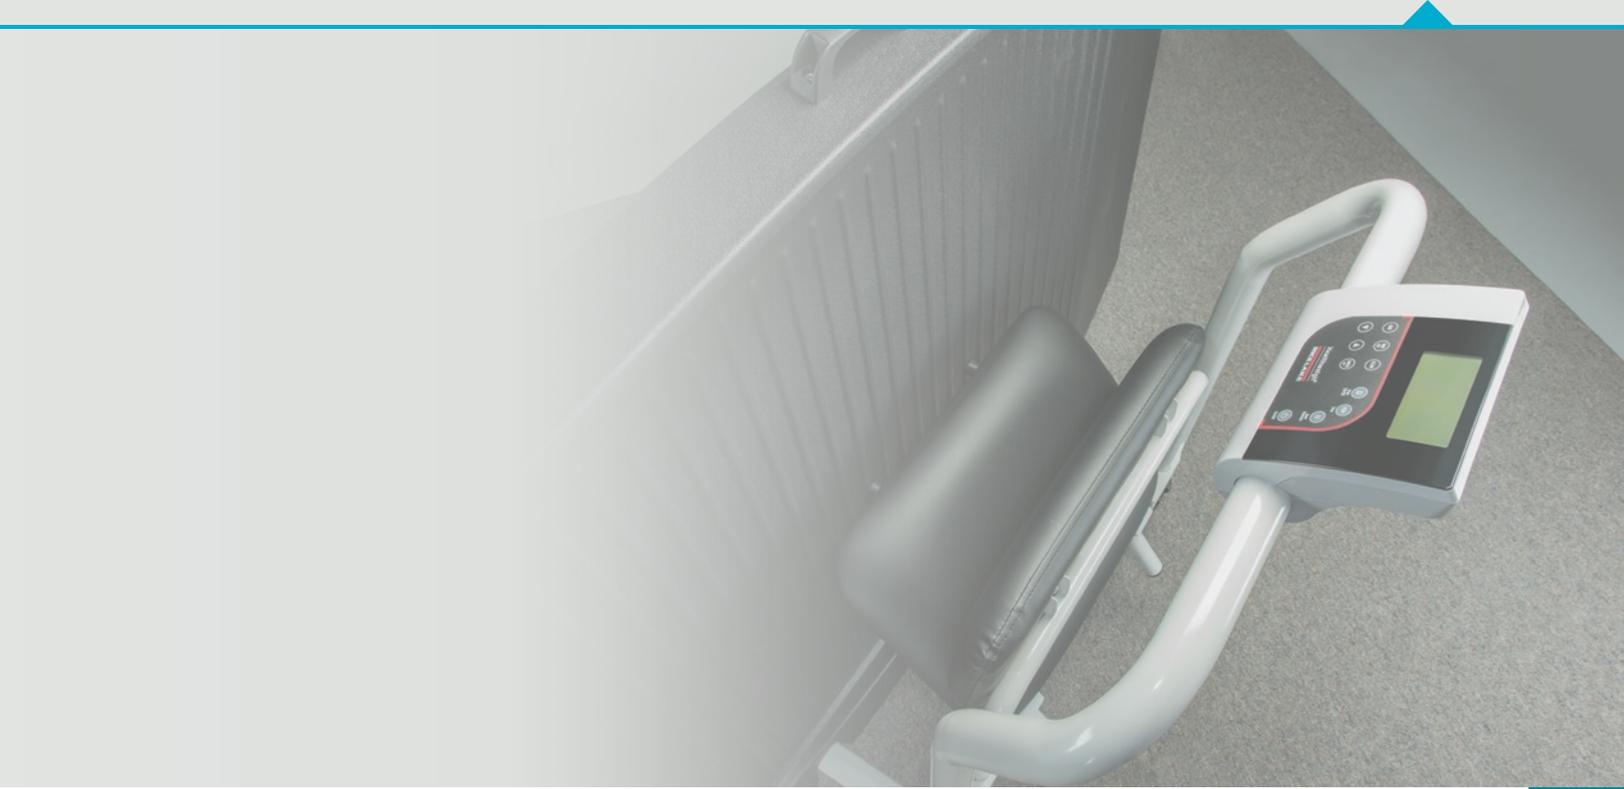

WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
350-10-4	1,000 × 0.2lb (450 × 0.1 kg)	USB	141448
350-10-4BLE	1,000 × 0.2lb (450 × 0.1 kg)	Bluetooth® BLE 4.0	194737

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching c-MET* <i>Medical grade power supply</i>	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
350-10-4	141448	51	43	21	132	332	332
350-10-4BLE	194737	51	43	21	132	332	332

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	48.5	123.2	E	38.0	96.5
B	32.0	81.3	F	45.0	114.3
C	2.4	6.1	G	6.3	16.0
D	9.3	23.6	H	12.0	30.5

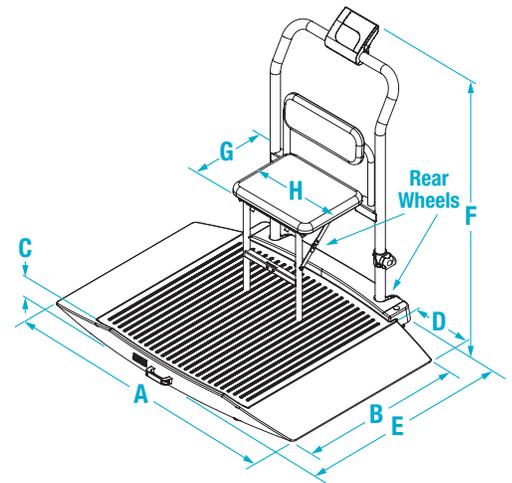

An ISO 9001 Registered Company ©2024 Rice Lake Weighing Systems 03/24
Specifications subject to change without notice. Visit ricelake.com



350-10-7

SINGLE-RAMP WHEELCHAIR PLATFORM SCALE

Rice Lake's 350-10-7 single-ramp wheelchair platform scale allows high capacity, accurate weighing for a wide range of patients. Convenient keypad tare reduces errors and increases efficiency. This sturdy scale is easily transported on two heavy-duty rear wheels to any location.

FEATURES

- Two wheels for portability
- Single ramp
- Nonslip platform
- Large 1-inch LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions Without Ramp:

(L × W × H)

29.5 × 32.0 × 2.4 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours of continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50 °F to 104 °F (10 °C to 40 °C)

Cable Length:

7 ft (2.1 m) cable between scale base and indicator

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited





WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
350-10-7	1,000 × 0.2lb (450 × 0.1kg)	USB	141446
350-10-7BLE	1,000 × 0.2lb (450 × 0.1kg)	Bluetooth® BLE 4.0	194738

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
350-10-7	141446	45	44	7	78	100	100
350-10-7BLE	194738	45	44	7	78	100	100

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	29.5	74.9	D	9.3	23.5
B	32.0	81.3	E	37.5	95.3
C	2.4	6.1			

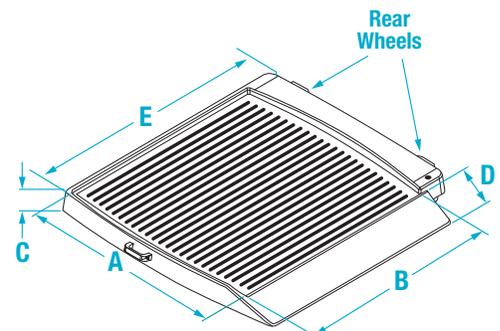

350-10-8

DUAL-RAMP WHEELCHAIR PLATFORM SCALE

Rice Lake's 350-10-8 dual-ramp wheelchair platform scale allows high capacity, accurate weighing for a wide range of patients. Convenient keypad tare reduces errors and increases efficiency. This sturdy scale is easily transported on two heavy-duty rear wheels to any location.

FEATURES

- Two wheels for portability
- Dual ramp
- Nonslip platform
- Large 1-inch LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions Without Ramps:

(L × W × H)

29.5 × 32.0 × 2.4 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours of continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50 °F to 104 °F (10 °C to 40 °C)

Cable Length:

7 ft (2.1 m) cable between scale base and indicator

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited





WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
350-10-8	1,000 × 0.2lb (450 × 0.1 kg)	USB	141449
350-10-8BLE	1,000 × 0.2lb (450 × 0.1 kg)	Bluetooth® BLE 4.0	194735

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
350-10-8	141449	53	45	7	86	121	121
350-10-8BLE	194735	53	45	7	86	121	121

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	48.5	123.2	D	9.3	23.6
B	32.0	81.3	E	38.0	96.5
C	2.4	6.1			

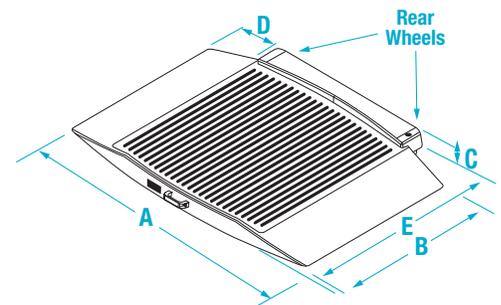

An ISO 9001 Registered Company ©2024 Rice Lake Weighing Systems 03/24 Specifications subject to change without notice. Visit ricelake.com



34 INCHES WIDE

RL-350-5

SINGLE-RAMP PORTABLE BARIATRIC WHEELCHAIR SCALE

Rice Lake's RL-350-5 single-ramp portable bariatric wheelchair scale allows high-capacity, accurate weighing for patients who are unable to be transported to a scale. Featuring a 34-inch scale base with single ramp, wheelchairs can easily be wheeled on and off the scale. Convenient keypad tare reduces errors and increases efficiency. For added safety, this scale features an anti-slip rubber surface and raised edges on the weighing platform.

FEATURES

- Integrated handles and wheels for easy transport
- Single ramp
- Large, stable scale base
- Metal nonslip platform
- Large 1-inch LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function

SPECIFICATIONS

Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions Without Ramp:

(L × W × H)
34.0 × 34.0 × 2.2 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours of continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50 °F to 104 °F (10 °C to 40 °C)

Cable Length:

9 ft (2.7 m) cable between scale base and indicator

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height


Approvals:

c-Met, E113986

Warranty:

Two-year limited



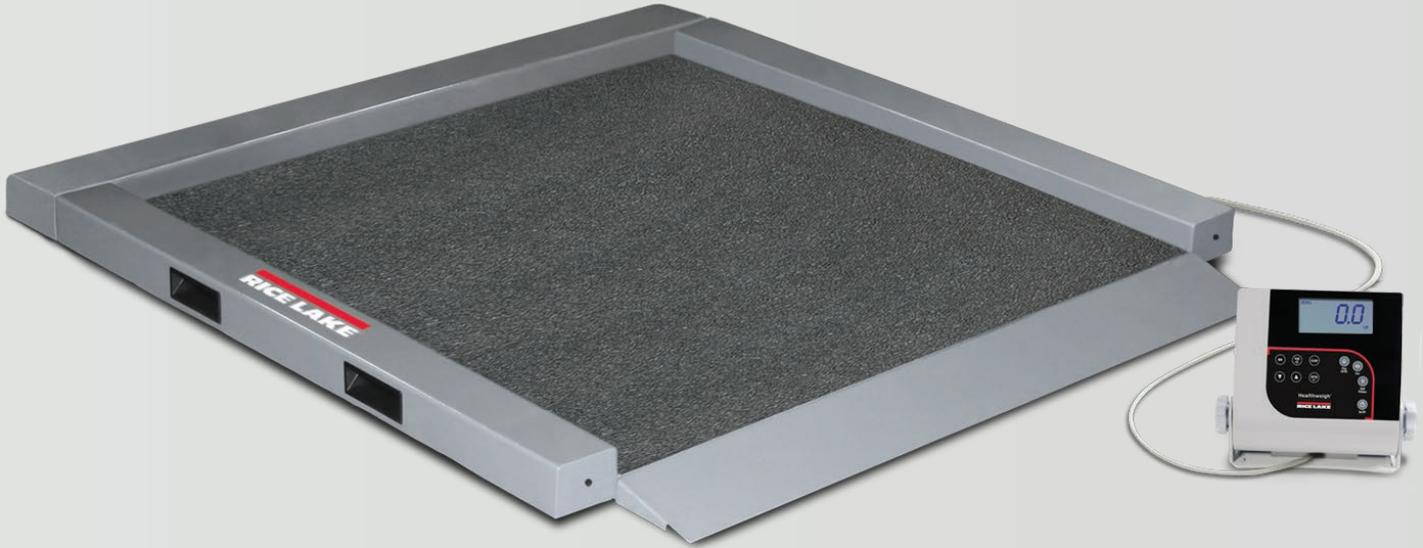

WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
RL-350-5	1,000 × 0.2lb (450 × 0.1 kg)	USB	150703
RL-350-5BLE	1,000 × 0.2lb (450 × 0.1 kg)	Bluetooth® BLE 4.0	205976

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-350-5	150703	43	43	11	154	147	154
RL350-5BLE	205976	43	43	11	154	147	154

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	41.0	104.1	D	34.0	86.4
B	40.0	101.6	E	34.0	86.4
C	2.2	5.6			

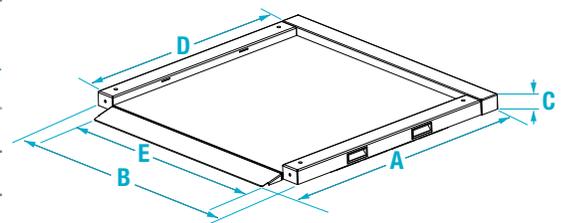

34 INCHES WIDE

RL-350-6

DUAL-RAMP PORTABLE BARIATRIC WHEELCHAIR SCALE

Rice Lake's RL-350-6 dual-ramp portable bariatric wheelchair scale allows high-capacity, accurate weighing for patients who are unable to be transported to a scale. Featuring a 34-inch scale base with dual ramp, wheelchairs can easily be wheeled on and off the scale. Convenient keypad tare reduces errors and increases efficiency. For added safety, this scale features an anti-slip rubber surface and raised edges on the weighing platform.

FEATURES

- Integrated handles and wheels for easy transport
- Dual ramp
- Large, stable scale base
- Metal nonslip platform
- Large 1-inch LCD display
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function

SPECIFICATIONS

Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions Without Ramps:

(L × W × H)

34.0 × 34.0 × 2.2 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours of continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50 °F to 104 °F (10 °C to 40 °C)

Cable Length:

9 ft (2.7 m) cable between scale base and indicator

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height


Approvals:

c-Met, E113986

Warranty:

Two-year limited



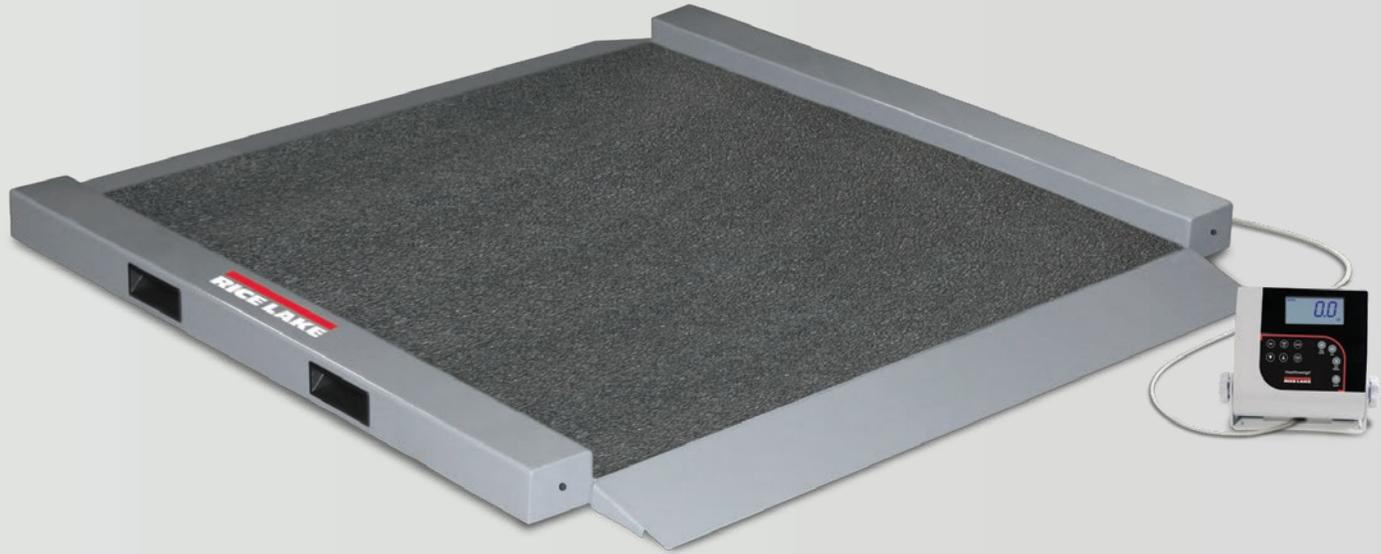

WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
RL-350-6	1,000 × 0.2lb (450 × 0.1 kg)	USB	150704
RL-350-6BLE	1,000 × 0.2lb (450 × 0.1 kg)	Bluetooth® BLE 4.0	205974

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-350-6	150704	43	43	11	162	147	162
RL-350-6BLE	205974	43	43	11	162	147	162

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	41.0	104.1	D	34.0	86.4
B	40.0	101.6	E	34.0	86.4
C	2.2	5.6			

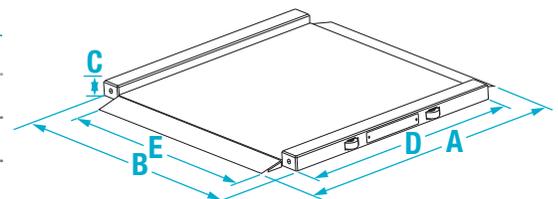

36 INCHES WIDE

SB-1150

BARIATRIC WHEELCHAIR SCALE

The Summit™ SB-1150 bariatric wheelchair scale provides exceptional performance in environments where typical wheelchair scales are not large enough to meet patient needs. With its large platform and easy-access ramp, the heavy-duty Summit SB-1150 accommodates wheelchairs without sacrificing safety. The scale and ramp are equipped with a nonskid rubber surface and raised guide rails. Convenient keypad tare reduces errors and increases efficiency.

FEATURES

- Heavy-duty mild steel construction
- Single ramp
- Large 1-inch LCD display
- Metal nonslip platform
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions:

(L × W × H)

36.0 × 36.0 × 4.0 in

Ramp Dimensions:

(L × W × H)

36.0 × 28.5 × 4.0 in

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50 °F to 104 °F (10 °C to 40 °C)

Cable Length:

10 ft (3.1 m) cable between scale base and indicator

Approvals:

c-Met (pending)

Warranty:

Two-year limited





WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
SB-1150	1,000 × 0.2lb (450 × 0.1 kg)	USB	150706
SB-1150BLE	1,000 × 0.2lb (450 × 0.1 kg)	Bluetooth® BLE 4.0	205977

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830

*NEMA 1-15 Plug  **CEE 7/16 Plug 


SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
SB-1150	150706	49	48	24	363	407	407
SB-1150BLE	205977	49	48	24	363	407	407

*Pallet weight and dimensions are included in shipping weights

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	36.0	91.4	D	36.0	91.4
B	36.0	91.4	E	4.0	10.2
C	28.5	72.4	F	1.0	2.5

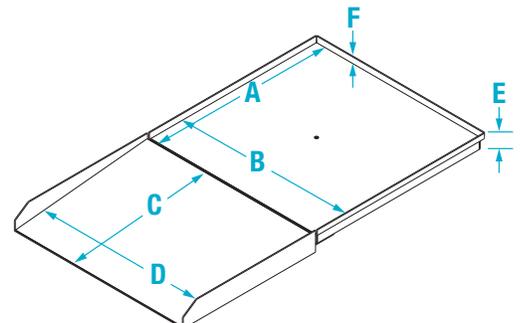



SD-1150-WP

DIALYSIS WHEELCHAIR SCALE

The Summit™ SD-1150-WP dialysis wheelchair scale is designed to accommodate the unique needs of dialysis patients. It is designed to be pit-mounted flush with the floor for multipurpose weighing. Its heavy-duty handrail enhances patient safety and convenience, and is positioned to remain clear of wheelchairs. Convenient keypad tare reduces errors and increases efficiency.

FEATURES

- Package includes scale, pit frame, handrail and indicator
- Heavy-duty mild steel construction
- Handrail for added patient safety
- Large 1-inch LCD display
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:
1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions:
(L × W × H)
36.0 × 36.0 × 3.0 in

Power:
9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:
Six AA alkaline (included)

Battery Use:
25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:
50 °F to 104 °F (10 °C to 40 °C)

Display:
5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:
c-Met, E113986

Warranty:
Two-year limited





WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
SD-1150-WP	1,000 × 0.2 lb (450 × 0.1 kg)	USB	150707
SD-1150-WPBLE	1,000 × 0.2 lb (450 × 0.1 kg)	Bluetooth® BLE 4.0	205978

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830

*NEMA 1-15 Plug  **CEE 7/16 Plug 


SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
SD-1150-WP	150707	40	39	15	246	169	246
SD-1150-WPBLE	205978	40	39	15	246	169	246


*Pallet weight and dimensions are included in shipping weights

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	36.0	91.4	D	31.5	80.0
B	36.0	91.4	E	37.0	94.0
C	3.0	7.6			

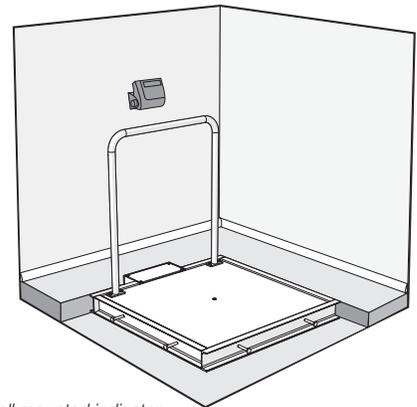

Wall mounted indicator, cable enclosed in customer supplied conduit.

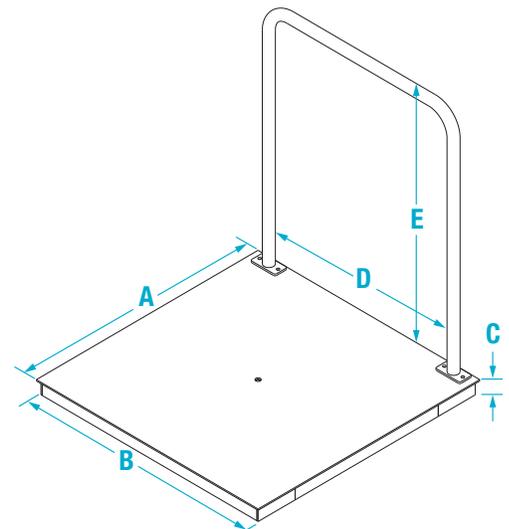



STRETCHER SCALES

350-10-8S

DIGITAL STRETCHER SCALE

The Rice Lake 350-10-8S digital stretcher scale is designed to be the first line of weighing when a patient is being received into a medical facility by a stretcher. The heavy-duty frame and wide ramps enable easy, safe and fast patient processing. Two rubber wheels allow easy and quiet transportation of the scale if needed. Advanced movement compensation technology eliminates involuntary movement made during the weighing process ensuring exact weighing information.



FEATURES

- Two wheels for portability
- Dual ramp
- Metal nonslip platform
- Safety side rails
- Push-button LCD display
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions Without Ramps:

(L × W × H)
29.5 × 35.0 × 2.4 in

Platform Dimensions with Wheels and Ramps:

(L × W × H)
63.7 × 34.2 × 3.7 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Operating Temperature:

50 °F to 104 °F (10 °C to 40 °C)

Cable Length:

7 ft (2.1 m) cable between scale base and indicator

Display:


5-digit LCD display, 0.75 in (1.9 cm) digit height

Approvals:

c-Met, E113986

Warranty:

Two-year limited

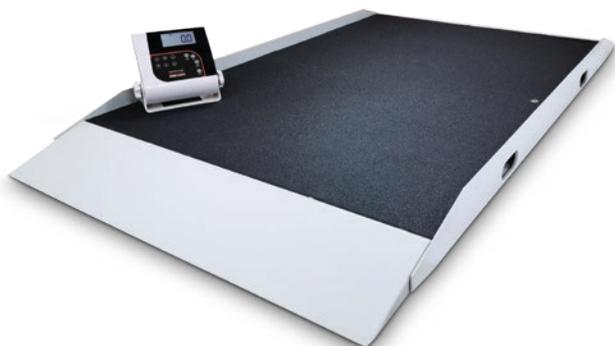



STRETCHER SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
350-10-8S	1,000 × 0.2lb (450 × 0.1 kg)	USB	203622
350-10-8SBLE	1,000 × 0.2lb (450 × 0.1 kg)	Bluetooth® BLE 4.0	203623

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
350-10-8S	203622	67.2	36	6	154	104	154
350-10-8SBLE	203623	67.2	36	6	154	104	154

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	63.8	162.0	D	32.9	83.6
B	49.3	125.3	E	3.9	9.8
C	32.7	83.1	F	2.6	6.7

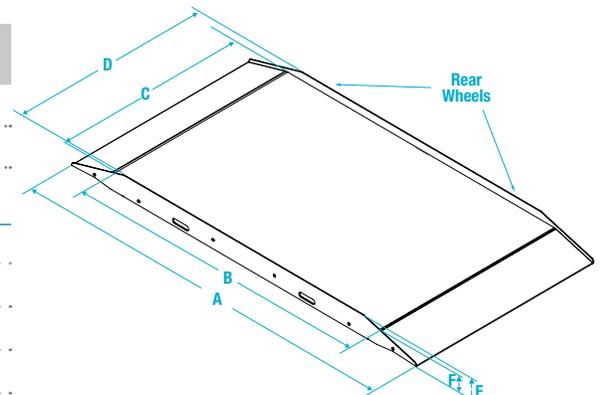

PG 57





CHAIR SCALES
DIGITAL AND MECHANICAL

17-INCH-WIDE
SEAT

550-10-1

DIGITAL CHAIR SCALE

The Rice Lake 550-10-1 digital chair scale is designed for patients who find it difficult to, or cannot, stand. The molded plastic seat is easy to clean, comfortable and safe up to 660 pounds. Swing-up arms enable easy access from either side, and a flip-up footrest can be used for additional patient comfort. A large push-button display lights up for easy viewing and an audible beep sounds at the end of each weigh cycle.

FEATURES

- Enameled tubular steel frame
- Four heavy-duty locking caster wheels
- Swing-up arms
- Flip-up footrest
- Large 1-inch LCD display
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:

660 × 0.2 lb (300 × 0.1 kg)

Power:

9 VDC provided by six AA alkaline batteries (included) or 120 V/230 VAC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Operating Temperature:

50 °F to 104 °F (10 °C to 40 °C)


Approvals:

c-Met, E113986

Warranty:

Two-year limited



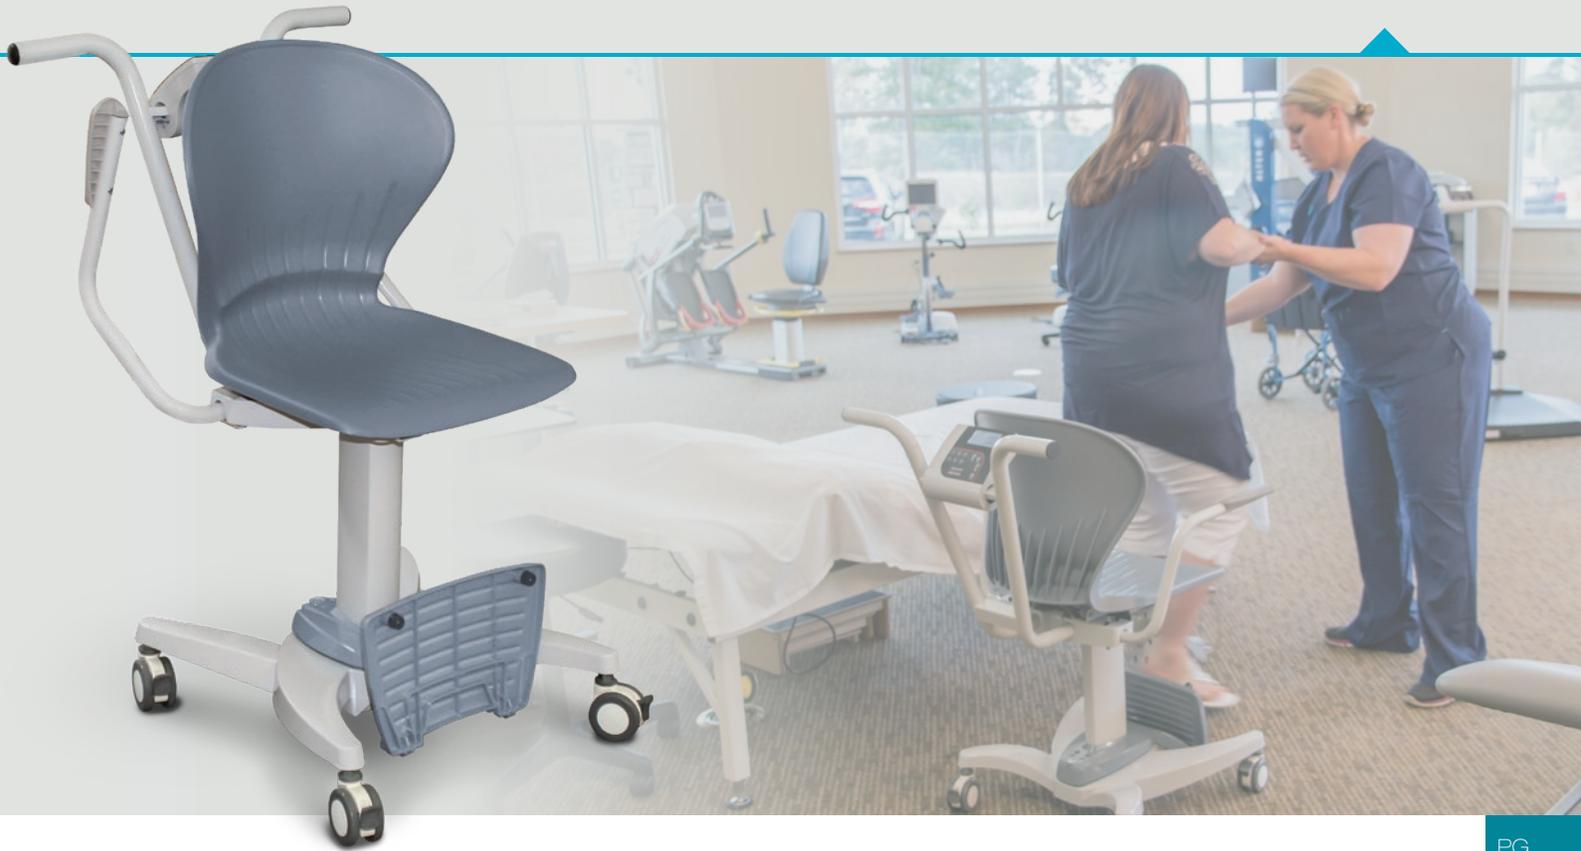

DIGITAL CHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
550-10-1	660 × 0.2lb (300 × 0.1 kg)	USB	119114
550-10-1BLE	660 × 0.2lb (300 × 0.1 kg)	Bluetooth® BLE 4.0	194740

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching c-MET* <i>Medical grade power supply</i>	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091


*NEMA 1-15 Plug  **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
550-10-1	119114	29	27	29	54	164	164
550-10-1BLE	194740	29	27	29	54	164	164

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	37.4	95.0	E	17.0	43.2
B	33.4	85.0	F	16.0	40.6
C	25.2	64.0	G	17.0	43.2
D	21.0	53.3	H	20.5	52.0

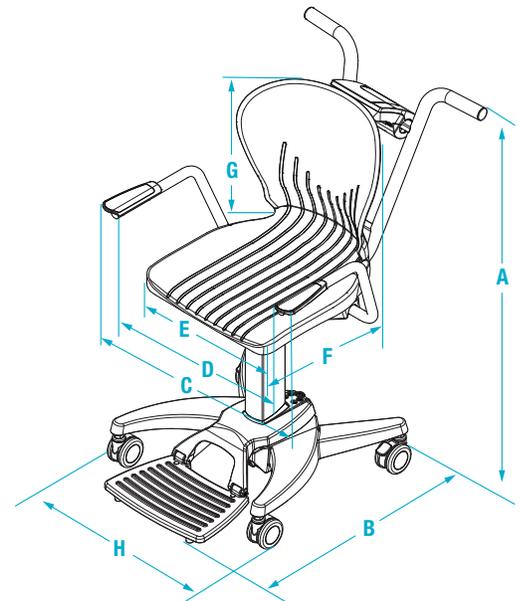

An ISO 9001 Registered Company ©2024 Rice Lake Weighing Systems 03/24
Specifications subject to change without notice. Visit ricelake.com



20-INCH-WIDE
SEAT

560-10-1

DIGITAL CHAIR SCALE

The Rice Lake 560-10-1 digital chair scale is designed for patients who find it difficult to, or cannot, stand. Two armrests and two footrests can be lifted separately for convenient patient access. The 20-inch-wide molded plastic seat is easy to clean, comfortable and safe up to 660 pounds. A large push-button display lights up for easy viewing and an audible beep sounds at the end of each weigh cycle.

FEATURES

- Enameled tubular steel frame
- Four heavy-duty caster wheels (rear wheels locking)
- Swing-up arms
- Side-folding footrests
- Molded seat
- Large 1-inch LCD display
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:

660 × 0.2 lb (300 × 0.1 kg)

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Power:

9 VDC provided by six AA alkaline batteries (included) or 120 V/230 VAC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Warranty:

Two-year limited





DIGITAL CHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
560-10-1	660 × 0.2lb (300 × 0.1 kg)	USB	166644

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091

*NEMA 1-15 Plug



**CEE 7/16 Plug





SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
560-10-1	166644	33	23	27	65	148	148

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	20.1	51.1	E	5.9	15.0
B	17.3	44.0	F	42.9	109.0
C	20.1	51.1	G	34.6	88.0
D	36.4	92.5			

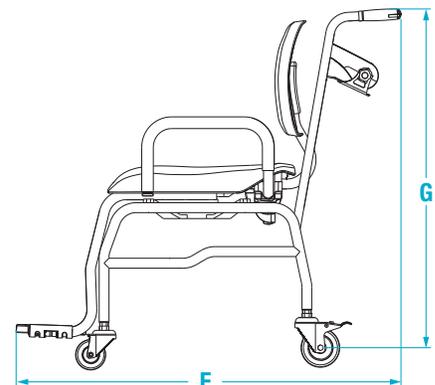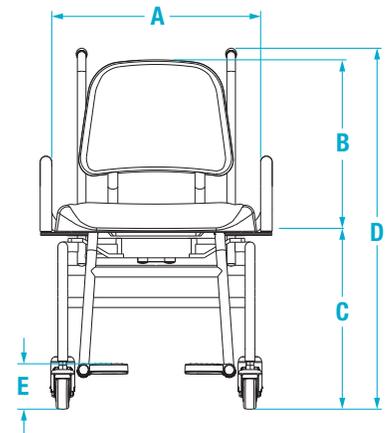

16-INCH-WIDE
SEAT

RL-MCS MECHANICAL CHAIR SCALE

The Rice Lake mechanical chair scale is designed for weighing those who find it difficult or unsafe to stand on a conventional scale. The smooth, durable, molded plastic seat is comfortable, and the swing-up arms lift for easy patient transport. The sturdy enameled steel frame has four heavy-duty wheels for easy, quiet maneuvering. Clinics, nursing homes and rehabilitation centers will find the sleek professional design easy to clean.

FEATURES

- Swing-up arms for easy access and exit
- Polypropylene seat with ABS armrests
- Fold-up footrest
- Heavy-duty wheels; two back wheels lock, two front wheels swivel
- Sturdy enameled, steel frame
- Dual read die-cast beam

SPECIFICATIONS

Capacity:

Lb only beam 450 lb × 4 oz
Kg only beam 200 kg × 100 g

Warranty:

Two-year limited





MECHANICAL CHAIR SCALE



MODEL	CAPACITY	PART #
RL-MCS-LB	450lb x 4oz	172098
RL-MCS-KG	200kg x 100g	172099

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-MCS-LB	172098	29	25	25	79	131	131
RL-MCS-KG	172099	29	25	25	79	131	131

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	21.5	54.6	D	16.0	40.6
B	14.2	36.1	E	35.7	90.7
C	14.8	37.6	F	38.4	97.5

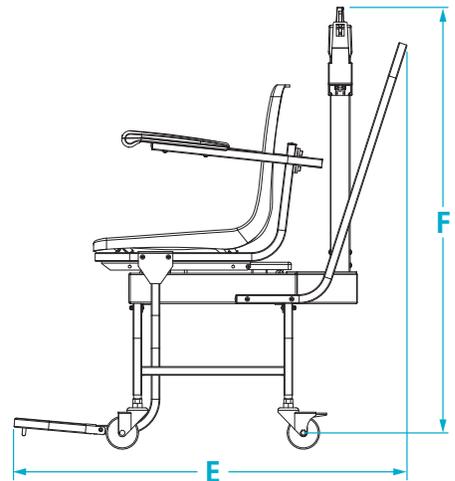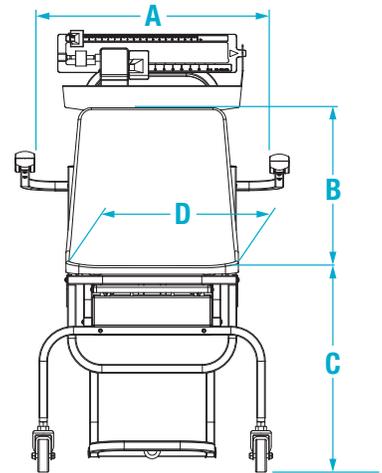



Healthweigh®

ZERO
0.0000
GROSS



ON/OFF

REWEIGH

HOLD
RELEASE

TARE

ZERO



ENTER

UNITS
CLEAR

RICE LAKE
WEIGHING SYSTEMS

PEDIATRIC SCALES
DIGITAL AND MECHANICAL

RL-DBS

DIGITAL BABY SCALE

The RL-DBS digital baby scale accurately weighs and measures even the most active babies. Simply place the baby on the scale, remove the baby and recall its weight by pressing the Recall key. The RL-DBS is portable, extremely durable, and easy to clean and maintain.

FEATURES

- Large 1-inch LCD display
- Unit of measure locking
- Recall function to view last weight
- Automatic shut-off for long battery life
- Built-in measuring tape
- Optional carrying case

SPECIFICATIONS

Capacity:
44 lb × 0.5 oz (20 kg × 10 g)

Power:
Four AA alkaline batteries (included) or
AC adapter (included)

Battery Type:
Four AA alkaline (included)

Measuring Tape:
0 to 22.5 in (0 to 57 cm)

Approvals:
AC adapter: cULus

Warranty:
Two-year limited



Optional carrying case





DIGITAL BABY SCALE

MODEL	CAPACITY		PART #
RL-DBS	44 lb x 0.5 oz (20 kg x 10 g)	120V AC adapter	107423
RL-DBS	44 lb x 0.5 oz (20 kg x 10 g)	230V AC adapter	112571

OPTIONS




DESCRIPTION	PART #
Carrying case	112570

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-DBS 120 V	107423	27	18	7	10	21	21
RL-DBS 230 V	112571	27	18	7	10	21	21

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	3.9	10.0	D	23.6	60.0
B	15.0	38.0	E	11.0	27.9
C	3.1	7.9			

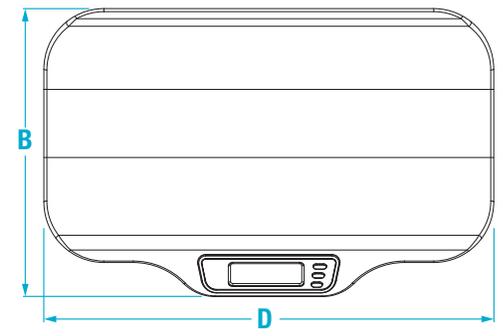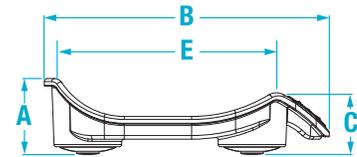

DUAL RANGE

RL-DBS-2

DIGITAL BABY SCALE

The RL-DBS-2 digital baby scale accurately weighs and measures even the most active babies, up to 44 pounds. Dual-range functionality provides enhanced precision for weighments from zero to 22 pounds with accuracy within 0.2 ounces. Simply place the baby on the scale, remove the baby and recall its weight by pressing the Recall key. The RL-DBS-2 is portable, extremely durable, and easy to clean and maintain.

FEATURES

- Large 1-inch LCD display
- Dual-range capacity for increased precision
- Accuracy within 5 g
- Unit of measure locking
- Recall function to view last weight
- Automatic shut-off for long battery life
- Built-in measuring tape
- Optional carrying case

SPECIFICATIONS

Capacity:

Range 1: 0 to 22 lb × 0.2 oz
(0 to 10 kg × 5 g)

Range 2: 22 to 44 lb × 0.5 oz
(10 to 20 kg × 10 g)

Power:

Four AA alkaline batteries (included) or
AC adapter (included)

Battery Type:

Four AA alkaline (included)

Measuring Tape:

0 to 22.5 in (0 to 57 cm)

Approvals:

AC adapter: cULus

Warranty:

Two-year limited



Optional carrying case





DIGITAL BABY SCALE DUAL RANGE

MODEL	CAPACITY		PART #
RL-DBS-2	0 to 22lb x 0.2oz, 22 to 44lb x 0.5oz (0 to 10kg x 5g, 10 to 20kg x 10g)	120V AC adapter	155922
RL-DBS-2	0 to 22lb x 0.2oz, 22 to 44lb x 0.5oz (0 to 10kg x 5g, 10 to 20kg x 10g)	230V AC adapter	155923

OPTIONS




DESCRIPTION	PART #
Carrying case	112570

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-DBS-2 120 V	155922	27	18	7	10	21	21
RL-DBS-2 230 V	155923	27	18	7	10	21	21

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	3.9	10.0	D	23.6	60.0
B	15.0	38.0	E	11.0	27.9
C	3.1	7.9			

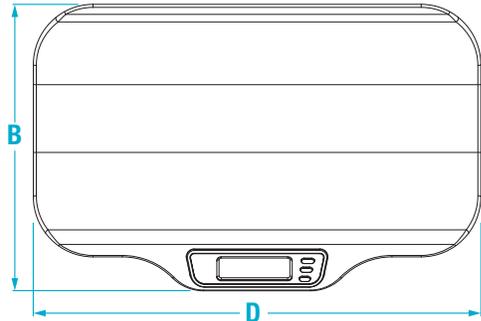

PG
71



DUAL RANGE

650-10-1 NEONATAL SCALE

The 650-10-1 neonatal baby scale precisely weighs even the most active babies, up to 33 pounds. Motiontrap™ movement compensation technology compensates for involuntary movements and provides a stable, accurate weight reading. Enhanced precision is essential especially when weighing premature infants. The 650-10-1 provides these precise weighments from zero to 10 pounds with accuracy within 0.05 ounces. A two-sided removable tray keeps babies safe and a built-in measuring tape ensures quick and easy measurements.

FEATURES

- LCD display
- Dual-range capacity for increased precision
- Unit of measure locking
- Automatic shut-off for long battery life
- Motiontrap™ movement compensation technology
- Built-in measuring tape

SPECIFICATIONS

Capacity:

Range 1: 0 to 10 lb × 0.05 oz
(0 to 5 kg × 1 g)
Range 2: 10 to 33 lb × 0.1 oz
(5 to 15 kg × 2 g)

Power:

9 VDC, provided by six AA lithium batteries (included) or AC adapter (optional)

Measuring Tape:

0 to 23.5 in × 0.125 in
(0 to 60 cm × 0.25 cm)

Battery Type:

Six LifeS2 batteries

Operating Temperature:

50 °F to 95 °F (10 °C to 35 °C)

Display:

5-digit LCD display, 0.75 in (1.9 mm) digit height

Approvals:

c-Met E113986

Warranty:

Two-year limited





NEONATAL SCALE

MODEL	CAPACITY	POWER	PART #
650-10-1	0 to 10lb x 0.05 oz, 10 to 33lb x 0.1 oz (0 to 5kg x 1g, 5 to 15kg x 2g)	120V/230V	161784

OPTIONS


DESCRIPTION	PART #
AC adapter, c-Met, medical grade	165138

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
650-10-1	161784	18	28	11	25	40	40

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	24.0	60.8	D	17.0	43.2
B	19.0	48.2	E	3.5	8.9
C	6.8	17.1			

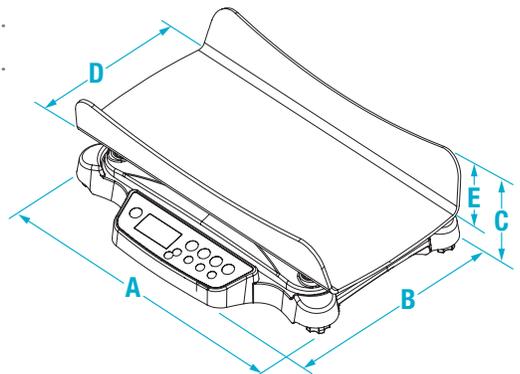

LB & KG

RL-MIS MECHANICAL BABY SCALE

The RL-MIS mechanical baby scale provides safe, reliable measurement for infants of all sizes. An easy-to-clean tray also features a built-in measurement tape for simple length reference. The sturdy, painted beam offers dual-read capacity up to 135 pounds or 62 kilograms.

FEATURES

- Painted beam
- Sturdy, enameled steel body
- Easy-to-clean ABS plastic tray
- Dual-read capacity; lb and kg
- Built-in measuring tape

SPECIFICATIONS

Capacity:
135 lb × 1 oz (62 kg × 20 g)

Measuring Tape:
Measures 0 to 23 in
(0 to 58 cm)

Warranty:
Two-year limited





MECHANICAL BABY SCALE - LB AND KG BEAM



MODEL	CAPACITY	PART #
RL-MIS	135lb x 1 oz (62kg x 20g)	131470

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-MIS	131470	28	20	14	30	57	57

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	24.0	61.0	D	16.5	42
B	27.0	68.6	E	2.7	6.8
C	21.5	54.5			

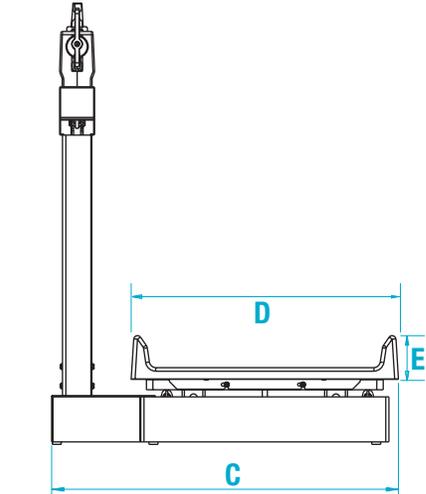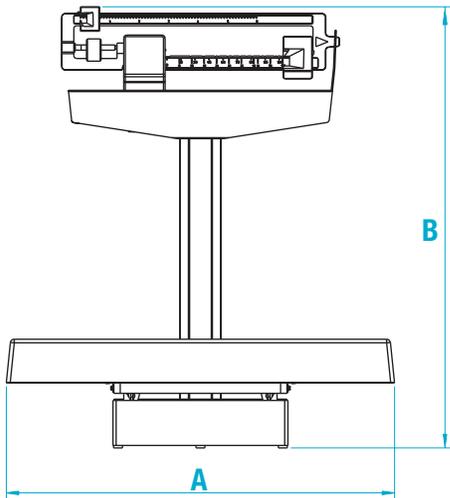

PG 75



KG Only

RL-MIS-20

MECHANICAL BABY SCALE

The RL-MIS-20 mechanical baby scale provides safe, reliable metric measurements for infants of all sizes. An easy-to-clean tray also features a built-in measurement tape for simple length reference. The sturdy, painted beam offers capacity readings up to 70 kilograms.

FEATURES


- Painted beam
- Sturdy, enameled steel body
- Easy-to-clean ABS plastic tray
- Unit of measure: kg
- Built-in measuring tape

SPECIFICATIONS

Capacity:
70 kg × 20 g

Measuring Tape:
0 to 58 cm



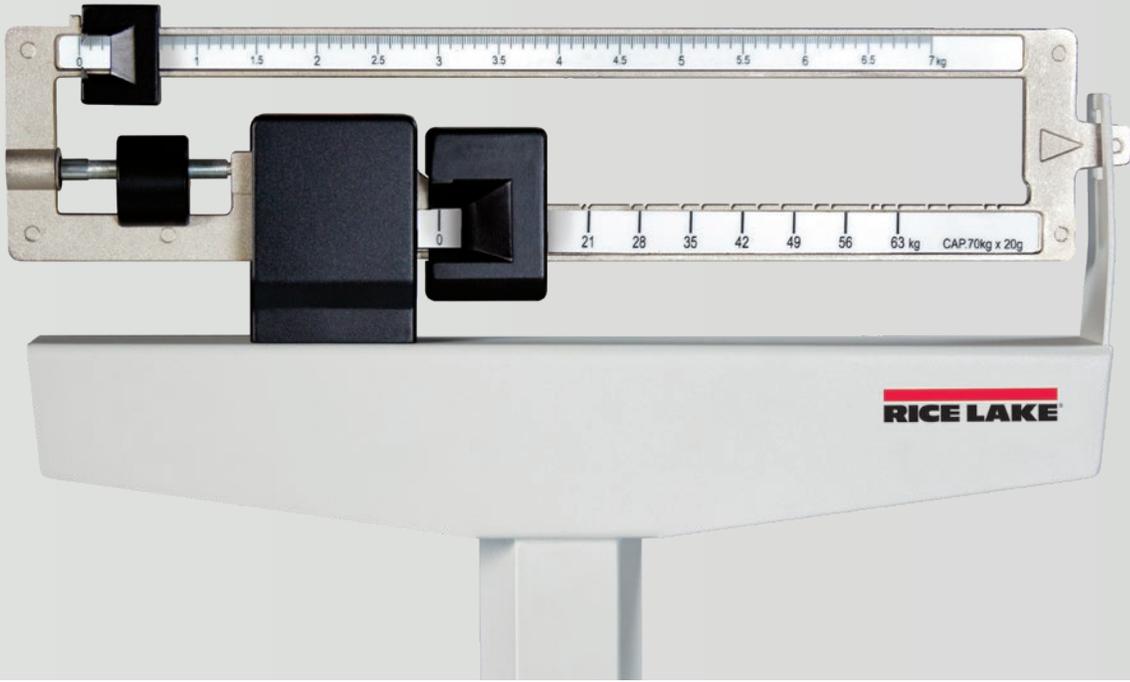

MECHANICAL BABY SCALE



MODEL	CAPACITY	PART #
RL-MIS-20	70kg x 20g	131471

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-MIS-20	131471	28	20	14	30	57	57

DIMENSIONS

	CENTIMETERS			CENTIMETERS	
A	61.0		D	42	
B	68.6		E	6.8	
C	54.5				

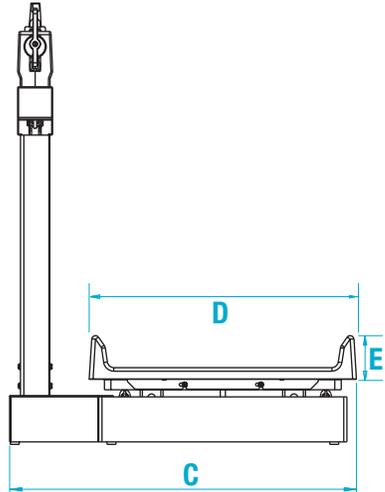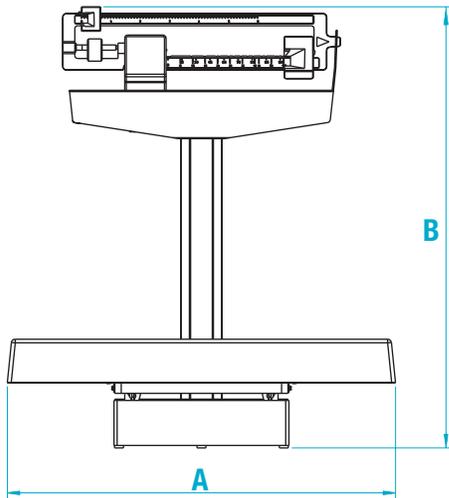

PG 77





DIGITAL BABY SCALE

SUSPENDED INFANT SCALE

The OS-10/OS-25/OS-45 suspended infant scale is a portable device for the safe, accurate weighing of infants and toddlers up to 99 pounds (45 kilograms). Designed for use in any health environment, the OS-10/OS-25/OS-45 suspended infant scale is easily transported and powered by two AA batteries. Conveniently lift the infant using the sturdy steel s-hook attached to the optional canvas trousers. This pediatric scale is versatile in its applications, and the innovative weighing technique captures vital information safely and accurately.

FEATURES

- Hold function
- Units of measure lb/lb, oz/kg
- Adjustable automatic shut-off
- Ergonomic handheld design
- Battery operated, two AA batteries (included)
- Carrying case and top s-hook (included)
- Captured lower hook, removable upper hook (both hooks included)

SPECIFICATIONS

Capacity:

- OS-10:**
 22 lb × 0.02 lb
 22 lb × 0.25 oz
 10 kg × 0.01 kg
- OS-25:**
 55 lb × 0.05 lb
 55 lb × 0.5 oz
 25 kg × 0.02 kg
- OS-45:**
 99 lb × 0.1 lb
 99 lb × 1 oz
 45 kg × 0.05 kg

Power:

Two AA batteries (included)

Operating Temperature:

32 °F to 104 °F (0 °C to 40 °C)

Warranty:

One-year limited

Approvals:

CE Approved



Optional suspended pediatric sling seat trousers



Carrying case

Sturdy steel closed loop S-hook for safety

SUSPENDED INFANT SCALE

MODEL	CAPACITY	PART #
OS-10	22 × 0.02lb (22lb × 0.25 oz) (10 × 0.01 kg)	130292
OS-25	55 × 0.05lb (22lb × 0.5 oz) (25 × 0.02kg)	130293
OS-45	99 × 0.1lb (22lb × 1 oz) (45 × 0.05kg)	130294

OPTIONS


DESCRIPTION	PART #
Suspended pediatric sling seat trousers	141444

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
OS-10	130292	10	5	3	2	2	2
OS-25	130293	10	5	3	2	2	2
OS-45	130294	10	5	3	2	2	2

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	14.3	36.3	C	1.3	3.2
B	3.6	9.2	D	11.6	29.4

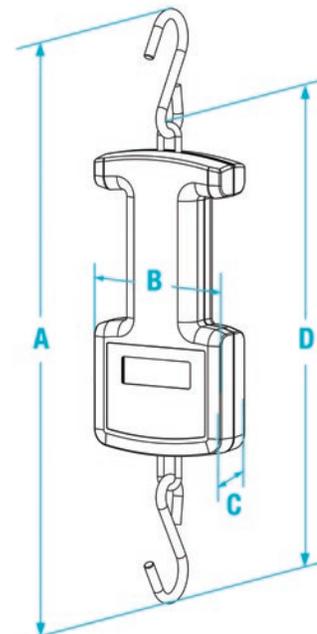



RL-PCT-10

PEDIATRIC CIRCUMFERENCE TAPE

FEATURES

- Button to make tape retract around the measurement surface for accurate body measurements
- Easy-to-read measurements, inches on one side centimeters on the other side
- Compact and portable



PEDIATRIC CIRCUMFERENCE TAPE

MODEL	DESCRIPTION	PART #
RL-PCT-10	0 to 205cm x 1mm; 0 to 80in x 1/8in	186608

RL-WMS-10

WALL MOUNT STADIOMETER

Rice Lake's RL-WMS-10 wall mount stadiometer accurately measures height between 23 and 82 inches (58.4 and 208.2 centimeters). The RL-WMS-10 measures divisions of 1/16 inch (one millimeter). Users can quickly and easily obtain heights in either inches or centimeters. The aluminum-constructed RL-WMS-10 can be folded for compact storage when not in use and includes hardware for wall mounting.



FEATURES

- Aluminum construction
- Measures both inches and centimeters
- Folding headpiece makes the product compact when not in use
- Hardware included for mounting to metal, wood or drywall walls

SPECIFICATIONS

Measurement Range:

23 to 82 in (60 to 210 cm)

Height Divisions:

1/16 in (1 mm)

Warranty:

One-year limited

STADIOMETER

MODEL	CAPACITY	PART #
Master Carton (10 Stadiometers)		
RL-WMS-10	23 to 82 × 1/16in (60 to 120cm × 1 mm)	195263
Single Carton (1 Stadiometer)		
RL-WMS-10	23 to 82 × 1/16in (60 to 120cm × 1 mm)	206553

PG
81



00.0 lb

RICE LAKE
WEIGHING SYSTEMS

HOME HEALTH SCALES

RL-330HHD RL-330HHL DIAL HOME HEALTH SCALE

The RL-330HHL is a dial home health scale that displays weight in pounds while the RL-330HHD is a dial home health scale that displays weight in pounds and kilograms. The expansive steel base features a large nonslip platform and a nearly eight-inch-diameter dial. Colorful markers can be used for record and goal keeping.

RL-330HHD

FEATURES

- Durable steel base and platform
- Nonslip mat
- Large dial display
- Units of measure: lb (RL-330HHL); lb, kg (RL-330HHD)
- Colorful markers to track weight values

SPECIFICATIONS

Capacity:

RL-330HHL: 330 × 1 lb (150 × 0.5 kg)

RL-330HHD: 330 × 1 lb

Warranty:

One-year limited

RL-330HHL



DIAL HOME HEALTH SCALE


MODEL	CAPACITY		PART #
RL-330HHD	330 × 1 lb (150 × 0.5 kg)	lb and kg	113500
RL-330HHL	330 × 1 lb	lb markings only	110592

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
RL-330HHD	113500	19	13	5	9	9	9
RL-330HHL	110592	19	13	5	9	9	9

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	11.2	28.5	C	2.5	6.4
B	16.9	43.0	D	7.9	20.1
E	0.39	8.3	<i>E: (height includes plastic cover)</i>		

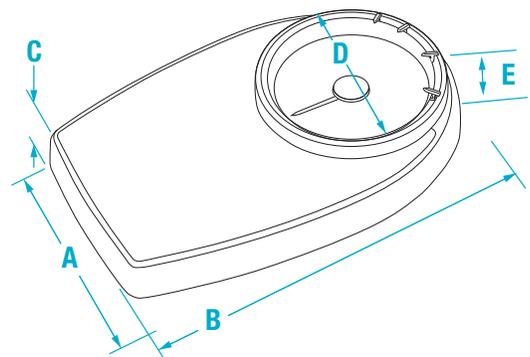

DHH-10

DIGITAL HOME HEALTH SCALE

Rice Lake's DHH-10 digital home health scale is designed to efficiently weigh up to 440 pounds (200 kilograms). Users can alternate between pound and kilogram weighing with a simple press of a button. Featuring a bright LCD display and tempered glass weighing surface, the DHH-10 is battery operated and indicates to users when power is low.

FEATURES

- 8 mm tempered safety glass weighing surface
- Low battery indication
- Display lb or kg
- Large LCD display

SPECIFICATIONS

Capacity:
440 × 0.2 lb (200 × 0.1 kg)

Dimensions:
(L × W × H)
11.8 × 15.4 × 1.0 in

Battery Type:
Two AAA alkaline batteries (included)

Display:
Digit size: 1.75 in

Warranty:
One-year limited

Approvals:
CE Approved





DIAL HOME HEALTH SCALE


MODEL	CAPACITY	PART #
DHH-10	440 x 0.2lb (200 x 0.1 kg)	201124

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
DHH-10	201124	17	13	2	6.5	3.0	6.5

DIMENSIONS

	INCHES	CENTIMETERS
A	15.4	39.0
B	11.8	30.0
C	1.0	2.5

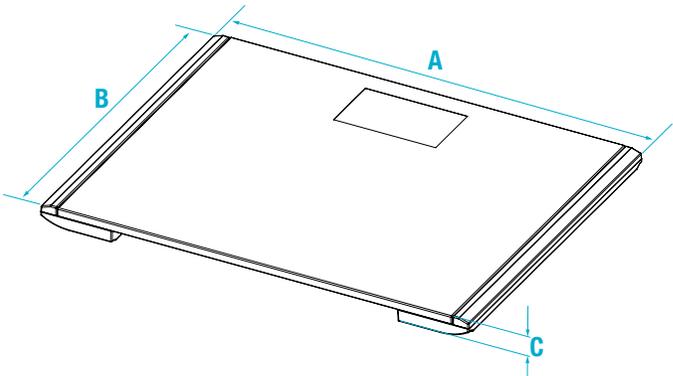



ADDITIONAL PRODUCTS

EQUIPOISE SERIES TOPLOADER BALANCE



FEATURES

- LCD display
- Quick response
- Accumulation, counting and percentage modes
- 13 different units of measure
- Detachable enclosed weighing chamber (in capacities = 1 kg)
- Battery operation for up to 40 hours of continuous use (without backlight)
- RS-232 interface for connecting to printer or PC
- Plastic enclosure

SPECIFICATIONS

Weighing Units:

Gram, Ounce, Pound, Carat, Pennyweight, Troy Ounce, Grain (see technical manual for complete listing)

Operating Modes:

Weighing, Percent Weighing, Parts Counting, Accumulation

Power:

AC adapter (12 V/500 mA); internal rechargeable battery (6 V/1.2 Ah)

Stabilization Time:

2 seconds

Operating Temperature:

32 °F to 104 °F (0 °C to 40 °C)

Calibration Weight:

EQ-300: 300 g, EQ-600: 600 g,
EQ-1500: 1,500 g
EQ-3000: 3,000 g, EQ-6000: 6,000 g

Est. Weight:

6.6 lb (3 kg)

Battery Life:

Up to 40 hours of continuous use (without backlight)

Return Policy:

Rice Lake standard policy

Warranty:

One-year limited

Approval:

CE Approved



TUNING FORK ENHANCED BALANCE

MODEL	CAPACITY	PART #
EQ-300	300 × 0.01 g	165338
EQ-600	600 × 0.02 g	165339
EQ-1500	1,500 × 0.05 g	165340
EQ-3000	3,000 × 0.1 g	165341
EQ-6000	6,000 × 0.2 g	165342

OPTIONS

DESCRIPTION	PART #
Printer cable, DB9M to 25-pin M	41279
SP742 dot matrix printer, tear bar	103142
AbleCable RS-232/USB cable (requires 130789)	119919
Slim line null modem adapter	130789
Aluminum case	131135
AC adapter, 110-240VAC, interchangeable plugs	165183



PN 165183 Multi-range AC adapter and multi-plug

TS SERIES TOPLOADER WASHDOWN BALANCE

FEATURES

- Stainless steel, IP65 top housing
- Large, 18 mm LCD with backlight
- Selectable modes
- 13 units of measurement
- Mono-metal tuning fork sensor (MMTS) provides quick response and stability
- Washdown with IP65 rating
- 115 VAC adapter included (230 VAC optional)
- Semi-automatic calibration, external weight
- RS-232 interface for connecting to printer or PC

OPTIONS

- Battery holder
- Underweigh hook
- Waterproof RS-232 cable

SPECIFICATIONS

Weighing Units:

Carat, Pennyweight, Troy Ounce, Decimal Ounce, Decimal Pound (See technical manual for complete listing)

Operating Modes:

Weight, Count, Percentage, Limit Function (Checkweighing)

Power:

120 VAC (adapter included)

Battery Option:

Nickel-cadmium battery, 12-hour run time, 24-hour charge time

RS-232 Baud Rate:

1200/2400/2800/9600;
Data bits-8, Connector-DIN 5-pin

Calibration Weight:

TP-620: 600 g
TP-6200: 6,000 g
TP-8200: 8,000 g

Operating Temperature:

41 °F to 95 °F (5 °C to 35 °C)

Est. Weight:

6.2 lb (2.8 kg)

Warranty:

Five-year limited

Return Policy:

Rice Lake standard policy





TUNING FORK ENHANCED BALANCE

MODEL	CAPACITY	PART #
TS-620	620 × 0.01 g	165338
TS-6200	6,200 × 0.1 g	165339
TS-8200	8,200 × 0.1 g	165340

OPTIONS

DESCRIPTION	PART #
AC adapter, multi-range 110:230 V AC, 6 V DC	108499
9-pin D-sub F-25-Pin D-sub connector	72440
9-pin D-sub F to blunt end	22436
Null modem cable	66535
Slimline adapter, null modem gender changer	119064
Underweigh hook	109236
Waterproof RS-232 cable	109238
Additional operating manual	109050
Battery operator manual	112611
Battery holder option, requires Four AA batteries (not included)	112516
AbleCable, requires null modem cable PN 66535	119919



PN 108499 Multi-range AC adapter and multi-plug



Legal for Trade,
ideal for cannabis

TE SERIES TUNING FORK ENHANCED BALANCE

FEATURES

- External weight calibration
- Seven-segment (main)/16-segment (sub) display
- Selectable modes: Weighing, Counting, Percentage, Coefficient, Specific Gravity, Statistics, Animal and Formulation
- Mono-metal tuning fork technology (MMTF) provides quick response and stability
- 30-step bar graph display
- AA dry-cell port, (150 hours continuous use with LCD backlight and communication signal ON)
- RS-232 interface for connecting to printer or PC
- Glass breeze break (TE-223, TE-322NC and TE-623 only)



SPECIFICATIONS

Weighing Units:

Milligram, Gram, Ounce, Pound, Carat, Pennyweight, Troy Ounce (see technical manual for complete listing)

Operating Modes:

Weighing, Counting, Percentage, Coefficient, Specific Gravity, Statistics, Animal, Formulation

Power:

100 to 240 VAC adapter, AA dry cell (batteries not included)

Operating Temperature:

41 °F to 95 °F (5 °C to 35 °C)

Est. Weight:

TE-223 / 322NC: 6.5 lb (3 kg)
TE-623 / 3202 / 6202 / 15001 / 1501NC / 8200NC: 6.0 lb (2.7 kg)

Warranty:

Five-year limited

Return Policy:

Rice Lake standard policy

Approvals:

NTEP Certified CC 17-104A2
Measurement Canada AM-6169

TUNING FORK ENHANCED BALANCE

MODEL	CAPACITY	PART #
TE-223	220 × 0.001 g	187600
TE-623	620 × 0.001 g	186030
TE-3202	3,200 × 0.01 g	186035
TE-6202	6,200 × 0.01 g	186036
TE-15001	15,000 × 0.1 g	186037
NTEP AND MEASUREMENT CANADA APPROVED		
TE-322NC	320 × 0.01 g	204688
TE-1501NC	1,500 × 0.1 g	204689
TE-8200NC	8,200 × 1 g	204690

OPTIONS

DESCRIPTION	PART #
Power supply 100-240 VAC, 50-60Hz	186074
In-use dust cover 620g models and lower	186075
In-use dust cover 3,200g models and higher	186076
Specific Density Measurement Kit	186077
Ethernet TCP/IP option card	186079

CALIBRATION WEIGHTS

Medical scale calibration requires certified weights that can be traced to the National Institute of Standards and Technology (NIST). This will ensure your scale is calibrated properly and ready for the requirements of weighing in medical settings. Consumer weights such as barbells or similar items may not provide an accurate weight to calibrate your scale. For example, a 5-pound consumer weight, such as a barbell, may actually weigh between 4.75 and 5.25 pounds. Calibration weights with traceability to NIST have a manufactured and adjusted tolerance of +/- 230 milligrams. Using a NIST-traceable calibration weight will ensure your scale is calibrated correctly and presents accurate weighments for proper patient care.



FEATURES

- Cast iron
- Grip handle
- ASTM Class 6
- Imperial or metric
- Made in the U.S.A.

OPTIONS

- Certificate of Calibration
- Stamped serial number

CALIBRATION WEIGHTS

PART NUMBER	DESCRIPTION
IMPERIAL WEIGHTS	
12828	10 lb ASTM Class 7
12870	20 lb ASTM Class 6
12833	25 lb ASTM Class 6
12878	30 lb ASTM Class 6
12839	50 lb ASTM Class 6
METRIC WEIGHTS	
12786	5 kg ASTM Class 7
12767	10 kg ASTM Class 6
12771	20 kg ASTM Class 6
12775	25 kg ASTM Class 6
105414	5 kg OIML Class M1
105415	10 kg OIML Class M1
105416	20 kg OIML Class M1



ADDITIONAL RICE LAKE PRODUCTS FOR YOUR FACILITY

PG
96

Rice Lake is dedicated to providing weighing solutions that are useful for every part of your facility, including nutrition services, housekeeping and waste management as well as the pharmacy and lab. Read below for information about equipment that may be used to support facility operations.

BENCH SCALES

For mobility and convenience, bench scales offer ideal features that are adaptable to a wide range of needs in a healthcare facility. Rice Lake can provide a bench scale in almost any capacity or requirement.

POSTAL SCALES

Rice Lake's digital postal scale is designed to streamline mailing services in your facility. It has a tempered glass display and can be battery operated for portability. This scale is ideal for small packages and connects directly to the USPS or Canada Post.

FLOOR SCALES

Available in a vast number of capacities, sizes and mounting profiles, Rice Lake's RoughDeck[®] floor scales are ideal for weighing bulk items such as laundry, facility waste, equipment and shipments.

RETAIL SCALES

Used in food services, Rice Lake specializes in point-of-sale (POS) retail scales for accurate food portioning. These versatile weighing solutions feature portability, ease-of-use and precision for food service staff.

For information on Rice Lake's comprehensive line of weighing solutions and extensive in-stock product inventory, visit www.ricelake.com or call one of our helpful representatives at 800-472-6703.

A lifetime of weighing



requires a scale with lifelong support.



Rice Lake Weighing Systems' health scales are backed by 24/7/365 service and support from expert scale technicians, in person or over the phone. Through our local dealer network, we can arrange on-site services.

*We offer the best customer care
so you can give the best patient care.*

We're just a phone call away.

800-472-6703

RICE LAKE[®]
WEIGHING SYSTEMS

www.ricelake.com/health

Rice Lake's Global Family

A tradition of quality and customer service
extended around the world.



NORTH AMERICA

Corporate Headquarters

Rice Lake, Wisconsin

Jasper, Alabama
Fernley, Nevada
Kent, Washington
Concord, California
Newtown, Connecticut
Charlestown, Massachusetts
Monterrey, Mexico
Panama Pacifico, Panama

EUROPE

Modena, Italy
Milan, Italy
Bristol, United Kingdom
Farnham, United Kingdom
Heteren, The Netherlands
Paris, France
Barcelona, Spain

ASIA

Shanghai, China
Chennai, India
Indore, India

OCEANIA

Sydney, Australia

Emergency Contact Information

Call 800-472-6703 and press 1 to reach on-call personnel outside of our normal business hours.

Extended Business Hours

Monday through Friday from 6:30 a.m. to 6:30 p.m. Saturday from 8:00 a.m. to 12:00 p.m. Central Time

RICE LAKE[®]
WEIGHING SYSTEMS

CORPORATE OFFICE

230 W. Coleman Street, Rice Lake, WI 54868 • USA
USA: 800-472-6703 Canada/Mexico: 800-321-6703
Direct: 715-234-9171 Fax: 715-234-6967