

# IP-AI

HAND WRAPPING SYSTEM



**RICE LAKE** | **ISHIDA**  
RETAIL SOLUTIONS

800-472-6703

[www.ricelake.com/retail](http://www.ricelake.com/retail)

# IP-Ai

HAND WRAPPING SYSTEM

## Premier Performance

Ishida's IP-Ai PC-based hand-wrapping system is the ideal complement to high-volume automatic wrappers. The IP-Ai is capable of fast weighing and print speeds up to 5.9 inches per second. Its front-loading large, nine-inch label roll capacity keeps businesses up and running longer. Create eye-catching labels with the ability to store and print custom graphics.

Designed to enhance visibility and productivity, the large color touch screen provides easy access to PLUs via category keys. Networking capability with Ishida's ScaleLink Pro 5 and other third-party scale management software helps maintain consistent and accurate pricing.

From ergonomic design to high-speed performance, the IP-Ai offers the latest technology to streamline prepackaging operations.

### STANDARD FEATURES


- Large 12.1-in color touch screen with printer and scale base
- Front-loading, 9-in (230-mm) label roll capacity
- 3-in thermal head
- Prints all legally required safe-handling, COOL and nutritional information
- Stores and prints graphics for custom labeling
- Ethernet communications
- Adjustable touch screen viewing angle
- 19 tactile keys
- 2 GB of memory
- Over 30 selectable fixed bar code formats
- Flexible setup for ergonomic operation
- Compatible with third-party communication software, including Invatron's PLUM™ and ADC's InterScale™

### OPTIONS AND ACCESSORIES

- ScaleLink Pro 5 scale management software
- Wrap station configurations and all-purpose shelf for Scalemate, (W x D) 14 in x 34 in
- Internal RF communication



Shown with optional equipment

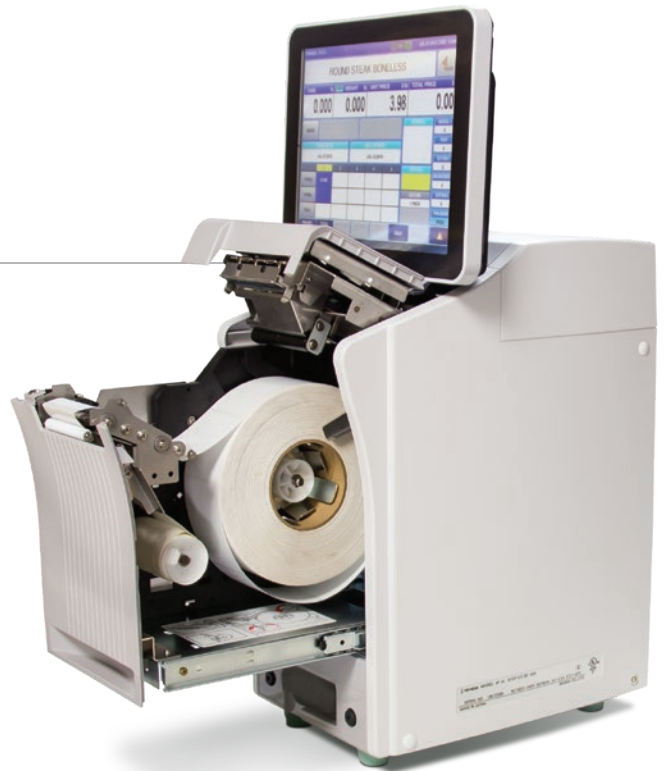

### SPECIFICATIONS

<b>WEIGHING CAPACITY (DUAL RANGE):</b>	0-15 x 0.005 lb, 15-30 x 0.01 lb
<b>OPERATING ENVIRONMENT:</b>	Temperature: 23°F-104°F (-5°C-40°C) Humidity: 20-85% (no condensation)
<b>DISPLAY UNIT:</b>	12.1-in TFT color LCD with LED backlight SVGA (800 x 600)
<b>DISPLAY ITEMS:</b>	Tare: Four-digits Unit Price: Five-digits Weight: Five-digits Six-digits
<b>TOTAL PRICE:</b>	Six-digits
<b>INTERFACE:</b>	USB x 4 channel SD card x 1 channel
<b>MEMORY CAPACITY:</b>	2 GB
<b>COMMUNICATION:</b>	Static TCP/IP 10/100 Base T Ethernet DHCP
<b>PRINT HEAD:</b>	3 in (80 mm) direct thermal (12 dot/mm)
<b>PRINT SPEED:</b>	Up to 5.9 in (150 mm) per second
<b>LABEL SIZE:</b>	Width: 1.5-3.1 in (38-80 mm) Length: 1.2-7.9 in (30-200 mm)
<b>LABEL ROLL:</b>	Inside Diameter: 3.0 in (76 mm) min. Outside Diameter: 9.0 in (230 mm) max.
<b>WEIGHT:</b>	Main Body: 42 lb (19 kg) Scale Unit: 13 lb (6 kg)
<b>POWER SUPPLY:</b>	AC110 V-120 V, 50/60 Hz, 4 A
<b>POWER CONSUMPTION:</b>	Stand-by: 50 W In operation: 120 W
<b>CLASSIFICATION:</b>	NTEP CC 06-029

### WARRANTY

- One-year limited warranty

### APPROVALS

