


# Part Number/Price

Part#	Description	Price
91779	JB4ES excitation trim junction box	Consult
89446	Board only	Consult
165271	Enclosure only (includes cord grips and filter)	Consult

Note: Do not mix junction box models or use other brands of junction boxes with Rice Lake junction boxes. There is a risk of sustem instabilitu.

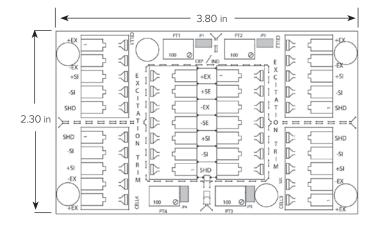

# **Standard Features**

- Jumpers to enable trimming
- PreVent<sup>™</sup> breather vent
- Conformal coated circuit board
- Number of cells: two, three or four single cells
- Expansion port

# **Applications**

• Floor, tank, hopper scales

# **Specifications**

#### **Cable Fittings:**

(4) PG7 0.118 to 0.255 strain relief (2) PG11 0.197 to 0.394 strain relief

# Rating/Material:

NEMA Type 4X Stainless steel

### **Temperature Range:**

Operating: 0 °F to 122 °F (-18 °C to 50 °C)

### Connectors:

Spring clamp screwless, 12 to 28 AWG

# **Trimming:**

Individual cell, excitation trim

# **Potentiometers:**

100 ohm, 25-turn cermet

### **Circuit Board:**

 $3.8 \times 2.3$  in, with conformal coating

**Warranty:** One-year limited

## **Approvals:**

cFMus

