Shown with optional stand and POP label dispenser (121076, 125578)

Specifications

Packs Per Minute:
Up to 15 ppm

Wrapping Capacity:
7.5 lb × 0.005 lb or 7.5 lb × 0.01 lb

Capacity (Dual Range):
15 × 0.005 lb/30 × 0.01 lb

Wrapping Size:
Width: 5.0 to 9.0 in
Length: 5.1 to 12.0 in
Height: max 5.0 in
Tray Height: 1.8 in

Rear Display:
Not available

Tray:
PSP, PP, NET

Film Type:
PVC

Power:
200 to 240V 50/60 Hz, 15A

Print Head:
Direct thermal 2.2 in head (56 mm)

Print Speed:
3.2/ 3.9/ 4.7/ 5.9 in/sec
(80/ 100/ 120/ 150 mm/sec)

Label Size:
Width: 1.2 to 2.5 in (30 to 64 mm)
Length: 0.8 to 7.9 in (20 to 200 mm)

Film Size:
16 to 22 in (400 to 560 mm)

Noise:
75 db

Operating Temperature:
41 °F to 95 °F (5 °C to 35 °C)

Humidity:
20% to 85% relative humidity

Dimensions:
(W × L × H)
27.5 × 33.5 × 27.5 in
(700 × 850 × 700 mm)

Weight:
188 lb (85 kg)

Classification:
NTEP CC 07-099

Warranty:
One-year limited
Based on volume of 900 packs per day

Ishida WM-Nano
Tabletop Wrapper with Integrated Color Touchscreen Scale and Printer

Reduce operator fatigue and increase production with the world's first tabletop automatic wrapper. The WM-Nano is the ideal solution for grocers and markets with limited space needing high performance and consistent wrapping.

The generous infeed accommodates a wide range of trays, wraps up to 7.5 pound packs, and uses film 16 to 22 inches wide.

The WM-Nano employs the power and flexibility of the Ishida Uni-7 RP, with color touchscreen, integrated printer, and Wi-Fi to provide wireless data communication all wrapped up in one super tabletop wrapper.

Standard Features

- 7-inch color LCD touchscreen with backlight and positive input response
- Adjustable touchscreen viewing angle
- Dual-range weighing (0 to 15 lb × 0.005 lb/ 15 to 30 lb × 0.01 lb)
- Front-load label cassette
- Internal wireless communications, 802.11 b/g
- Ethernet communications
- Up to 99 pages of preset keys
- 77 tactile keys
- 4 MB standard memory expandable to 2 GB
- 30+ selectable fixed bar code formats
- Compatible with third-party communication software, including Invatron's PLUM and ADC's InterScale
- Supports 2020 nutritional data requirements

PART #	MODEL	CAPACITY
120674	WM-Nano, tabletop wrapper with integrated color touchscreen scale and printer	15 x 0.005 lb/30 x 0.01 lb

Please refer to the labels section of this catalog for ordering information and case quantity pricing.

WM-Nano Tray List with Suggested Film Sizes

Tray	Dimensions*	Suggested Film Size**	400 mm	450 mm	500 mm
2	8.3 x 5.8 x 1.0 in		√		
2S	8.3 x 5.8 x 0.5 in		√		
4S	9.3 x 7.3 x 0.5 in		√		
4D, 4H, 4P	9.3 x 7.3 x 1.1 in		√		
8S	10.3 x 8.3 x 0.5 in				√
8D, 8H, 8P	10.3 x 8.3 x 1.0 in				√
9L	12.1 x 9.3 x 0.8 in				√
10S	10.8 x 5.8 x 0.5 in		√		
11P	11.5 x 7.1 x 1.2 in				√
12S	11.3 x 9.3 x 0.5 in				√
16S	12.3 x 7.3 x 0.5 in		√		
20S	8.5 x 6.5 x 0.5 in		√		
26D	13.6 x 8.0 x 1.3 in			√	

*Trays vary by manufacturer. Verify the tray dimensions prior to selecting the film sizes for the Ishida WM-Nano.

*****Suggested Film Size** is based on 1-inch product height. Higher product may require larger film. Be mindful that film stretch varies by thickness (gauge), manufacturer and room temperature.*

Ishida WM-Nano
Tabletop Wrapper with Integrated Color Touchscreen Scale and Printer

PART #	MODEL/DESCRIPTION	CAPACITY	EST. SHIPPING WEIGHT	PRICE
120674	WM-Nano, tabletop wrapper with integrated color touchscreen scale and printer	0-15 x 0.005 lb/ 15-30 x 0.01 lb	250 lb (L x W x H) 40 x 35 x 38 in	Consult

Options/Accessories

167774	In-use cover, operator keyboard	Consult
110996	Additional label cassette	Consult
153320	Linerless label cassette	Consult
121076	Stand, stainless steel with leveling legs, 28 x 26 x 27 in (W x D x H)	Consult
125578	Day Glow label dispenser, 25-3/4 x 7-5/8 in aluminum, 20 roll capacity includes the arms that mount the Day Glow dispenser to the stand (PN 121076)	Consult
151761	Day Glow label dispenser spacer, pack of ten	Consult
121077	Plastic washdown cover, short for use with WM-Nano on optional stand	Consult
125417	Plastic washdown cover, tall for use with Day Glow label dispenser	Consult
125832	Power cord, 15A/220V sold per foot	Consult/ft
167454	10 mm additional infeed (consult factory for specifications)	Consult
91870	Compact flash card, for CPU board version PK-260A	Consult
174110	SD memory card, 2 GB, for CPU board version PK-260B	Consult

Communication

160259 **	ScaleLink Pro 5 software CD, license file required and purchased separately (see page 72)	Consult
152628*	ScaleLink Pro 5 license file, one license required per computer	Consult
78860	Cross cable, Ethernet CAT5, 6 ft	Consult

Manuals and Service Tools

132998 **	Additional user's manual	Consult
154792 **	Service manual	Consult
151363 **	Setup manual	Consult
151315	Service key, left door	Consult
151316	Service key, right door	Consult
160906	USB flash memory, 1 GB	Consult

Label Stock

Please refer to labels section of this catalog for ordering information and case quantity pricing

Wrapping Film

181916	400 mm x 1,000 m (15.75 in x 3,280 ft) one box of two rolls	28 lb	Consult
187821	450 mm x 1,000 m (17.72 in x 3,280 ft) one box of two rolls	35 lb	Consult
170110	500 mm x 1,000 m (19.7 in x 3,280 ft) one box of two rolls	38 lb	Consult
203761	550 mm x 1,000 m (21.7 in x 3,280 ft) one box of two rolls	42 lb	Consult

Software key is provided after online registration is completed

**Manuals and software programs can be downloaded from the distributor section of www.ricelake.com/retail.*
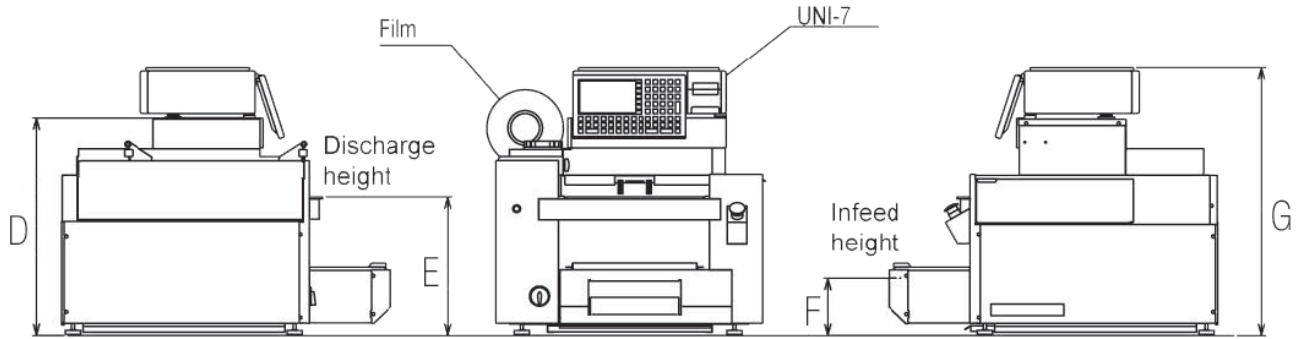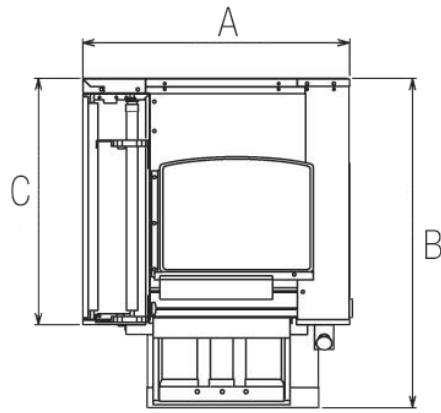
WM-Nano Series Financial Terms and Conditions
Our financial services group reviews open account requests. Upon approval of open account terms, orders may be subject to the following payment terms: 20% down with the order

Ishida WM-Nano

DIMENSIONS			
A	27.6 in (700 mm)	**E**	14.4 in (365 mm)
B	34.1 in (865 mm)	**F**	5.9 in (150 mm)
C	25.6 in (649 mm)	**G**	27.7 in (703 mm)
D	22.5 in (571 mm)		

Top Down

Front