

Farm Bar™

UNIVERSAL SCALE



RICE LAKE®
WEIGHING SYSTEMS

800-472-6703

www.ricelake.com

Farm Bar™

UNIVERSAL SCALE

Unmatched Accuracy and Durability

A Simple Solution for Animal Weighing

Farm Bar animal scales are available in three capacities and cover a variety of weighing applications. These heavy-duty, electronic load cell scales can be mounted under most cattle squeeze chutes, hog crates, feed hoppers and custom platforms.

All-Weather Use


The scale's all-steel construction has been proven over 30 years of field use. There are no moving parts to maintain or wear out, providing years of trouble-free service.

Easy-to-Read Indicator

The Farm Bars come pre-configured with the 380 Synergy Series digital indicator. The indicator has a large backlit LCD display for easy reading, even in direct sunlight, and offer configurable print formats, which makes pairing with an optional printer a breeze. The 380 Synergy is powered by 4 alkaline C-Cell batteries providing many hours of continuous use. An optional external AC power supply is also available to meet the needs of your application.


Factory Calibration

Farm Bar load cells are constructed of rugged steel with precision bearing components balanced and calibrated at the factory for years of worry-free performance. In addition, each Farm Bar has built-in horizontal checking and unique flex bases to ensure accurate weights in even the roughest conditions.

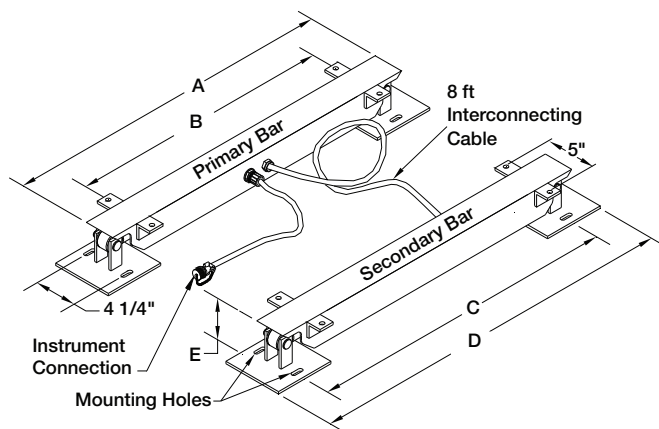

2,500 SCALE PACKAGE FOR ALLEY SCALES

- Ideal for an alleyway scale system or for small animal weighing
- Capacity of 2,500 lb (1,114 kg)
- Finest reading is 0.5 lb (0.2 kg)
- Available length: 22 in
- Bar height: 4 in
- Bar spread: 8 ft



5,000 SCALE PACKAGE FOR MANUAL CHUTES

- Ideal for use under a manual chute
- Capacity of 5,000 lb (2,268 kg)
- Finest reading is 0.5 lb (0.2 kg)
- Available lengths: 28, 33, 36, 40, 44, 48 in
- Bar height: 4 in
- Bar spread: 8 ft



10,000 SCALE PACKAGE FOR HYDRAULIC CHUTES

- Ideal for use under a hydraulic chute or buffalo chute
- Capacity of 10,000 lb (4,536 kg)
- Finest reading is 1.0 lb (0.5 kg)
- Available lengths: 36, 48, 60, 72 in
- Bar height: 4 in
- Bar spread: 8 ft



Farm Bar 2,500U				
A	B*	C	D*	E
22.00 in	15.00 in	19.75 in	25.75 in	4.00 in

Farm Bar 5,000U				
A	B*	C	D*	E
26.00 in	19.00 in	23.75 in	29.75 in	4.00 in
33.00 in	26.00 in	30.75 in	36.75 in	4.00 in
36.00 in	29.00 in	33.75 in	39.75 in	4.00 in
40.00 in	33.00 in	37.75 in	43.75 in	4.00 in
44.00 in	37.00 in	41.75 in	47.75 in	4.00 in
48.00 in	41.00 in	45.75 in	51.75 in	4.00 in

Farm Bar 10,000U				
A	B*	C	D*	E
32.00 in	25.00 in	29.75 in	35.75 in	4.00 in
36.00 in	29.00 in	33.75 in	39.75 in	4.00 in
48.00 in	41.00 in	45.75 in	51.75 in	4.00 in
60.00 in	53.00 in	57.75 in	63.75 in	4.00 in
72.00 in	65.00 in	69.75 in	75.75 in	4.00 in

* B equals dimension A less 7 inches
 * D equals dimension C plus 6 inches

SALES AND TECHNICAL ASSISTANCE

RICE LAKE
WEIGHING SYSTEMS

HEADQUARTERS
230 West Coleman Street
Rice Lake, Wisconsin 54868 - USA
Tel: (715) 234 9171 | Fax: (715) 234 6967
www.ricelake.com