
# DMC-782

PORTABLE COIN COUNTING SCALE





WEIGHING SYSTEMS
To be the best by every measure

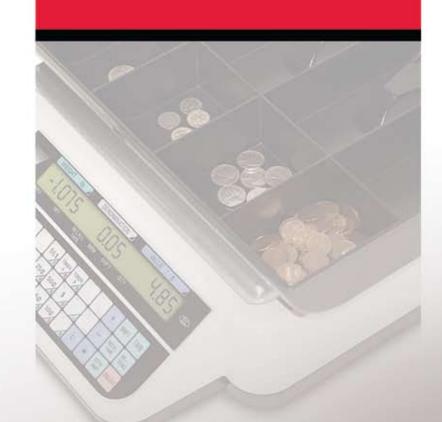

www.ricelake.com

## DMC-782 SERIES PORTABLE COIN COUNTING SCALE





### **Ouick-Count Your Cash**

Coin counting is made easy and accurate by the remarkably precise DMC-782 Coin Counting Scale.

With a resolution of 1/500,000, the DMC-782 counts every coin every time—from mint condition to worn thin, stuck together or corroded. The affordable DMC-782 is rugged and ready to reliably weigh in all environments from retail to factory, and moved from one plant to another. With the optional 300-hour rechargeable battery on board, the DMC-782 is ideal for mobile workstations and outdoor coin collection and counting.

The large platter size accommodates coin containers of all sizes from rolls, envelopes and pouches to the largest cash drawers and bins. The indisputable results are easily read on the DMC-782's backlit LCD display.

Preset keys can be programmed for 18 memory storage locations. Standard US coin values are labeled and the remainder of storage locations can be used for custom tokens or other requirements. Real-time information flows from the DMC-782 to a PC through a standard RS-232 output.

#### **Standard Features**

- 1/500,000 internal counting resolution
- Liquid crystal display (LCD) has bright yellow backlight
- RS-232 output to PC
- Programmable denomination/unit weight and tare weight
- Accumulation feature
- Toggle display count or amount
- Total amount calculation uses reverse counting (Container is tared, coin denomination is removed, container is re-tared to calculate coin count or amount removed.)

#### **Outions/Accessories**

- Rechargeable 300-hour battery\*
- Carrying case, hard-cover with locking latches

#### **Specifications**

Capacity x Resolution: 6 x 0.001lb

> 15 x 0.002lb 60 x 0.01lb

Internal Count 1/500,000 Resolution:

Weight Display

1/7,500 (1/6,000) Resolution: Display: Weight: Five-digits

> Denomination: Five-digits Amount/Quantity: Six-digits

AC 240/230/220 V. Power Supply:

117/100 V (factory preset) DC 6V 5mAh rechargeable

battery (optional)

Rechargeable battery backup for more than 300 hours of continuous usage\*

**Power Consumption:** 18W when using AC power 1.2W for rechargeable battery

(conditions for rechargeable battery only)

Charging Conditions\*\*: Charge Current: 800 mA

Charge Time: 12-14 hours

RS-232: 9 PIN to PC

Operating

Temperature: 14° F to 104° F

(-10° C to +40° C)

Operation Humidity:

15 ~ 85% RH

Platter Size:

12 in x 8.9 in (300 mm x 225 mm)

Dimensions:

113.2 in x 13.7 in x 4.8 in Two-year limited warranty

Warranty:

\*Back-light function off. \*\*For rechargeable battery only.







To be the best by every measure<sup>®</sup>

230 W. Coleman St. • Rice Lake, WI 54868 • USA TEL: 715-234-9171 • FAX: 715-234-6967 • www.ricelake.com