

Checkweighers

TABLE OF CONTENTS

IQ Plus® 2100	308
<i>Digital Bench Scale</i>	
IQ Plus® 2100SL	310
<i>Digital Bench Scale</i>	
CW-90	312
<i>Over/Under Checkweigher</i>	
CW-90X	314
<i>Over/Under Washdown Checkweigher</i>	

Product names, logos, brands and other trademarks featured or referred to within this publication are the property of their respective trademark holders.

IQ Plus® 2100

Digital Bench Scale



IQ plus 2100 with attachment bracket



IQ plus 2100 with column



IQ plus 2100 with tilt stand

Standard Features

- NEMA Type 4X/IP66
- 304 stainless steel construction
- Large, bold 0.8 in LED display
- Status annunciators: lb, kg, oz, g, negative, motion, center of zero
- One full-duplex RS-232 port
- Two digital inputs for remote zero, print and units
- 12 in column, attachment bracket or tilt stand for table, wall or under counter mounting
- Aluminum, single-point load cell
- Overload and upload stops on scale base
- Stainless steel, non-tactile feel, piezo zero and units buttons
- Unit of measure: kg, gm, lb, oz, lb/oz (lb/oz is not Legal for Trade)
- PreVent™ breather vent
- Factory calibrated

Specifications

Power-AC:

Line Voltages
115 or 230 VAC

Frequency:

50 or 60 Hz

Power Consumption:

70 mA at 115 VAC (8 W)
35 mA at 230 VAC (8 W)

Display Resolution:

10,000 graduations maximum

Digital Inputs:

Two inputs, TTL or switch closure, active-low

Scale Frame:

AISI304L, straight line finish, Ra=45 +/- 10

Scale Cover:

AISI304L, straight line finish, Ra=45 +/- 10

Serial Communications:

Full-duplex RS-232; 9600, 4800, 2400, 1200 bps;
seven or eight data bits; even, odd or no parity

Display:

Six-digit light-emitting diode (LED) display
Seven-segment, 0.8 in (20 mm) digits

LED Annunciators:

Negative value, center of zero, motion, kg, g, lb, oz

Keypad:

Two stainless steel piezo switches

Operating Temperature:

14 °F to 104 °F (-10 °C to 40 °C)

Rating/Material:

NEMA Type 4X/IP66, stainless steel

Load Cell:

Aluminum, environmentally sealed

Warranty:

Two-year limited

Approvals:

Indicator:

NTEP CC 00-045 Class III/IIIL 10,000 d
Measurement Canada AM-5374;
cULus listed

Base:

NTEP CC 95-072, Class III 5,000 d



Approvals




Dimensions

Platform Dimensions	L	L1
10 × 10 in	10.25 in	10 in
12 × 12 in	12.25 in	12 in

Note: 1 in=25.4 mm

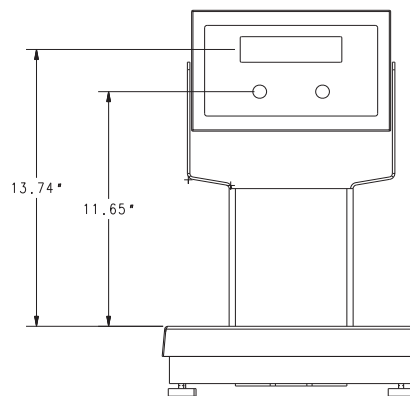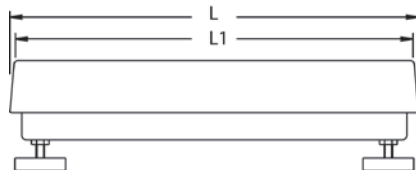

With 12in column

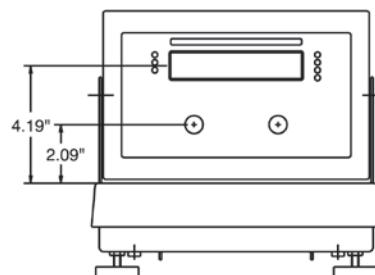

With attachment bracket

CHECKWEIGHERS

Part Number/Price

Part #	Capacity	Platform Size*	Est. Weight	Price
IQ plus 2100 with tilt stand - 115 VAC				
63053 [†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) (2,500 g × 0.5 g) (80 oz × 0.02 oz)	10 × 10 in	23 lb	\$1,355.00
63052 [†]	10 lb × 0.002 lb (5 kg × 0.001 kg) (5,000 g × 1 g) (160 oz × 0.05 oz)	10 × 10 in	23 lb	\$1,355.00
63051 [†]	25 lb × 0.005 lb (10 kg × 0.002 kg) (10,000 g × 2 g) (400 oz × 0.10 oz)	10 × 10 in	23 lb	\$1,355.00
63050 [†]	50 lb × 0.01 lb (25 kg × 0.005 kg) (25,000 g × 5 g) (800 oz × 0.20 oz)	12 × 12 in	26 lb	\$1,445.00
63049 [†]	100 lb × 0.02 lb (50 kg × 0.01 kg) (50,000 g × 10 g) (1,600 oz × 0.50 oz)	12 × 12 in	26 lb	\$1,445.00
IQ plus 2100 with attachment bracket - 115 VAC				
63043 [†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) (2,500 g × 0.5 g) (80 oz × 0.02 oz)	10 × 10 in	23 lb	\$1,355.00
63042 [†]	10 lb × 0.002 lb (5 kg × 0.001 kg) (5,000 g × 1 g) (160 oz × 0.05 oz)	10 × 10 in	23 lb	\$1,355.00
63041 [†]	25 lb × 0.005 lb (10 kg × 0.002 kg) (10,000 g × 2 g) (400 oz × 0.10 oz)	10 × 10 in	23 lb	\$1,355.00
63040 [†]	50 lb × 0.01 lb (25 kg × 0.005 kg) (25,000 g × 5 g) (800 oz × 0.20 oz)	12 × 12 in	26 lb	\$1,445.00
63039 [†]	100 lb × 0.02 lb (50 kg × 0.01 kg) (50,000 g × 10 g) (1,600 oz × 0.50 oz)	12 × 12 in	26 lb	\$1,445.00
IQ plus 2100 with 12 in column - 115 VAC				
63048 [†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) (2,500 g × 0.5 g) (80 oz × 0.02 oz)	10 × 10 in	25 lb	\$1,355.00
63047 [†]	10 lb × 0.002 lb (5 kg × 0.001 kg) (5,000 g × 1 g) (160 oz × 0.05 oz)	10 × 10 in	25 lb	\$1,355.00
63046 [†]	25 lb × 0.005 lb (10 kg × 0.002 kg) (10,000 g × 2 g) (400 oz × 0.10 oz)	10 × 10 in	25 lb	\$1,355.00
63045 [†]	50 lb × 0.01 lb (25 kg × 0.005 kg) (25,000 g × 5 g) (800 oz × 0.20 oz)	12 × 12 in	28 lb	\$1,445.00
63044 [†]	100 lb × 0.02 lb (50 kg × 0.01 kg) (50,000 g × 10 g) (1,600 oz × 0.50 oz)	12 × 12 in	28 lb	\$1,445.00



[†] NEMA 5-15 plug

IQ Plus® 2100SL

Digital Bench Scale



IQ plus 2100SL with attachment bracket



IQ plus 2100 with tilt stand

IQ plus 2100 with column



Standard Features

- NEMA Type 4X/IP66
- 304 stainless steel construction
- Large, bold 0.8-inch LED display
- Status annunciators: lb, kg, oz, g, negative, motion, center of zero
- One full-duplex RS-232 port
- Two digital inputs for remote zero, print and units
- 12-inch column, attachment bracket or tilt stand for table, wall or under counter mounting
- Aluminum, single-point load cell
- Overload and upload stops on scale base
- Stainless steel, non-tactile feel, piezo zero and units buttons
- Unit of measure: kg, gm, lb, oz, lb/oz (lb/oz is not Legal for Trade)
- PreVent™ breather vent
- Spring-loaded platform
- Factory calibrated

Specifications

Power-AC:

Line Voltages:
115 or 230 VAC

Frequency:
50 or 60 Hz

Power Consumption:

70 mA at 115 VAC (8 W)
35 mA at 230 VAC (8 W)

Display Resolution:

10,000 graduations maximum

Digital Inputs:

Two inputs, TTL or switch closure, active-low

Scale Frame:

AISI304L, straight line finish, Ra=45 +/- 10

Scale Cover:

AISI304L, straight line finish, Ra=45 +/- 10

Serial Communications:

Full-duplex RS-232; 9600, 4800, 2400, 1200 bps; seven or eight data bits; even, odd or no parity

Display:

Six-digit LED display
Seven-segment, 0.8 in (20 mm) digits

LED Annunciators:

Negative value, center of zero, motion, kg, g, lb, oz

Keypad:

Two stainless steel piezo switches

Operating Temperature:

14 °F to 104 °F (-10 °C to 40 °C)

Rating/Material:

NEMA Type 4X/IP66, stainless steel

Load Cell:

Aluminum, environmentally sealed

Warranty:

Two-year limited

Approvals:

Indicator:

NTEP CC 00-045 Class III/IIIL 10,000 d
Measurement Canada, AM-5374;
UL and C-UL listed

Base:

NTEP CC 95-072, Class III 5,000 d


Approvals





Dimensions

Platform Dimensions	L	L1
10 × 10 in	10.25 in	10 in
12 × 12 in	12.25 in	12 in

Note: 1 in=25.4 mm

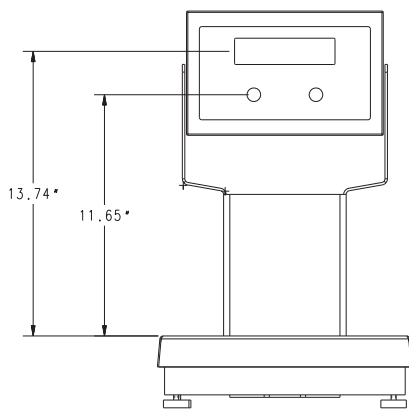

With 12 in column

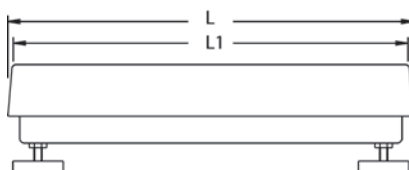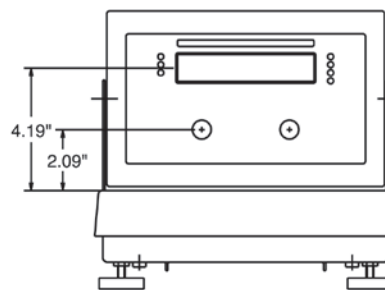

Part Number/Price

Part #	Capacity	Platform Size*	Est. Weight	Price
IQ plus 2100SL with tilt stand - 115 VAC				
65168 [†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) (2,500 g × 0.5 g) (80 oz × 0.02 oz)	10 × 10 in	21 lb	\$1,405.00
65169 [†]	10 lb × 0.002 lb (5 kg × 0.001 kg) (5,000 g × 1 g) (160 oz × 0.05 oz)	10 × 10 in	21 lb	\$1,405.00
65170 [†]	20 lb × 0.005 lb (10 kg × 0.002 kg) (10,000 g × 2 g) (320 oz × 0.1 oz)	10 × 10 in	21 lb	\$1,405.00
65171 [†]	30 lb × 0.01 lb (15 kg × 0.005 kg) (15,000 g × 5 g) (480 oz × 0.1 oz)	10 × 10 in	21 lb	\$1,405.00
65172 [†]	30 lb × 0.01 lb (15 kg × 0.005 kg) (15,000 g × 5 g) (480 oz × 0.1 oz)	12 × 12 in	24 lb	\$1,495.00
65173 [†]	50 lb × 0.01 lb (25 kg × 0.005 kg) (25,000 g × 5 g) (800 oz × 0.20 oz)	12 × 12 in	24 lb	\$1,495.00
65174 [†]	100 lb × 0.02 lb (50 kg × 0.01 kg) (50,000 g × 10 g) (1,600 oz × 0.50 oz)	12 × 12 in	24 lb	\$1,495.00
IQ plus 2100SL with attachment bracket - 115 VAC				
65175 [†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) (2,500 g × 0.5 g) (80 oz × 0.02 oz)	10 × 10 in	21 lb	\$1,405.00
65176 [†]	10 lb × 0.002 lb (5 kg × 0.001 kg) (5,000 g × 1 g) (160 oz × 0.05 oz)	10 × 10 in	21 lb	\$1,405.00
65177 [†]	20 lb × 0.005 lb (10 kg × 0.002 kg) (10,000 g × 2 g) (320 oz × 0.1 oz)	10 × 10 in	21 lb	\$1,405.00
65178 [†]	30 lb × 0.01 lb (15 kg × 0.005 kg) (15,000 g × 5 g) (480 oz × 0.1 oz)	10 × 10 in	21 lb	\$1,405.00
65179 [†]	30 lb × 0.01 lb (15 kg × 0.005 kg) (15,000 g × 5 g) (480 oz × 0.1 oz)	12 × 12 in	24 lb	\$1,495.00
65180 [†]	50 lb × 0.01 lb (25 kg × 0.005 kg) (25,000 g × 5 g) (800 oz × 0.20 oz)	12 × 12 in	24 lb	\$1,495.00
65181 [†]	100 lb × 0.02 lb (50 kg × 0.01 kg) (50,000 g × 10 g) (1,600 oz × 0.50 oz)	12 × 12 in	24 lb	\$1,495.00
IQ plus 2100SL with 12 in column - 115 VAC				
65182 [†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) (2,500 g × 0.5 g) (80 oz × 0.02 oz)	10 × 10 in	23 lb	\$1,405.00
65183 [†]	10 lb × 0.002 lb (5 kg × 0.001 kg) (5,000 g × 1 g) (160 oz × 0.05 oz)	10 × 10 in	23 lb	\$1,405.00
65184 [†]	20 lb × 0.005 lb (10 kg × 0.002 kg) (10,000 g × 2 g) (320 oz × 0.1 oz)	10 × 10 in	23 lb	\$1,405.00
65185 [†]	30 lb × 0.01 lb (15 kg × 0.005 kg) (15,000 g × 5 g) (480 oz × 0.1 oz)	10 × 10 in	23 lb	\$1,405.00
65186 [†]	30 lb × 0.01 lb (15 kg × 0.005 kg) (15,000 g × 5 g) (480 oz × 0.1 oz)	12 × 12 in	26 lb	\$1,495.00
65187 [†]	50 lb × 0.01 lb (25 kg × 0.005 kg) (25,000 g × 5 g) (800 oz × 0.20 oz)	12 × 12 in	26 lb	\$1,495.00
65188 [†]	100 lb × 0.02 lb (50 kg × 0.01 kg) (50,000 g × 10 g) (1,600 oz × 0.50 oz)	12 × 12 in	26 lb	\$1,495.00



CW-90

Over/Under Checkweigher



Specifications

Power AC:

Line Voltages:

115/230 VAC

Frequency:

50/60 Hz

Power Consumption:

1.5 A at 115 VAC (8 W)

0.75 A at 230 VAC (8 W)

Measurement Rate:

960,480, 240, 120, 60, 30, 15, 7.5 per second

System Linearity:

±0.01% full scale

Digital I/O:

Four channels on CPU board

Circuit Protection:

RFI, EMI, ESD protection

Display:

Large 0.8 in, 14 segment, six digit high-intensity red LED display

Scale Frame:

AISI304L, straight line finish, Ra=45 +/- 10

Scale Cover:

AISI304L, straight line finish, Ra=45 +/- 10

Annunciators:

Designators for %, kg, gm, lb, oz, center of zero, G/B, N, T, PT, neg, motion

Operating Temperature:

Legal: 14 °F to 104 °F (-10 °C to 40 °C)

Rating/Material:

IP66, stainless steel

Resolution:

Display: 100,000

Load Cell:

Aluminum, environmentally sealed

Warranty:

Two-year limited

Approvals:

Indicator:

NTEP CC 08-092, Class III/IIIL 10,000 d

Measurement Canada AM-5710, Class III 10,000 d

OIML R76/2006-GBI-10.02

TC11569

UL and CUL listed

CE marked

Scale:

NTEP CC 95-072, Class III 5,000 d

Measurement Canada AM-5082

NSF

Approvals



CHECKWEIGHERS

Standard Features

- Membrane keypad consisting of ZERO, UNITS, PRINT, TARE, OVER, UNDER, ID, TARGET, 0-9, CLEAR, DECIMAL, ENTER, MENU, POWER
- 304 stainless steel, IP66 rated indicator
- PreVent™ breather vent
- Storage for up to 50 IDs
- Unit of measure: kg, gm, lb, oz, lb/oz (lb/oz is not Legal for Trade)
- High-intensity LED display
- Battery backed time and date
- Two full-duplex RS-232 serial ports
- Configurable print formats
- Audit trail tracking
- Optional communications: Ethernet, USB or fiber -optic
- Four configurable Digital I/O
- Reflash memory to upgrade firmware
- Auto-print capability
- Accumulator
- Factory calibrated

Scale

- Aluminum, environmentally sealed load cell
- 304 stainless steel
- Meets HACCP requirements
- Five-point overload protection

Part Number/Price


Part #	Capacity	Platform Dimensions	Column Height	Est. Weight	Price
115 VAC					
105957†	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) or (80 oz × 0.02 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$1,555.00
105958†	10 lb × 0.002 lb (5 kg × 0.001 kg) or (160 oz × 0.05 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$1,555.00
105959†	25 lb × 0.005 lb (10 kg × 0.002 kg) or (400 oz × 0.1 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$1,555.00
105960†	25 lb × 0.005 lb (10 kg × 0.002 kg) or (400 oz × 0.1 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$1,645.00
105961†	50 lb × 0.01 lb (25 kg × 0.005 kg) or (800 oz × 0.2 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$1,645.00
105962†	100 lb × 0.02 lb (50 kg × 0.01 kg) or (1,600 oz × 0.5 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$1,645.00
230 VAC					
118891†	2.5 kg × 0.0005 kg (5 lb × 0.001 lb) or (80 oz × 0.02 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$1,555.00
118892†	5 kg × 0.001 kg (10 lb × 0.002 lb) or (160 oz × 0.05 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$1,555.00
118893†	10 kg × 0.002 kg (25 lb × 0.005 lb) or (400 oz × 0.1 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$1,555.00
118895†	10 kg × 0.002 kg (25 lb × 0.005 lb) or (400 oz × 0.1 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$1,645.00
118896†	25 kg × 0.005 kg (50 lb × 0.01 lb) or (800 oz × 0.2 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$1,645.00
118897†	50 kg × 0.01 kg (100 lb × 0.02 lb) or (1,600 oz × 0.5 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$1,645.00
230 VAC CE marked/OIML approved					
106123††	3 kg × 0.001 kg	254 × 254 × 108 mm	305 mm	13.2 kg	\$1,555.00
106124††	6 kg × 0.002 kg	254 × 254 × 108 mm	305 mm	13.2 kg	\$1,555.00
106125††	15 kg × 0.005 kg	254 × 254 × 108 mm	305 mm	13.2 kg	\$1,555.00
106126††	15 kg × 0.005 kg	305 × 305 × 108 mm	305 mm	15 kg	\$1,645.00
106127††	30 kg × 0.01 kg	305 × 305 × 108 mm	305 mm	15 kg	\$1,645.00
106128††	60 kg × 0.02 kg	305 × 305 × 108 mm	305 mm	15 kg	\$1,645.00



Options/Accessories

Part #	Description	Price
200578	Ethernet TCP/IP and cable with attached cord grip	\$440.00
77142	Ethernet TCP/IP card	\$420.00
206272	Wireless LAN card RS232/Wi-Fi 802.11 a/b	\$570.00
95357	USB cable, Type A to mini-B, 1 m	\$11.00
171968	Firmware download cable	\$39.00
96736	Fiber-optic board	\$250.00
78026	Fiber-optic, duplex cable 100 ft	\$175.00
80892	Fiber-optic cutter	\$12.00
117358	WeighVault™ (requires part number 77142 or 206272)	\$265.00

Note: 1 in=25.4 mm

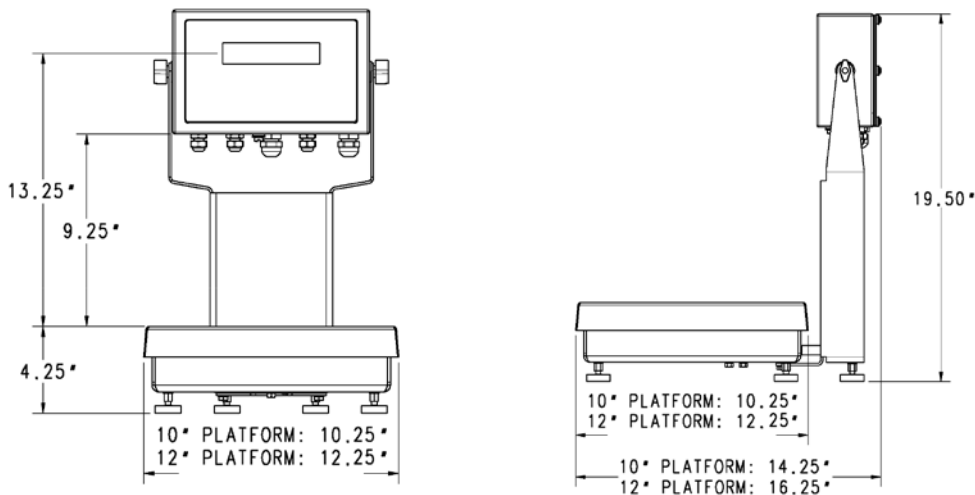

CHECKWEIGHERS

CW-90X

Over/Under Washdown Checkweigher



WeighVault
REVOLUTION
SCALE SOFTWARE

Approvals



Standard Features

- Piezo keypad consisting of ZERO, UNITS, PRINT, TARE, OVER, UNDER, ID, TARGET, ENTER, MENU, POWER
 - 304 stainless steel, IP69K rated indicator
 - PreVent™ breather vent
 - Storage for up to 50 IDs
 - Unit of measure: kg, gm, lb, oz, lb/oz (lb/oz is not Legal for Trade)
 - High-intensity LED display
 - Battery backed time and date
 - Two full-duplex RS-232 serial ports
 - Configurable print formats
 - Audit trail tracking
 - Optional communications: Ethernet, USB or Fiber-optic
 - Four configurable Digital I/O
 - Reflash memory to upgrade firmware
 - Auto print capability
 - Accumulator
 - Factory calibrated
- ### Scale Base
- IP69K, stainless steel, hermetically sealed load cell
 - 304 stainless steel
 - Meets HACCP requirements
 - Five point overload protection

Specifications

Power AC:

Line Voltages:

115/230 VAC

Frequency:

50/60 Hz

Power Consumption:

1.5 A at 115 VAC (8 W)

0.75 A at 230 VAC (8 W)

Measurement Rate:

960,480, 240, 120, 60, 30, 15, 7.5 per second

System Linearity:

±0.01% full scale

Digital I/O:

Four channels on CPU board

Circuit Protection:

RFI, EMI, ESD protection

Display:

Large 0.8 in, 14 segment, six digit high-intensity red LED display

Scale Frame:

AISI304L, straight line finish, Ra=45 +/- 10

Scale Cover:

AISI304L, straight line finish, Ra=45 +/- 10

Annunciators:

Designators for %, kg, gm, lb, oz, center of zero, G/B, N, T, PT, neg, motion

Operating Temperature:

Legal: 14 °F to 104 °F (-10 °C to 40 °C)

Rating/Material:

IP69K, stainless steel

Resolution:

Display: 100,000

Load Cell:

Stainless steel, hermetically sealed

Warranty:

Three-year limited

Approvals:

Indicator:

NTEP CC 08-092, Class III/IIIL 10,000 d

Measurement Canada AM-5710, Class III 10,000 d

OIML R76/2006-GBI-10.02

TC11569

cULus Listed

CE Marked

Scale:

NTEP CC 95-072, Class III 5,000 d

Measurement Canada AM-5082

NSF

Part Number/Price


Part #	Capacity	Platform Dimensions	Column Height	Est. Weight	Price
115 VAC					
105963 [†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) or (80 oz × 0.02 oz)	10 × 10 × 4.25 in	12 in	29lb	\$2,167.00
105965 [†]	10 lb × 0.002 lb (5 kg × 0.001 kg) or (160 oz × 0.05 oz)	10 × 10 × 4.25 in	12 in	29lb	\$2,167.00
105966 [†]	25 lb × 0.005 lb (10 kg × 0.002 kg) or (400 oz × 0.1 oz)	10 × 10 × 4.25 in	12 in	29lb	\$2,167.00
105967 [†]	25 lb × 0.005 lb (10 kg × 0.002 kg) or (400 oz × 0.1 oz)	12 × 12 × 4.25 in	12 in	33lb	\$2,257.00
105968 [†]	50 lb × 0.01 lb (25 kg × 0.005 kg) or (800 oz × 0.2 oz)	12 × 12 × 4.25 in	12 in	33lb	\$2,257.00
105969 [†]	100 lb × 0.02 lb (50 kg × 0.01 kg) or (1,600 oz × 0.5 oz)	12 × 12 × 4.25 in	12 in	33lb	\$2,257.00
230 VAC					
118899 [†]	2.5 kg × 0.0005 kg (5 lb × 0.001 lb) or (80 oz × 0.02 oz)	10 × 10 × 4.25 in	12 in	29lb	\$2,167.00
118900 [†]	5 kg × 0.001 kg (10 lb × 0.002 lb) or (160 oz × 0.05 oz)	10 × 10 × 4.25 in	12 in	29lb	\$2,167.00
118901 [†]	10 kg × 0.002 kg (25 lb × 0.005 lb) or (400 oz × 0.1 oz)	10 × 10 × 4.25 in	12 in	29lb	\$2,167.00
118902 [†]	10 kg × 0.002 kg (25 lb × 0.005 lb) or (400 oz × 0.1 oz)	12 × 12 × 4.25 in	12 in	33lb	\$2,257.00
118903 [†]	25 kg × 0.005 kg (50 lb × 0.01 lb) or (800 oz × 0.2 oz)	12 × 12 × 4.25 in	12 in	33lb	\$2,257.00
118904 [†]	50 kg × 0.01 kg (100 lb × 0.02 lb) or (1,600 oz × 0.5 oz)	12 × 12 × 4.25 in	12 in	33lb	\$2,257.00
230 VAC CE marked/OIML approved					
106129 ^{††}	3 kg × 0.001 kg	254 × 254 × 108 mm	305 mm	13.2 kg	\$2,167.00
106130 ^{††}	6 kg × 0.002 kg	254 × 254 × 108 mm	305 mm	13.2 kg	\$2,167.00
106131 ^{††}	15 kg × 0.005 kg	254 × 254 × 108 mm	305 mm	13.2 kg	\$2,167.00
106132 ^{††}	15 kg × 0.005 kg	305 × 305 × 108 mm	305 mm	15 kg	\$2,257.00
106133 ^{††}	30 kg × 0.01 kg	305 × 305 × 108 mm	305 mm	15 kg	\$2,257.00
106134 ^{††}	60 kg × 0.02 kg	305 × 305 × 108 mm	305 mm	15 kg	\$2,257.00



Options/Accessories

Part #	Description	Price
200578	Ethernet TCP/IP and cable with attached cord grip	\$440.00
77142	Ethernet TCP/IP card	\$420.00
206272	Wireless LAN card RS232/Wi-Fi 802.11 a/b	\$570.00
95357	USB cable, Type A to mini-B, 1 m	\$11.00
171968	Firmware download cable	\$39.00
96736	Fiber-optic board	\$250.00
78026	Fiber-optic, duplex cable 100 ft	\$175.00
80892	Fiber-optic cutter	\$12.00
117358	WeighVault [™] (requires part number 77142 or 206272)	\$265.00

Note: 1 in=25.4 mm

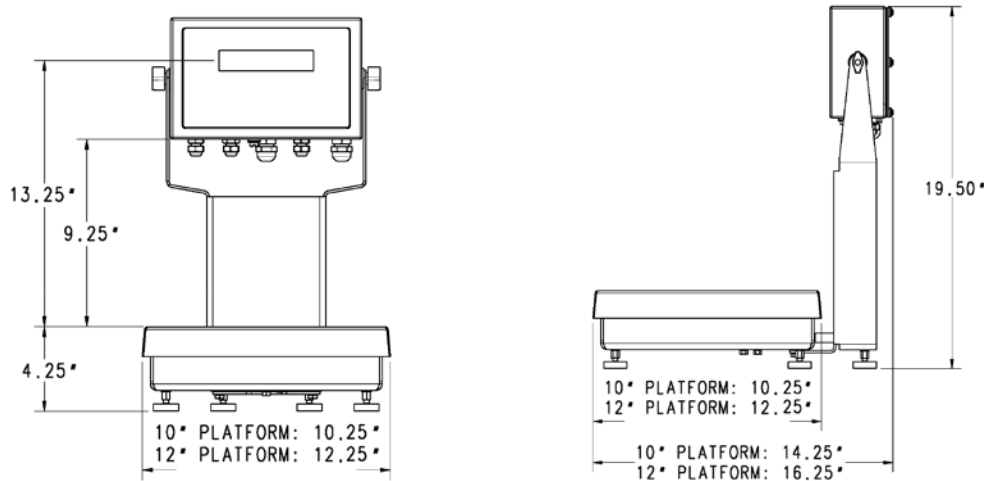

CHECKWEIGHERS

