

350-10-3

DUAL-RAMP

WHEELCHAIR SCALE

Rice Lake's 350-10-3 dual-ramp wheelchair scale with handrail allows high-capacity, accurate weighing for a wide range of patients. Convenient keypad tare reduces errors and increases efficiency. Foldable and lightweight, this sturdy scale is easily transported on two heavy-duty rear wheels to any location.

PG
40

FEATURES

- Large LCD display
- Antimicrobial keypad
- Two wheels for easy transport
- Dual ramp
- Nonslip platform
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- Body mass index (BMI) function
- Factory calibrated
- Easy to store, folded depth is 11.75 in (29.8 cm)

SPECIFICATIONS

Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions Without Ramps:

(L × W × H)
29.50 × 32.00 × 2.40 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours of continuous use with batteries
Automatic power-off can be configured

Display:

Five-digit LCD display, 0.75 in (1.9 cm) digit height


Temperature:

Operating:
50 °F to 104 °F (10 °C to 40 °C)

Warranty:

Two-year limited



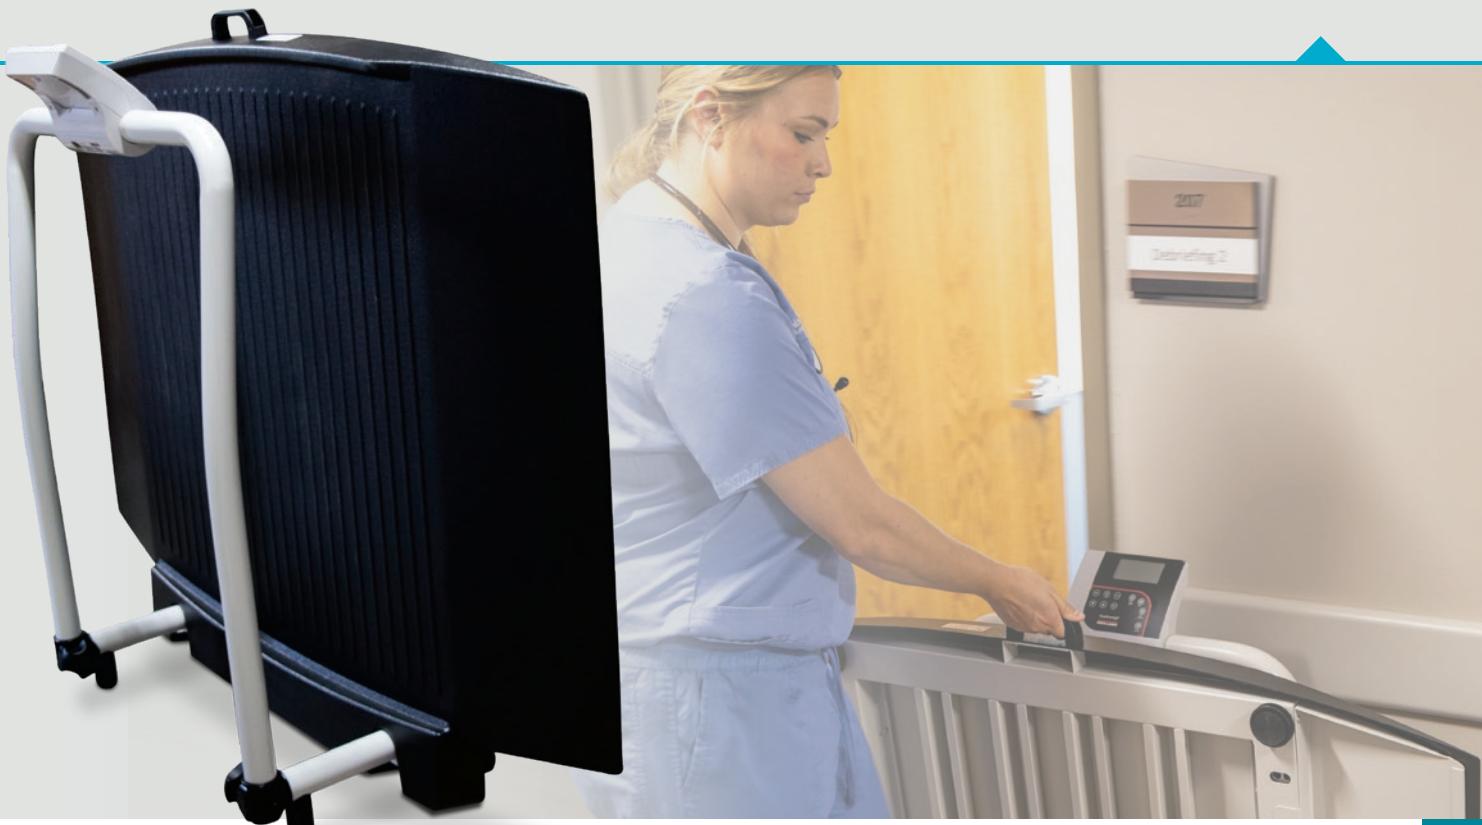

WHEELCHAIR SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
350-10-3	1,000 x 0.2 lb (450 x 0.1 kg)	USB	141447
350-10-3BLE	1,000 x 0.2 lb (450 x 0.1 kg)	WPAN	194736

OPTIONS

DESCRIPTION	PART #
9VDC adapter, 100-240V, NEMA 1-15 plug, cULus power supply*	133077
9VDC adapter, 100-240V, NEMA 1-15 plug, medical grade power supply	115655
9VDC adapter, 100-240V, CEE 7/16 plug, medical grade power supply**	102508

*NEMA 1-15 Plug **CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
350-10-3	141447	51	42	14	102	216	216
350-10-3BLE	194736	51	42	14	102	216	216

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	48.50	123.2	E	38.00	96.5
B	32.00	81.3	F	45.00	114.3
C	2.40	6.1	G	29.50	74.9
D	9.30	23.6			

